


# How to use Import Glue

Game-rip meshes to Roblox-ready PBR maps, inside Blender.



## YOU START WITH

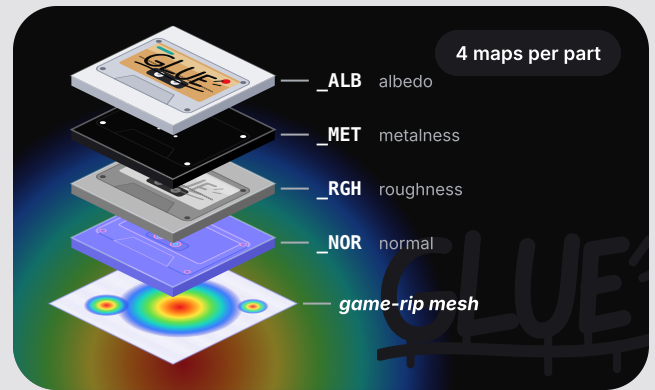

A game-rip mesh  
with its original  
materials



## Import Glue

crops or bakes each part on a  
duplicate



## YOU GET, PER PART



\_ALB



\_MET



\_RGH



\_NOR

## 1 Install it once, about a minute



1

### Download the zip

From the latest release on  
GitHub. Keep it zipped.



2

### Install from Disk

Edit > Preferences >  
Add-ons, then pick the zip.



3

### Enable it

Tick **Import Glue PBR Baker**  
in the add-on list.



4

### Open the panel

In the 3D Viewport press **N**,  
then the **Roblox** tab.

## 2 Bake your meshes the numbers match the panel on the right

### 1 Save your .blend

Outputs are written next to the saved file, so save before you start.

### 2 Choose what to bake

Select meshes in the viewport, or switch **Scope** to **All Scene Meshes** or  
**Collection**. The panel shows how many meshes it found.

### 3 Set the size


**Bake Resolution** and **Crop Ceiling** both default to 1024. Raise them  
only if the asset and your memory can take it.

### 4 Keep the texture check on

Leave **Run Texture Precheck** ticked. **Check Textures** runs the  
check by itself.

### 5 Press Run Import Glue

Blender looks busy until the bake finishes. Then use  
**Open Output Folder** under **Last Run**.

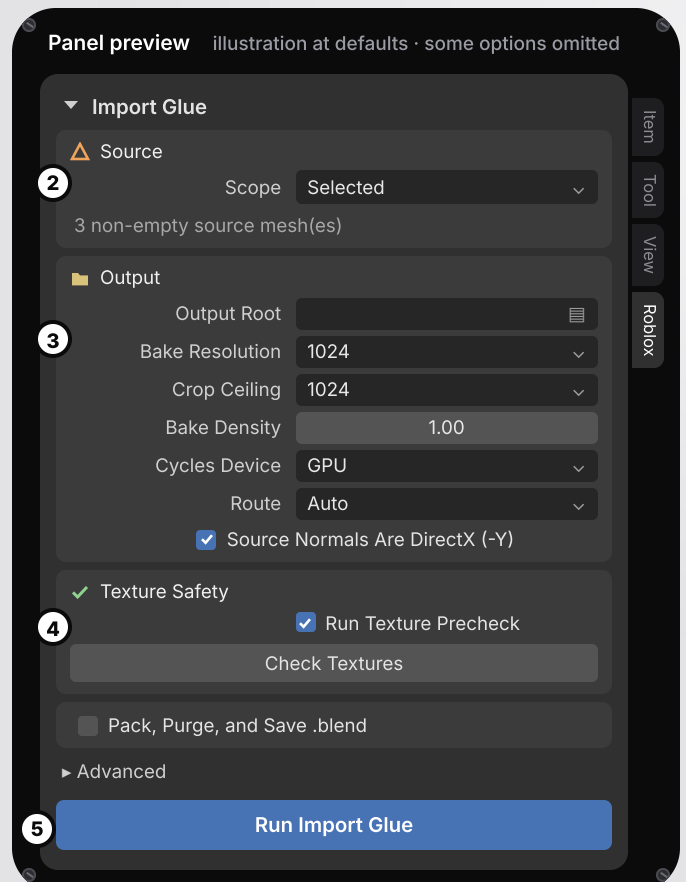

**YOUR ORIGINALS ARE SAFE.** Source objects,  
meshes, UVs and materials are never edited. Results land  
in a new output collection, and existing files are never  
silently overwritten.

**FIRST YES WINS**

# Routes, settings and fixes

## 3 How each part gets its maps with Route set to Auto, the first "yes" wins

### QUESTION 1


Does the part use one flat texture atlas, with compact UVs inside it?

YES  
↓

### Crop

**FASTEST**

Copies the part's exact rectangle straight out of the source textures. Nothing is rendered.



NO  
→

### QUESTION 2


Are its textures found, but the UVs need repacking?

YES  
↓

### Proxy bake

**REPACK**

Repacks the UVs on the duplicate, then bakes from the resolved textures.



NO  
→

### OTHERWISE


A complex shader graph, or a mesh with no usable UVs at all.

↓

### Graph bake

**CYCLES**

Bakes the original shader graph with Cycles. Meshes without UVs are auto-unwrapped first.



Cold · pixels copied, no render



full Cycles bake · hot

## 4 Settings worth knowing the black tag is the default

**Bake Resolution** **1024** **Crop Ceiling** **1024**

Upper limits for baked and cropped maps. They are ceilings, not targets.

**Bake Density** **1.00**

Multiplier (0.05 to 8) for the size bakes ask for. Raise it when bakes look soft but are not at the ceiling.

**Cycles Device** **GPU**

With no GPU, the run stops instead of quietly using the CPU.

**Route** **Auto**

Force one route with Crop Only, Proxy Only, Graph Only or Bake Only.

**Source Normals Are DirectX** **On**

Flips the green channel so normals come out in OpenGL form for Roblox.

## 5 Where your files go

```

my_scene.blend
my_scene_exports/
├─ _v32_done.json    resume list
├─ rbx_pbr_smart/    one run
│   ├─ Helmet_ALB.png
│   ├─ Helmet_MET.png
│   ├─ Helmet_RGH.png
│   ├─ Helmet_NOR.png
│   ├─ manifest.json  what ran
│   └─ run_log.txt    progress

```

Each run gets a fresh folder ( `rbx_pbr_smart2` , `3` ... ). Unchanged parts are carried over from the last run. Set **Output Root** to write elsewhere.

## 6 If something stops the run



### "Batch exceeds safety limit"

More than 16 meshes. Bake fewer at a time, or tick **Allow Oversized Batch** in Advanced.



### Missing textures

Point **Shared Texture Pool** (Advanced) at the folder that holds them, then **Check Textures**.



### No GPU available

Set **Cycles Device** to CPU, or tick **Allow CPU Fallback**. CPU bakes can take hours.



### Over the triangle limit

The limit is 20,000. Graph bakes are decimated to fit; other routes are rejected, so simplify the mesh.



### Blender looks frozen

It is baking. Watch progress in the system console or in `run_log.txt`.



### Updated the add-on?

Restart Blender after installing a new version so the new code loads.

### HEADLESS BATCH RUNS

Unzip the add-on folder first. Always pass `--res` and `--max-res`; without them, headless runs default to 4096 bake and 8192 crop.

```

blender -b "scene.blend" -P "import_glue_pbr_baker/run_headless.py"
-- --collection "Body" --res 1024 --max-res 1024

```