


Guide to using QP_QuickSB in QuPath


2026-01-08

Alex Meng


1. Base QuPath interface with a sample image from a sample project open.

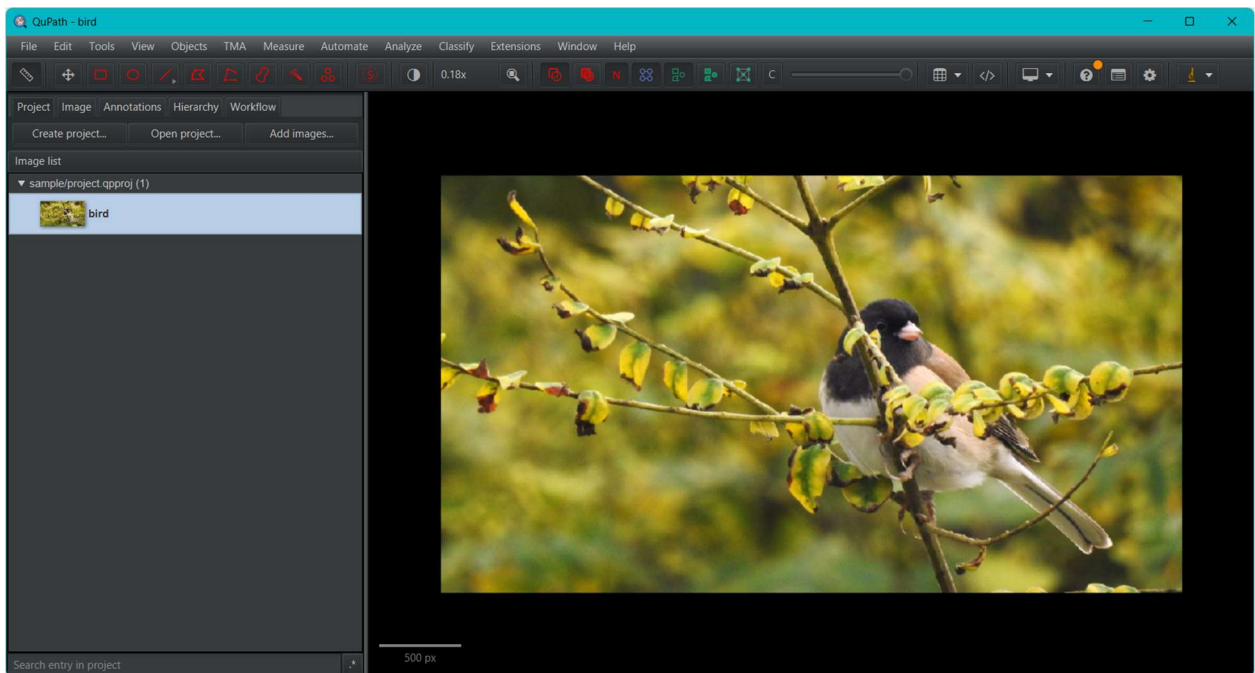


2. Open the ImageJ script runner

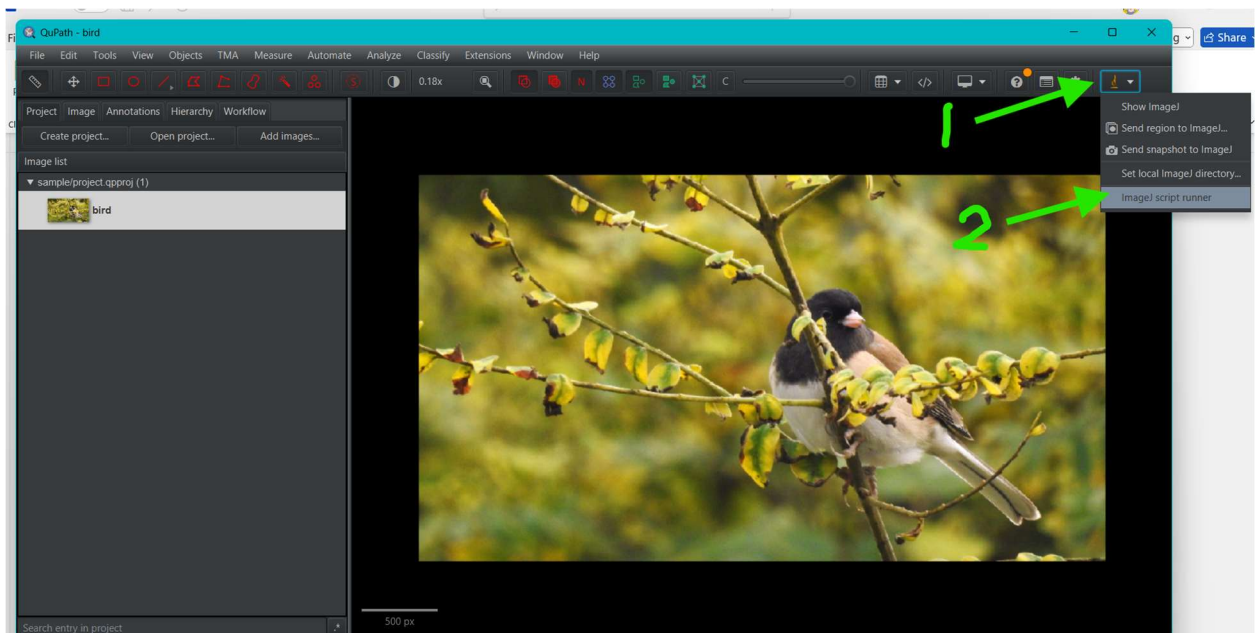

- ImageJ script runner interface. To open the downloaded script, go to File > Open and find the file.

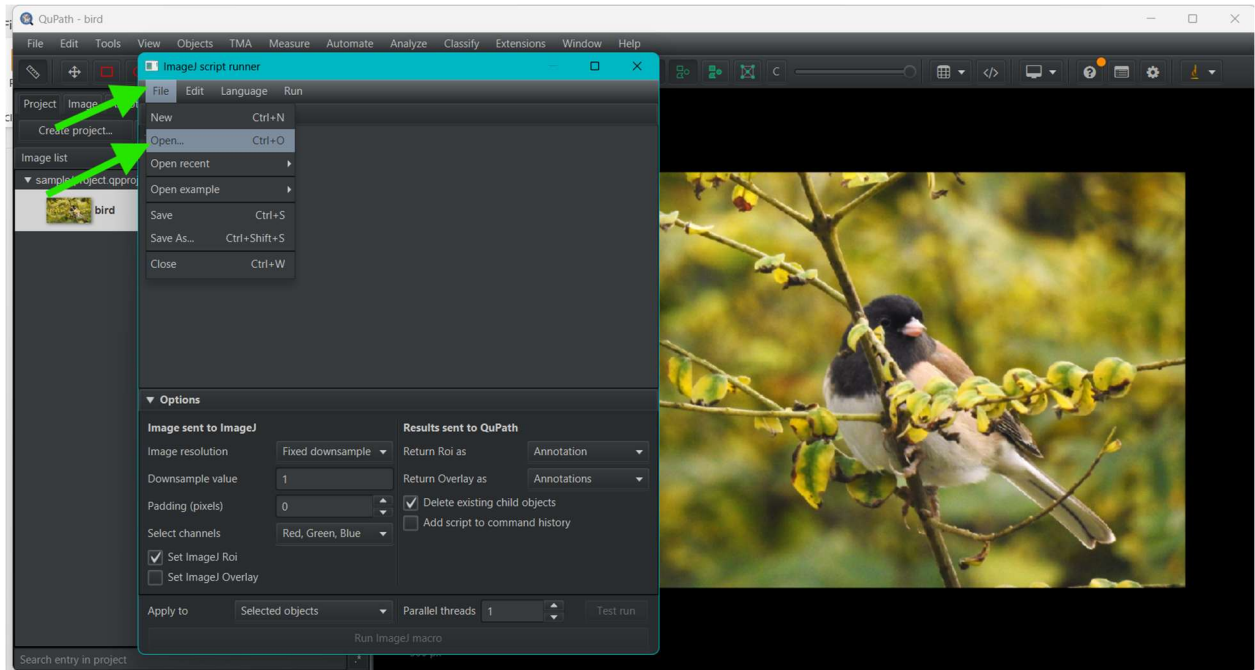

- After opening the script, you can change the parameters to suit your purpose. (I also added a selection area on the image, but ignore that for now.)

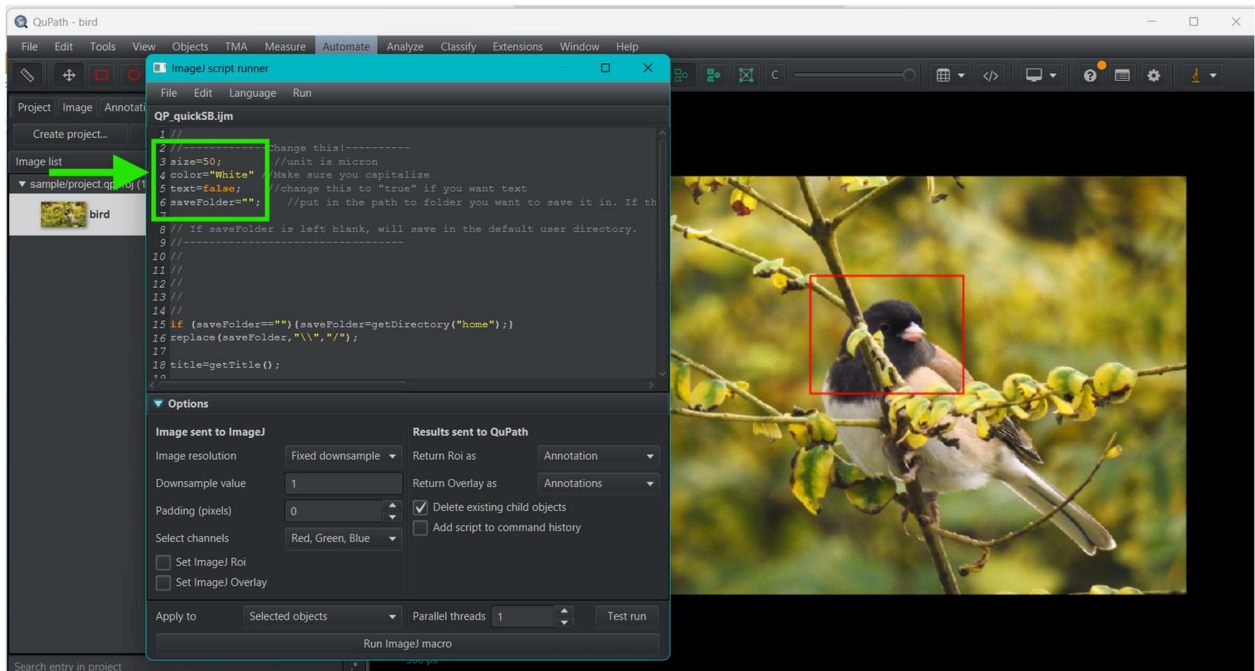

5. Here's a closer look at the parameters:


```

QP_quickSB.ijm
1 //
2 //-----Change this!-----
3 size=50;           //unit is micron
4 color="White"      //Make sure you capitalize
5 text=false;       //change this to "true" if you want text
6 saveFolder="";     //put in the path to folder you want to save it in. If t
7
8 // If saveFolder is left blank, will save in the default user directory.
9 //-----

```


- “**size**” is the length of your scale bar. This will be in whatever unit that the image itself is calibrated in and usually will be μm when dealing with microscopy images.
WARNING: Only change the number. Do not change the “=” sign or the “;”.
- “**color**” is the color of your scale bar. Use “White” or “Black” depending on the brightness of background and your image type.
WARNING: Follow the capitalization pattern and do not change the quotation marks or “;”.
- “**text**” decides if you want to have the “xx μm ” text that will be displayed next to your scale bar. If you want to turn on the text, change this value to true.
WARNING: Follow the capitalization pattern and do not add quotation marks or change “;”.
- “**saveFolder**” is where you want to save this image. If this is left blank, the user’s home directory will be used.

The user’s home directory can be found in the desktop folder:

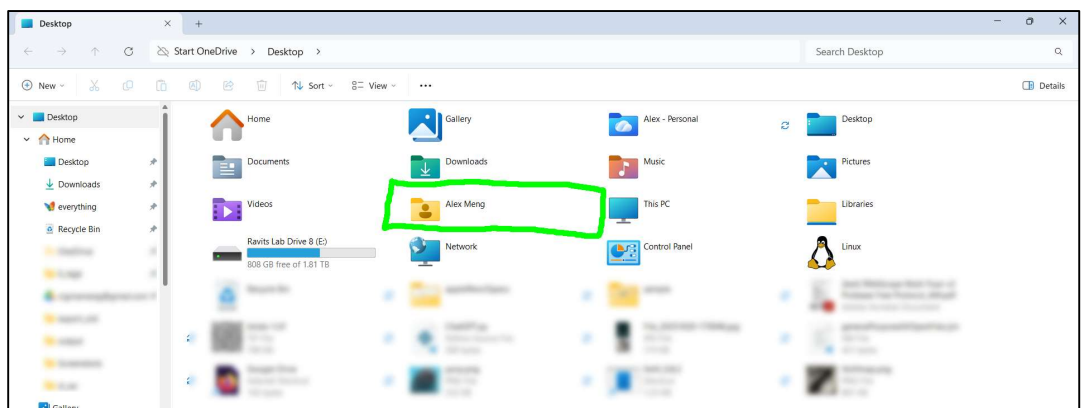


If you want to specify the path, go to the folder that you want to save it in, click the address bar at the top to make it display the current path, then copy it into the script.

The address bar in file explorer:

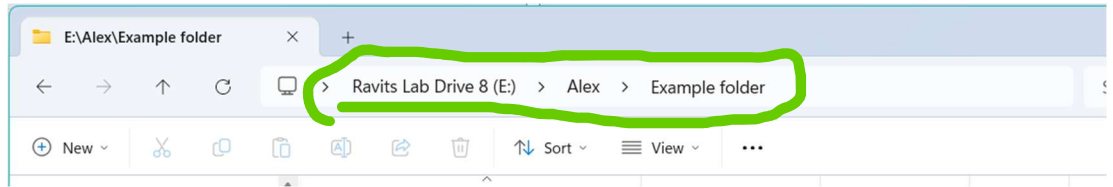

Clicking this bar shows the full path, which can be copied.

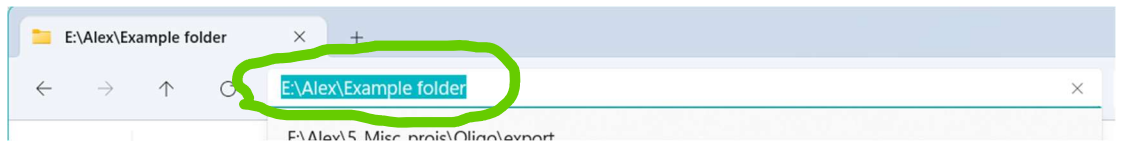

Due to some ImageJ string processing restrictions, if the path contains backslashes (“\”, which Windows uses by default), you have to manually add another backslash next to each one (“\\”) so that the path can be read correctly.

Here’s how it looks when directly pasted from file explorer:


```
6 saveFolder="E:\Alex\Example folder";
```

Here’s how it **should** look like with the double-backslashes:

```
6 saveFolder="E:\\Alex\\Example folder";
```


6. After configuring your parameters in the script, you should configure the parameters in the ImageJ script runner (this decides how QuPath “sends” the region to ImageJ for processing).

Here are the parameters that you should pay attention to:

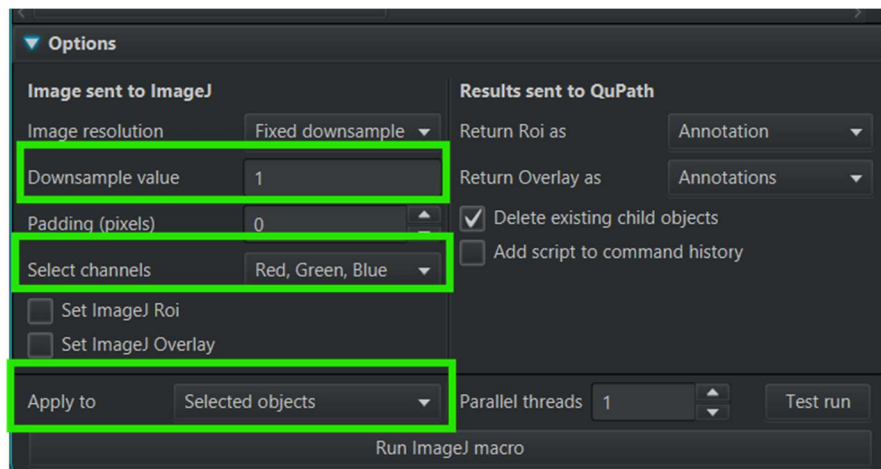

- **Downsample value:** Decides how compressed the image is. Set this to 1 if you do not want any compression. If you are selecting a large area, processing it uncompressed will use up a lot of memory. The number can be understood as the compression ratio i.e. “2” means the image size is halved before sent to ImageJ.
- **Select channels:** The channel(s) you want to include in the final image. (Note: I’m using a brightfield photo here, so it says “Red, Green, Blue.” If using a fluorescent image, you will see “DAPI, FITC” et c.)
- **Apply to:** Decides what parts of the currently opened image is cropped and saved. It’s set to “selected objects” by default, but you can also use “all annotations” if there are many annotations on the same image that you all want to export.


Here’s the full list of options:

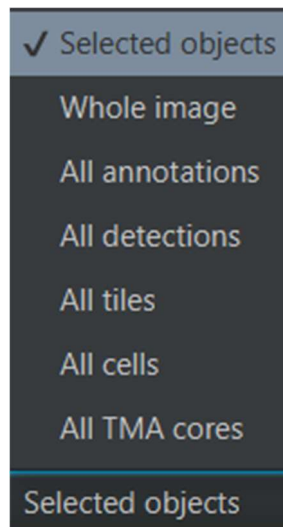

- For this script, other parameters that are not mentioned do not really matter.
7. Make/select the annotation of the region you want and click “Run ImageJ macro.”
 - If you are using “selected objects”, make sure you select them before running.
 8. After the progress bar finishes, check the destination folder for the exported file(s). The file name is formatted as the original image name followed by “_SBxx” where xx is the size of the scale bar.

Use Example

1. Set up of the script and script runner:

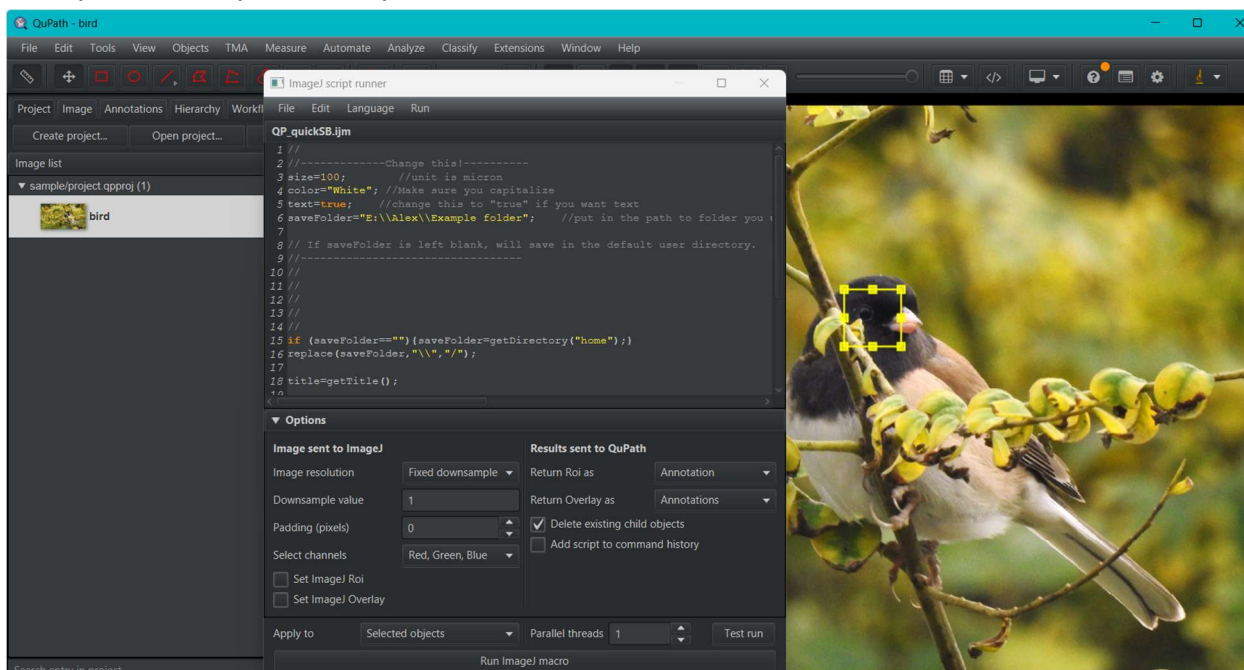

2. Output (Note: This picture's calibration unit is pixel.):

