



Runtime against qubit count

Each implementation's own timer, log-log; medians over available seeds. The reference's timer floors at 1 ms.
Apple M1 Pro, macOS 26.5.2, 10 cores, 32 GB; strictly sequential runs.


GHZ

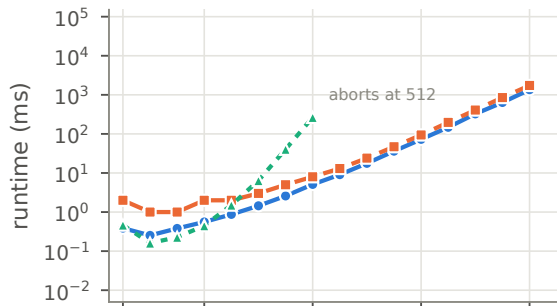


Bernstein-Vazirani

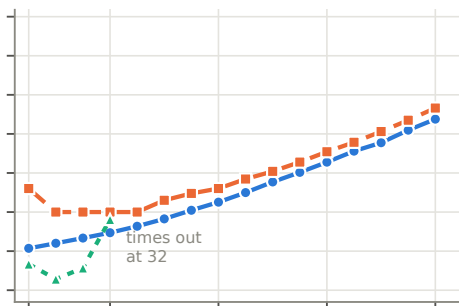


Deutsch-Jozsa

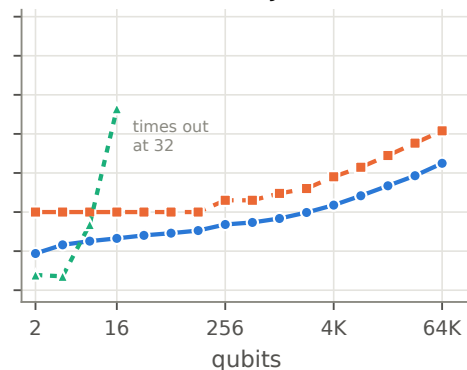

QFT

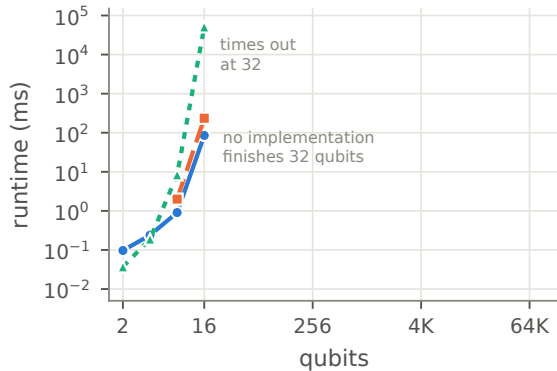

Grover

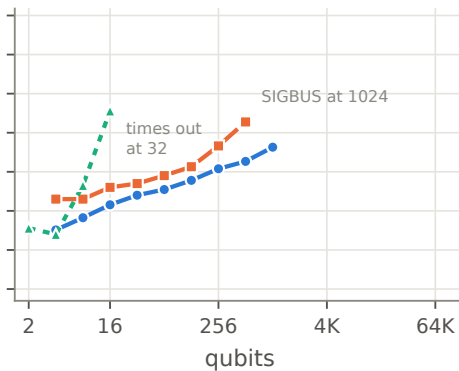

- gcflbddd (this crate)
- CFLOBDD (reference C++)
- CUDD ADD (control)