


JMS Header Field: JMS Expiration

- Length of time before expiration of message
 - Displayed in *milliseconds*
 - If set to 0, message does not expire
- Server expiration property
 - Overrides JMSEExpiration value set by JMS Activity
- Setting expiration
 - Activity's Advanced tab
 - Input tab

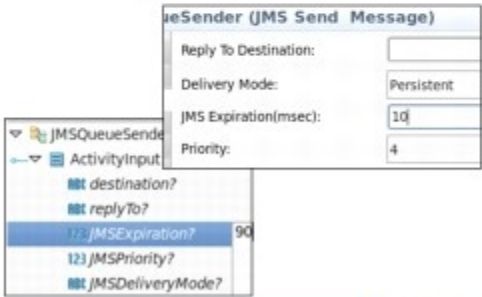

© TIBCO Software Inc. TIBCO Education Programs TIBCO

JMS Header Field: JMS Expiration

JMS Expiration represents the length of time in milliseconds that the message will live before expiration. If set to 0, message does not expire. If the server expiration property is set for a destination, it will override the JMSEExpiration value set by the message producer.

In BusinessWorks, you can set JMS Expiration in two places:

- *Advanced* tab - The value set using this field is applicable to all the messages sent by that particular activity.
- JMSEExpiration field on activity's *Input* tab - Time-to-Live of each message can be set dynamically using this field. This item overrides the JMSEExpiration set on the *Advanced* tab. These fields are set in seconds, but the JMSEExpiration property is displayed in milliseconds.



TIBCO Education Programs