Nozif Enes Kulling 1721221006

1.) data length = 4

obj.data[3] = 1.5

twice ('3') = 6


twice ('3') = '33'

twice name = null

Small (0) = frue

data map (twice) = [0,2,3,4]

data, filter (small) = [true, true, folse, false]

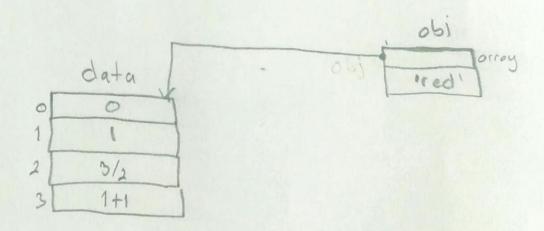

1

```
Nozif Enes Kizilain
1721221006
```

class Point & constructor (x, y) { · this.x =x this,y=y get length () { return Moth, sqr+ ((this.x = this.x) + (this.y = this.y); to String () { return 'Point: ('+ this.x+', + this.y+');;

5-)

4-)