



4.2 Application







6.1.1 Operation

Start by extracting the device name supplied in the

Error Code	Error Description	Description
401	Invalid Action	The service has no action of the name provided.


PART II – Porting and Configuration Guide

Two special subdirectories are available

- 1.





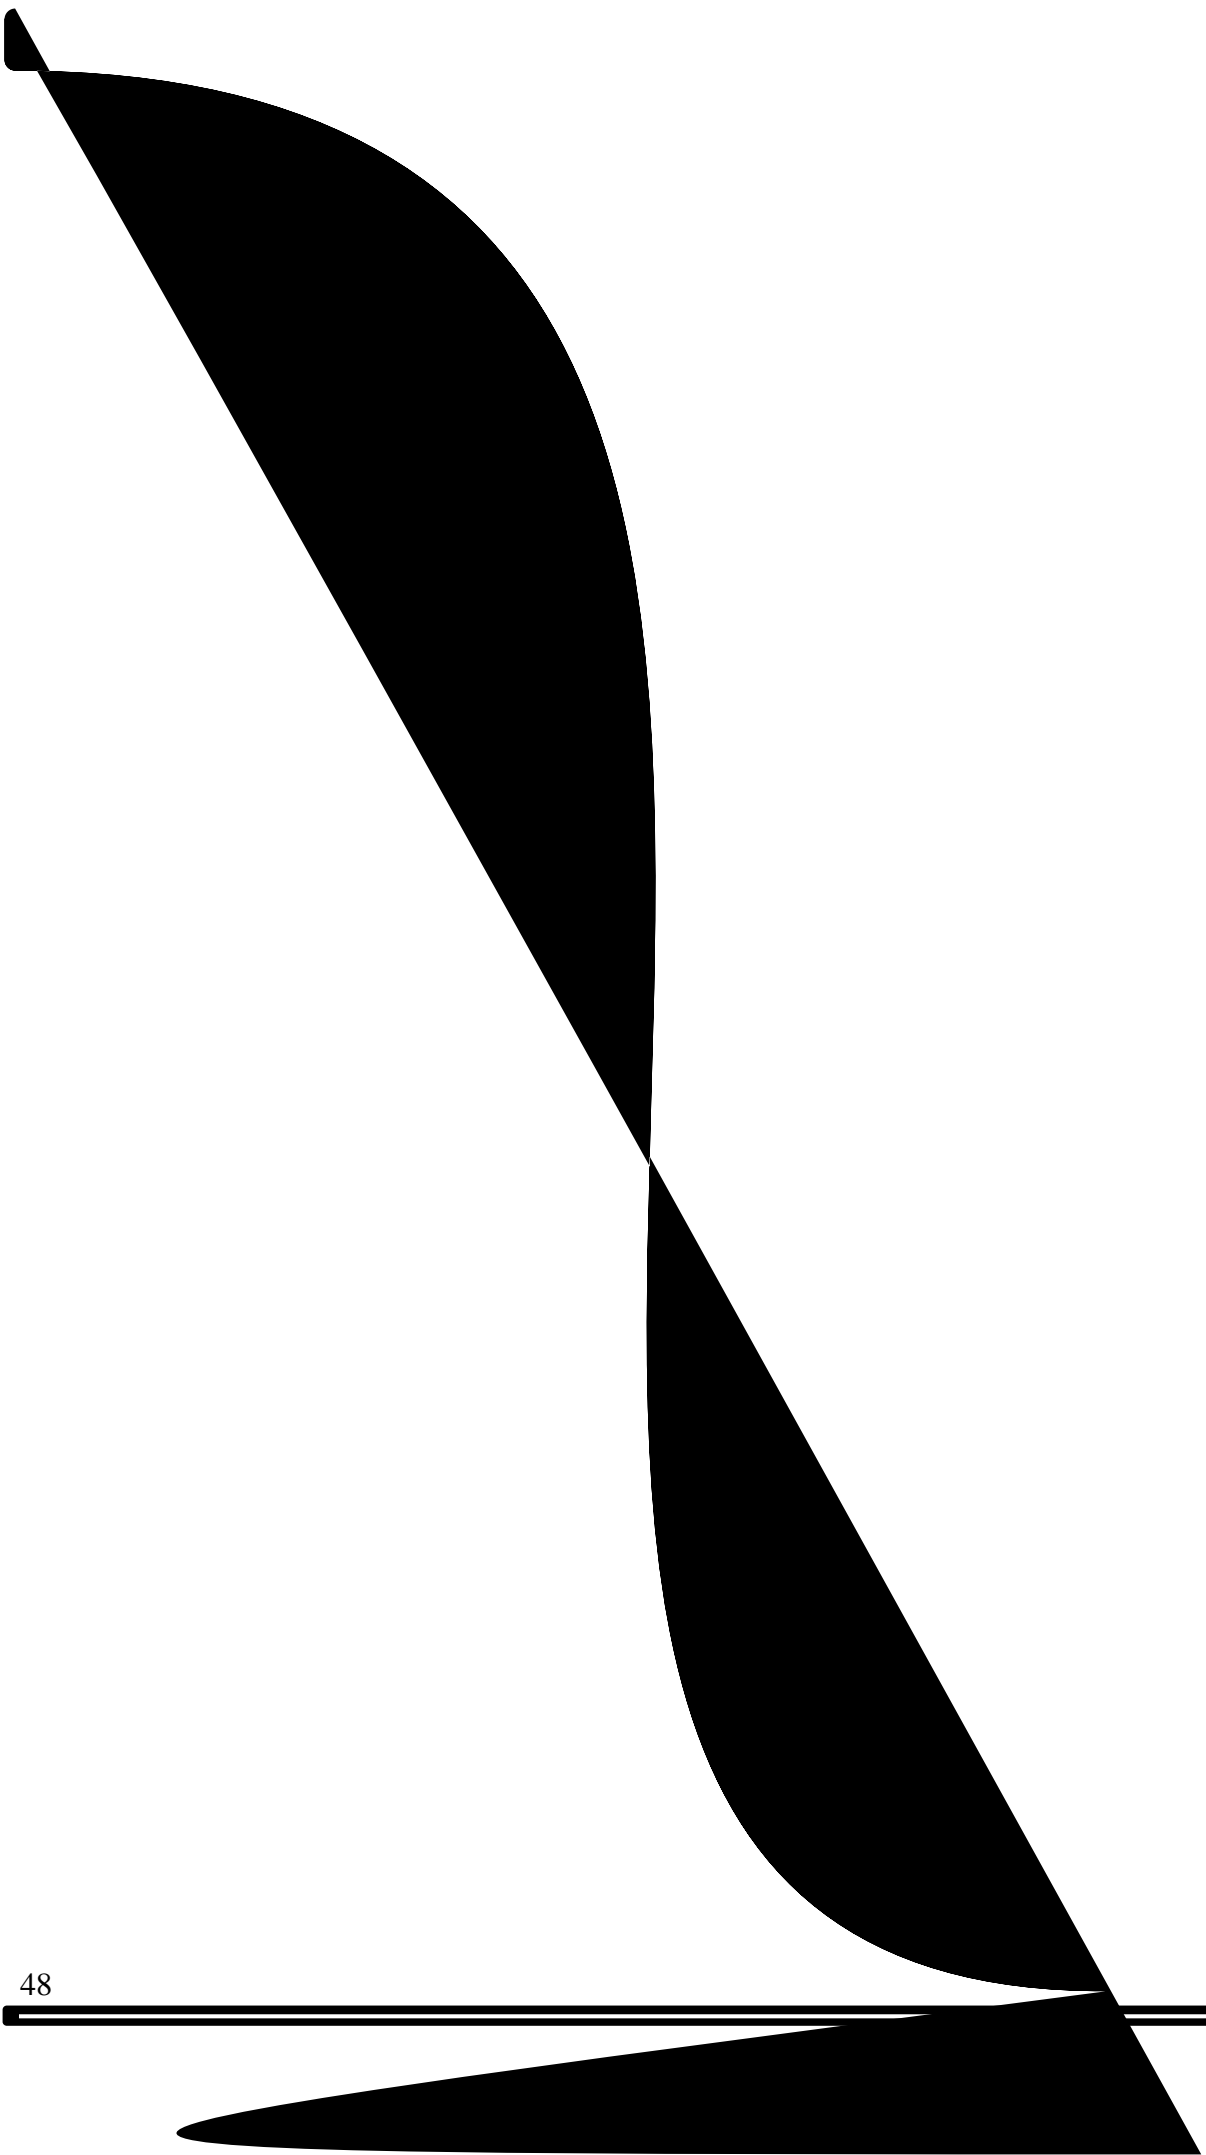





Appendix II

Sample Device Callback

Here is an example of an application callback implementing network light. The following section will demonstrate code to handle events generated as a result of a control (action) or event (subscription) request received by upnp device.


```
        {
            // must be initialized to zero
            IXML_Document *propertySet = 0;
            UPNP_CHAR temp[5];

            rtp_itoa(i, temp, 10);

            // add name and vaule of the changed
            // variable to the property set
            // this property set is sent to the subscribers
            // as the event notification
            UPnP_AddToPropertySet(&propertySet,

"LoadLevelStatus", temp);
```

