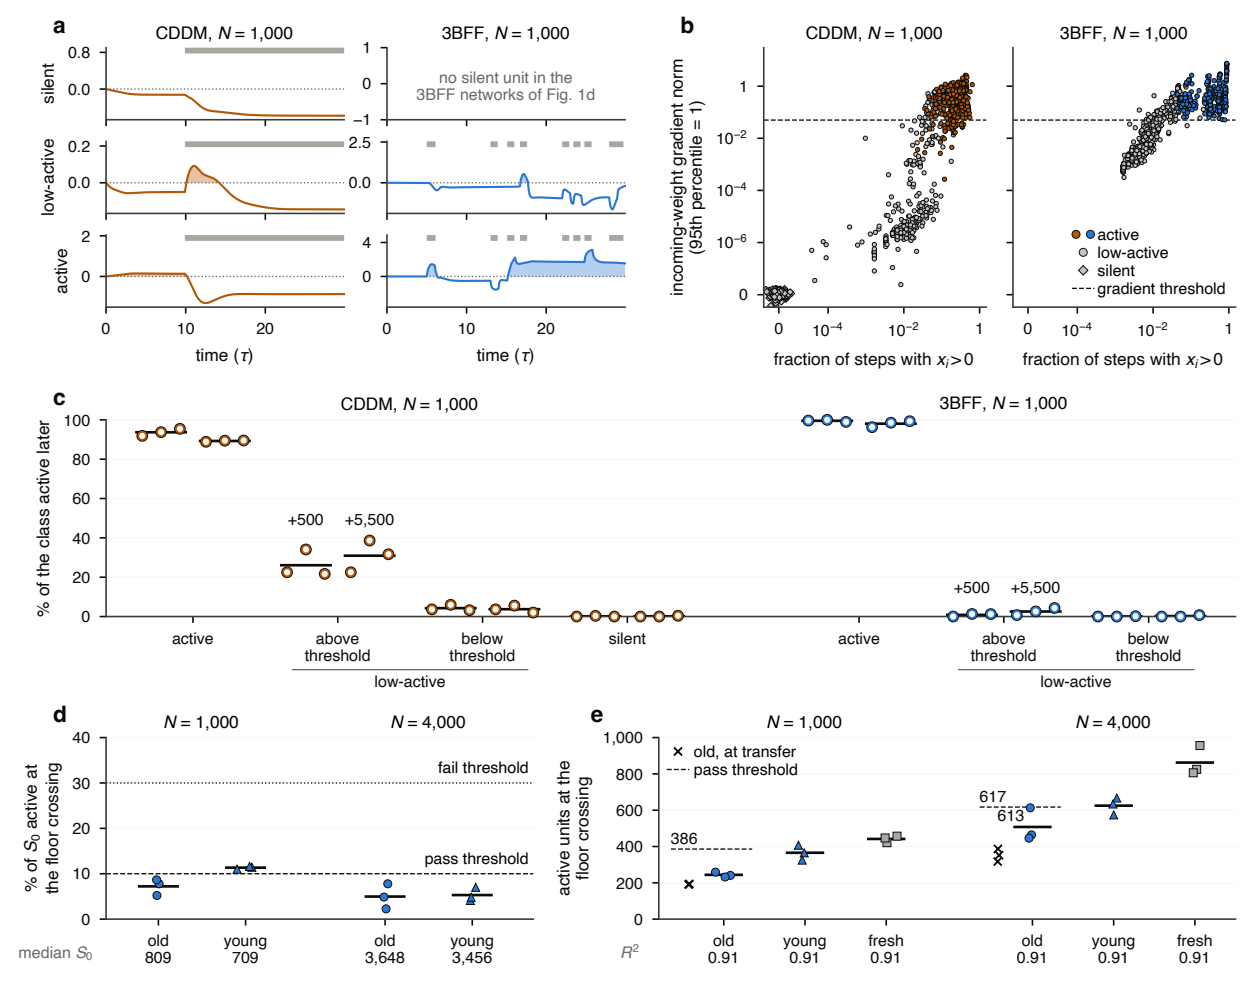

a
CDDM, N = 1,000
3BFF, N = 1,000
silent
low-active
active
no silent unit in the
3BFF networks of Fig. 1d
time (τ)
time (τ)
b
CDDM, N = 1,000
3BFF, N = 1,000
incoming-weight gradient norm
(95th percentile = 1)
active
low-active
silent
gradient threshold
fraction of steps with $x_i>0$
fraction of steps with $x_i>0$
c
CDDM, N = 1,000
3BFF, N = 1,000
% of the class active later
+500
+5,500
active
above threshold
below threshold
low-active
silent
active
+500
+5,500
above threshold
below threshold
low-active
d
N = 1,000
N = 4,000
% of S_0 active at the floor crossing
fail threshold
pass threshold
median S_0
old 809
young 709
old 3,648
young 3,456
e
N = 1,000
N = 4,000
active units at the floor crossing
old, at transfer
pass threshold
386
617
613
R^2
old 0.91
young 0.91
fresh 0.91
old 0.91
young 0.91
fresh 0.91