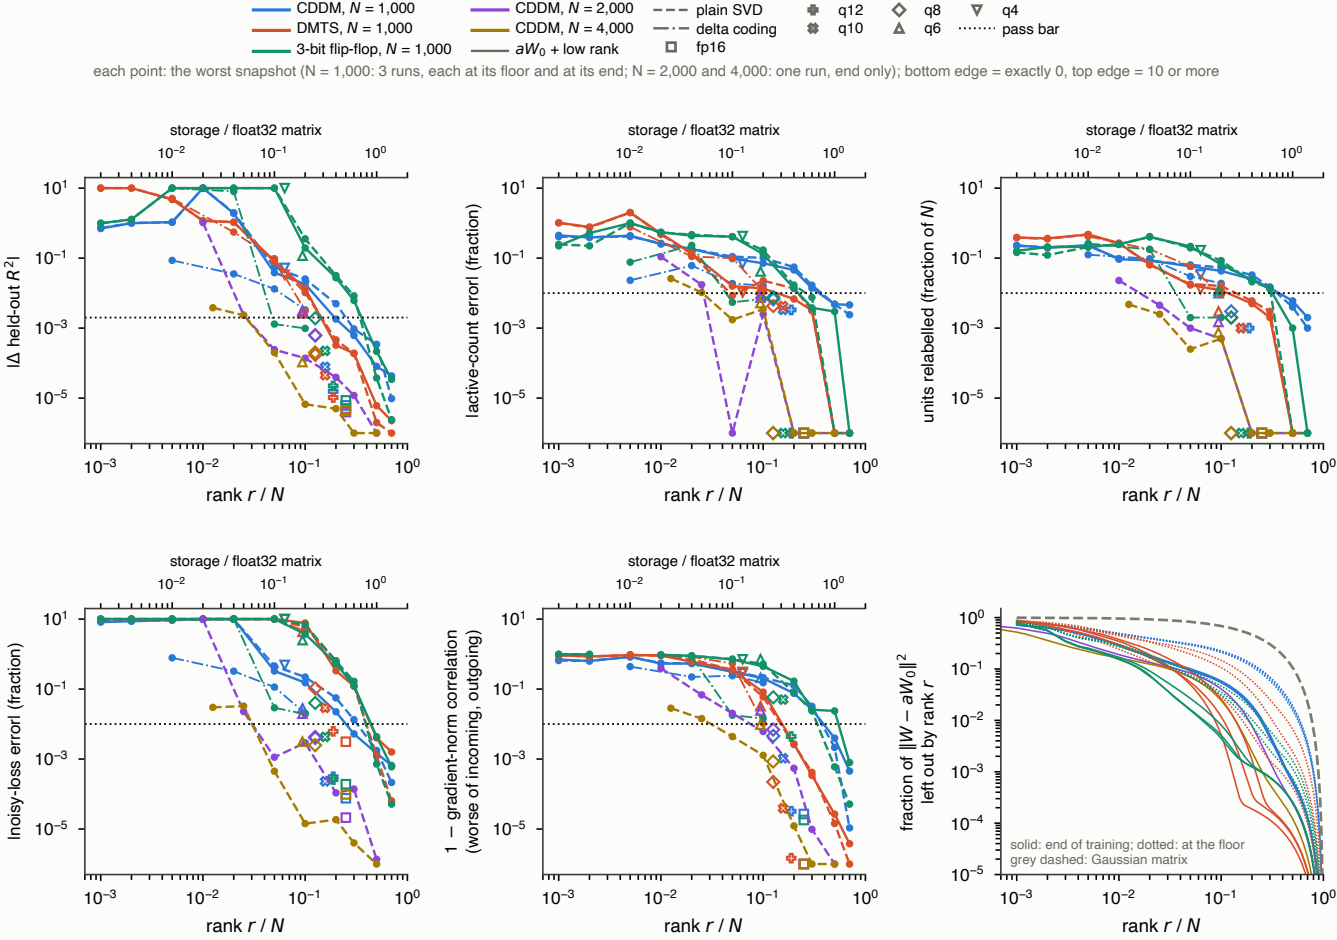

CDDM, N = 1,000
DMTS, N = 1,000
3-bit flip-flop, N = 1,000
CDDM, N = 2,000
CDDM, N = 4,000
aW0 + low rank
plain SVD
delta coding
fp16
q12
q10
q8
q6
q4
pass bar
each point: the worst snapshot (N = 1,000: 3 runs, each at its floor and at its end; N = 2,000 and 4,000: one run, end only); bottom edge = exactly 0, top edge = 10 or more
storage / float32 matrix
|Δ held-out R²|
|active-count error| (fraction)
units relabelled (fraction of N)
|noisy-loss error| (fraction)
1 − gradient-norm correlation (worse of incoming, outgoing)
fraction of ‖W − aW0‖² left out by rank r
rank r / N
solid: end of training; dotted: at the floor
grey dashed: Gaussian matrix