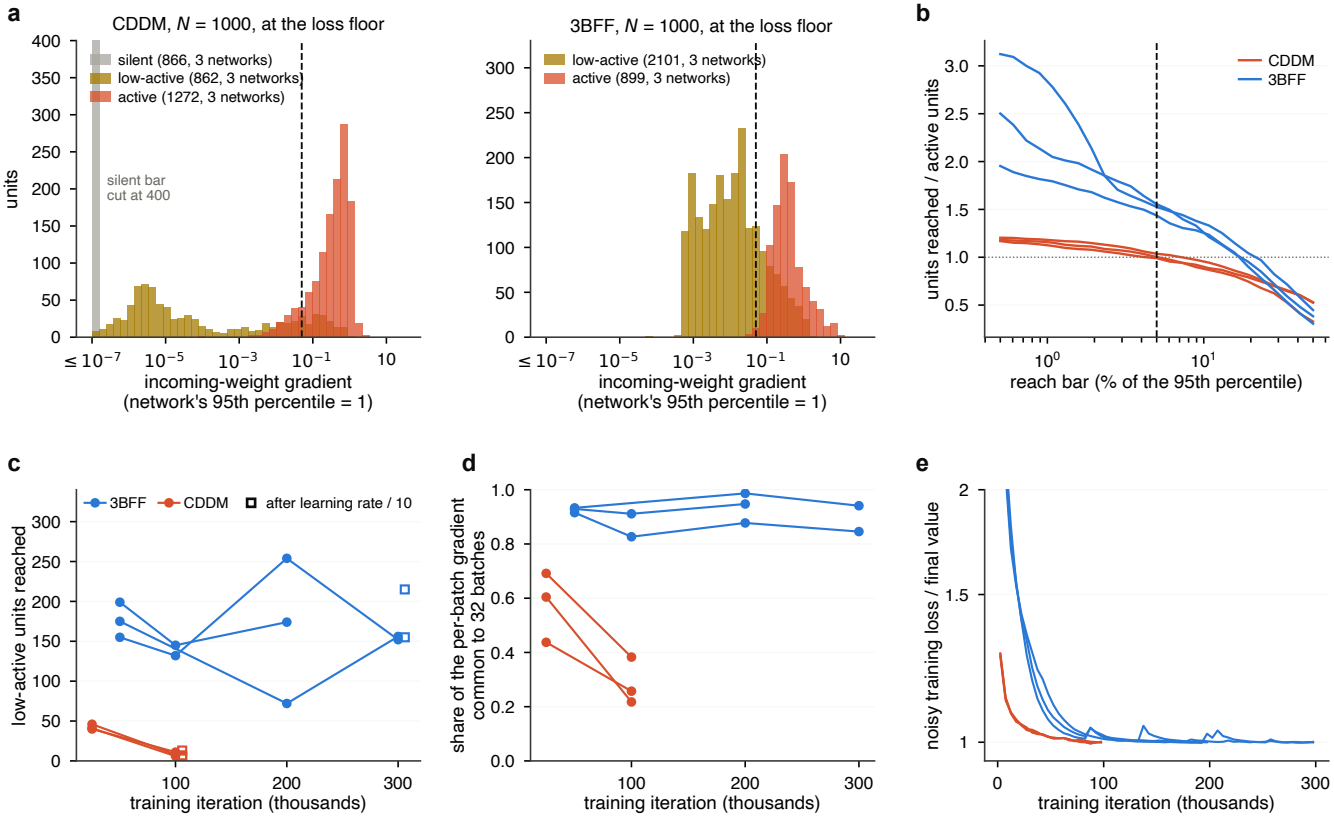
a
CDDM, N = 1000, at the loss floor
silent (866, 3 networks)
low-active (862, 3 networks)
active (1272, 3 networks)
silent bar
cut at 400
units
incoming-weight gradient
(network's 95th percentile = 1)
3BFF, N = 1000, at the loss floor
low-active (2101, 3 networks)
active (899, 3 networks)
incoming-weight gradient
(network's 95th percentile = 1)
b
CDDM
3BFF
units reached / active units
reach bar (% of the 95th percentile)
c
3BFF
CDDM
after learning rate / 10
low-active units reached
training iteration (thousands)
d
share of the per-batch gradient
common to 32 batches
training iteration (thousands)
e
noisy training loss / final value
training iteration (thousands)