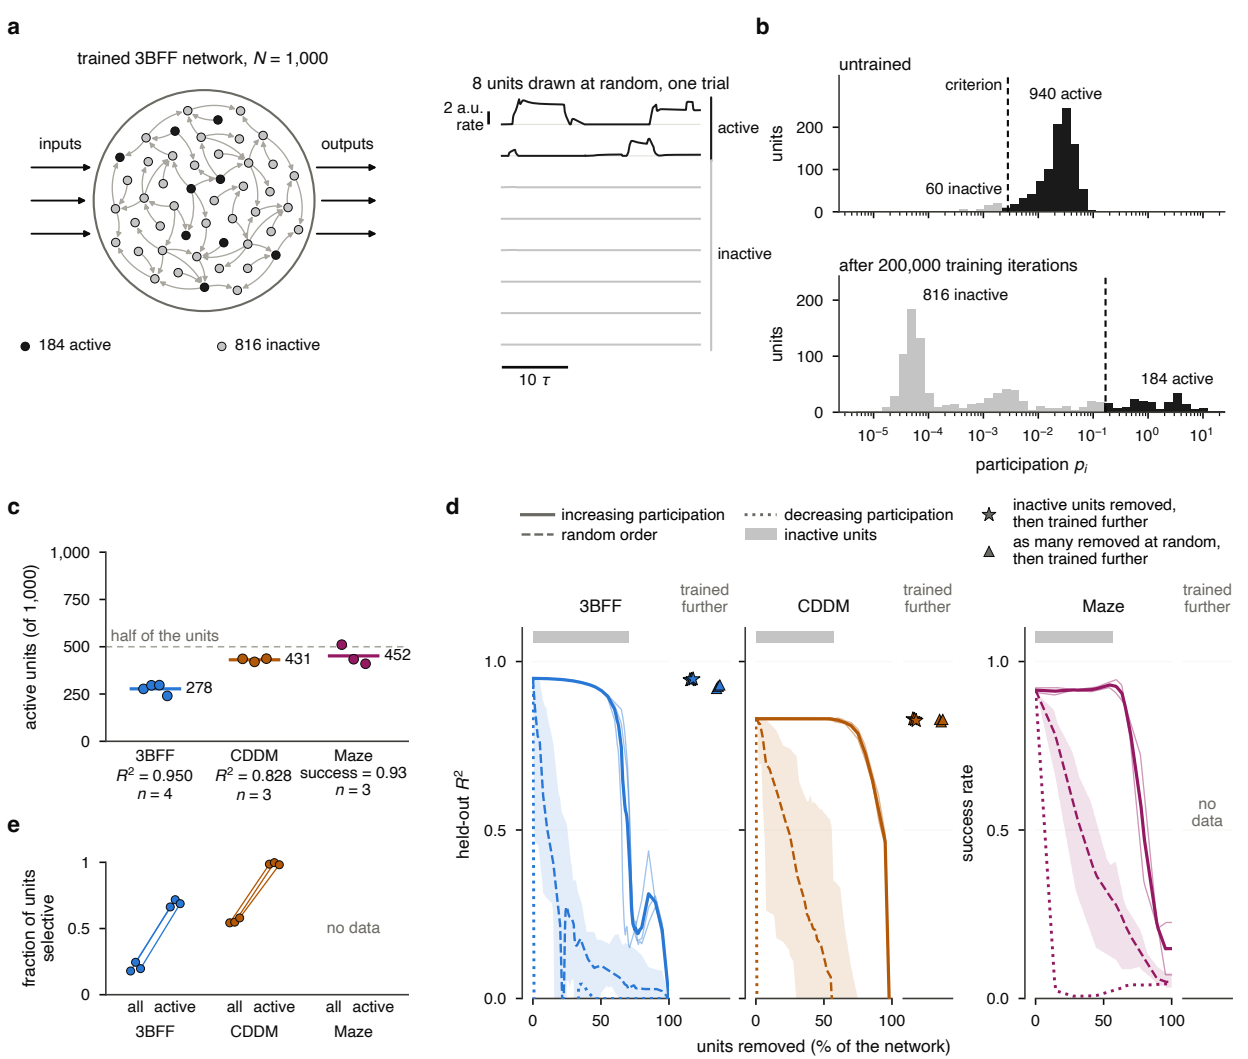

a
trained 3BFF network, N = 1,000
inputs
outputs
184 active
816 inactive
8 units drawn at random, one trial
2 a.u.
rate
active
inactive
10 τ
b
untrained
criterion
940 active
60 inactive
units
after 200,000 training iterations
816 inactive
184 active
participation $p_i$
c
active units (of 1,000)
half of the units
278
431
452
3BFF
$R^2$ = 0.950
n = 4
CDDM
$R^2$ = 0.828
n = 3
Maze
success = 0.93
n = 3
d
increasing participation
random order
decreasing participation
inactive units
inactive units removed, then trained further
as many removed at random, then trained further
3BFF
CDDM
Maze
trained further
held-out $R^2$
success rate
no data
units removed (% of the network)
e
fraction of units selective
all active
no data