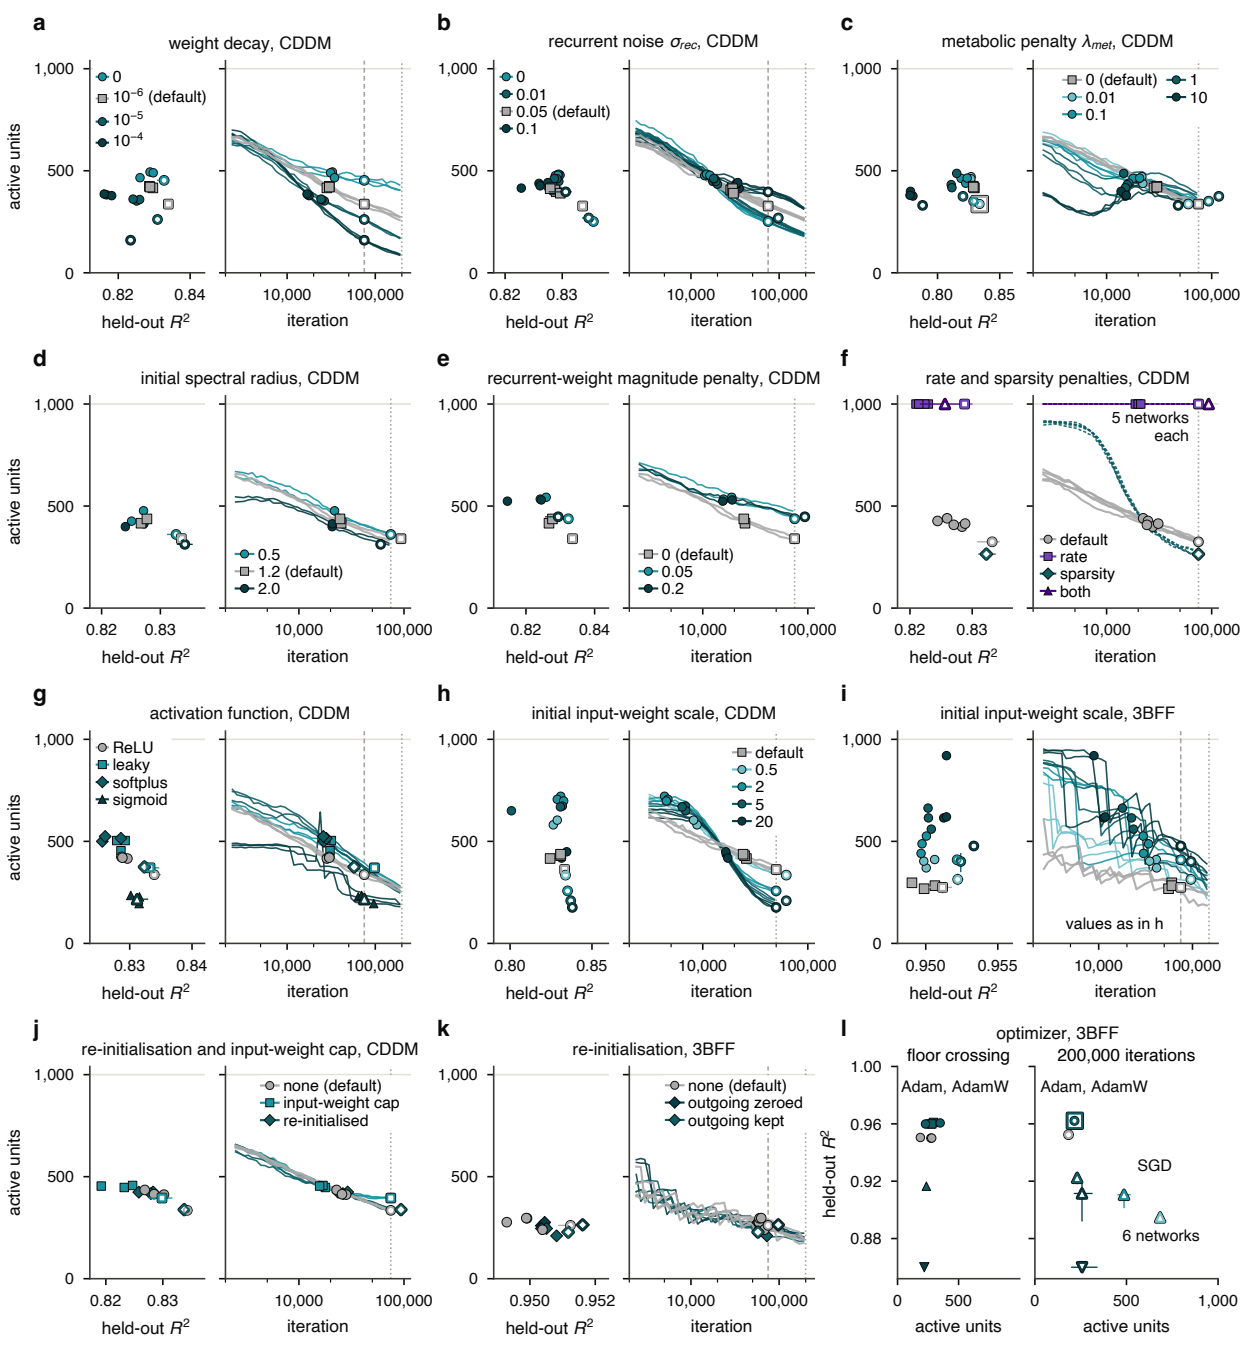

a
weight decay, CDDM
0
10^−6 (default)
10^−5
10^−4
active units
held-out R^2
iteration
b
recurrent noise σ_rec, CDDM
0
0.01
0.05 (default)
0.1
c
metabolic penalty λ_met, CDDM
0 (default)
0.01
0.1
1
10
d
initial spectral radius, CDDM
0.5
1.2 (default)
2.0
e
recurrent-weight magnitude penalty, CDDM
0 (default)
0.05
0.2
f
rate and sparsity penalties, CDDM
5 networks each
default
rate
sparsity
both
g
activation function, CDDM
ReLU
leaky
softplus
sigmoid
h
initial input-weight scale, CDDM
default
0.5
2
5
20
i
initial input-weight scale, 3BFF
values as in h
j
re-initialisation and input-weight cap, CDDM
none (default)
input-weight cap
re-initialised
k
re-initialisation, 3BFF
none (default)
outgoing zeroed
outgoing kept
l
optimizer, 3BFF
floor crossing
200,000 iterations
Adam, AdamW
SGD
6 networks
held-out R^2
active units