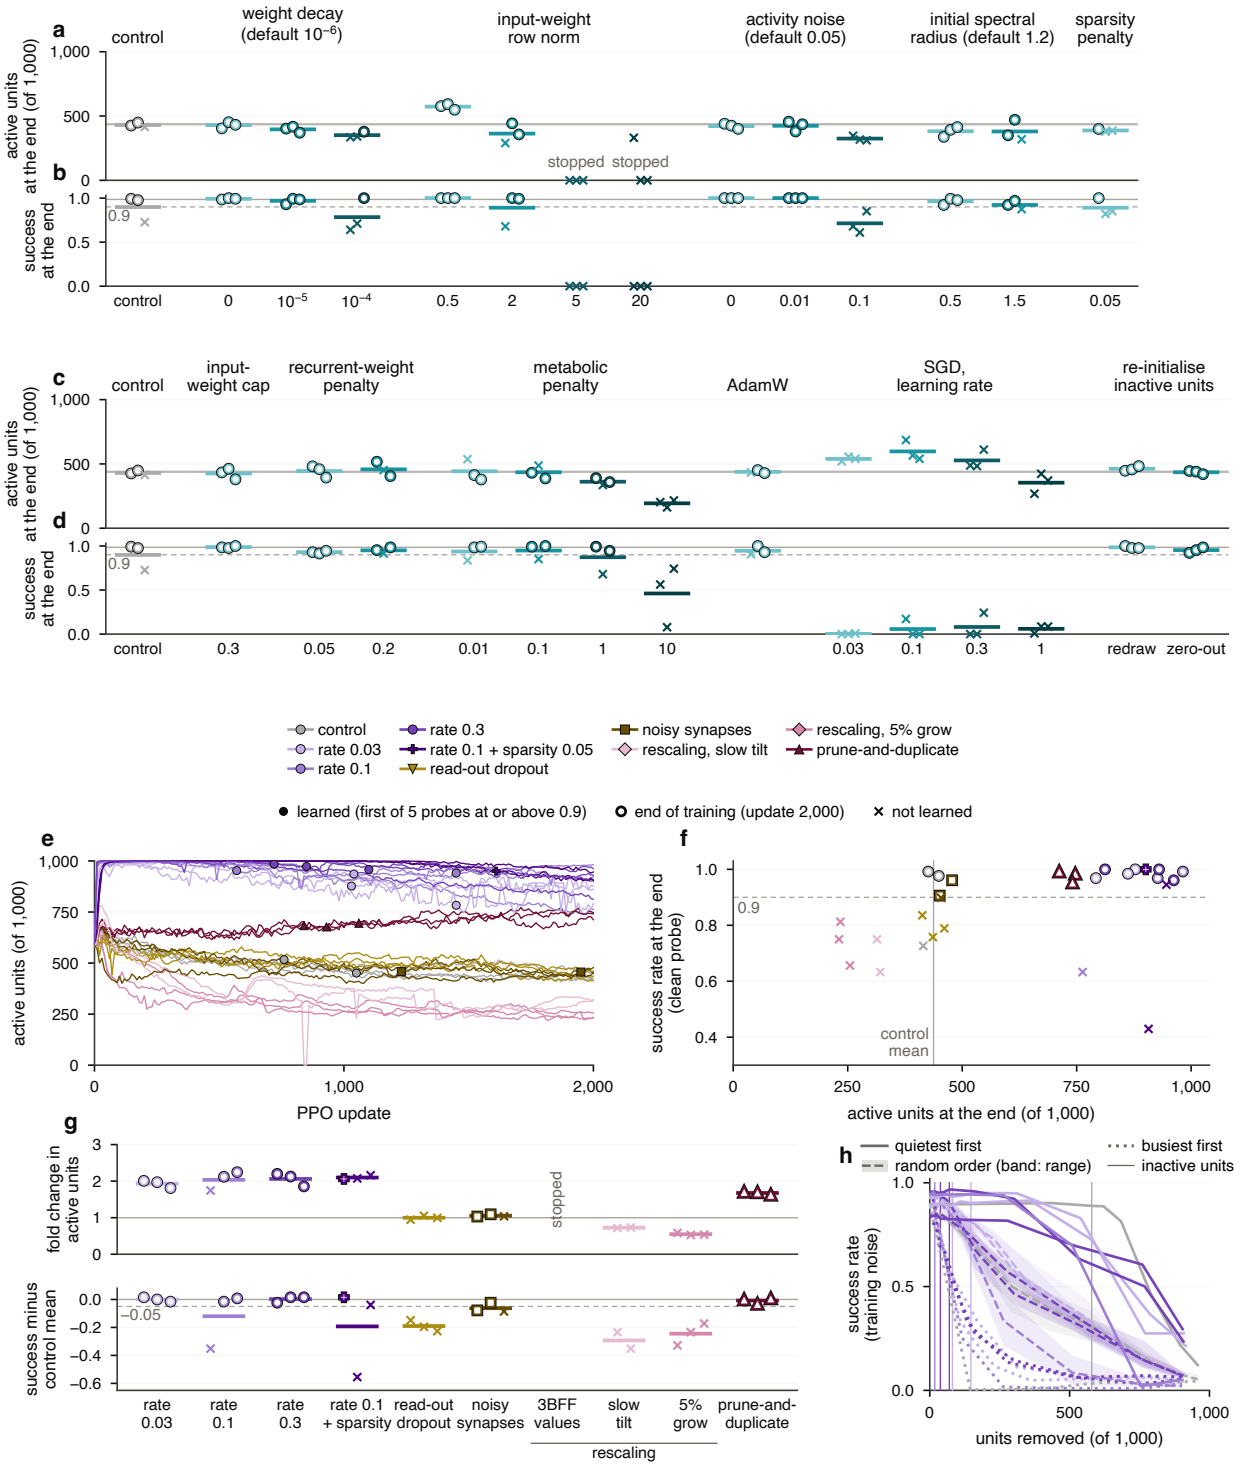

a
b
c
d
control
weight decay (default 10^{-6})
input-weight row norm
activity noise (default 0.05)
initial spectral radius (default 1.2)
sparsity penalty
input-weight cap
recurrent-weight penalty
metabolic penalty
AdamW
SGD, learning rate
re-initialise inactive units
active units at the end (of 1,000)
success at the end
stopped
0.9
control
0
10^{-5}
10^{-4}
0.5
2
5
20
0.01
0.1
1.5
0.05
0.3
0.03
1
redraw
zero-out
control
rate 0.3
noisy synapses
rescaling, 5% grow
rate 0.03
rate 0.1 + sparsity 0.05
rescaling, slow tilt
prune-and-duplicate
rate 0.1
read-out dropout
learned (first of 5 probes at or above 0.9)
end of training (update 2,000)
not learned
e
f
active units (of 1,000)
PPO update
success rate at the end (clean probe)
control mean
active units at the end (of 1,000)
g
h
fold change in active units
success minus control mean
−0.05
rate 0.03
rate 0.1
rate 0.3
rate 0.1 + sparsity
read-out dropout
noisy synapses
3BFF values
slow tilt
5% grow
prune-and-duplicate
rescaling
quietest first
random order (band: range)
busiest first
inactive units
success rate (training noise)
units removed (of 1,000)