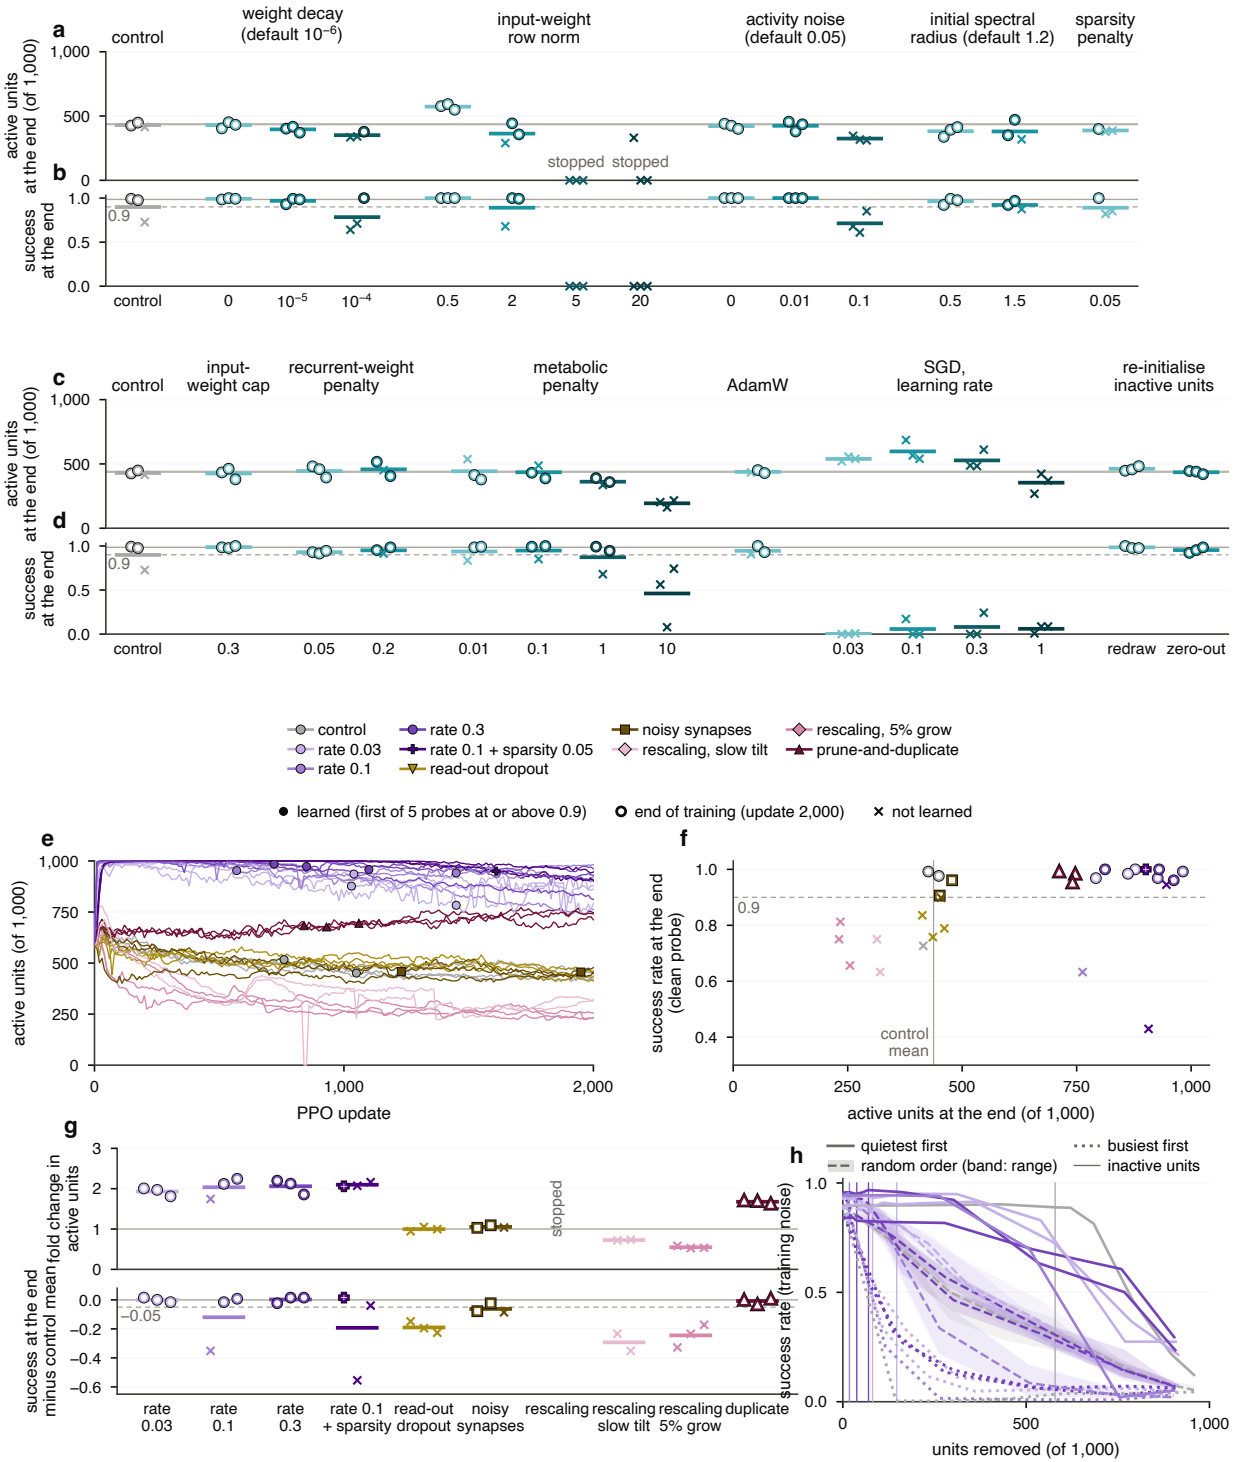

a
b
c
d
e
f
g
h
control
weight decay (default 10^{-6})
input-weight row norm
activity noise (default 0.05)
initial spectral radius (default 1.2)
sparsity penalty
input-weight cap
recurrent-weight penalty
metabolic penalty
AdamW
SGD, learning rate
re-initialise inactive units
active units at the end (of 1,000)
success at the end
stopped
0.9
control
0
10^{-5}
10^{-4}
0.5
2
5
20
0.01
0.1
1.5
0.05
0.3
0.03
1
redraw
zero-out
control
rate 0.3
noisy synapses
rescaling, 5% grow
rate 0.03
rate 0.1 + sparsity 0.05
rescaling, slow tilt
prune-and-duplicate
rate 0.1
read-out dropout
learned (first of 5 probes at or above 0.9)
end of training (update 2,000)
not learned
active units (of 1,000)
PPO update
success rate at the end (clean probe)
control mean
active units at the end (of 1,000)
fold change in active units
success at the end minus control mean
−0.05
rate 0.03
rate 0.1
rate 0.3
rate 0.1 + sparsity
read-out dropout
noisy synapses
rescaling slow tilt
rescaling 5% grow
duplicate
quietest first
busiest first
random order (band: range)
inactive units
success rate (training noise)
units removed (of 1,000)