# Anubis Orchid Neocloud playbook

Follow the manual or Copilot-assisted route to calculate workload GPU requirements, prepare a design handoff, obtain a plain-language explanation and save the completed engagement.

Reader key. **UI field** identifies a screen label. `Entered value` is literal content. **[Button]** identifies an action. ***Checked*** and ***blank*** identify settings.

## Customer scenario

A provider hosts twenty customers using text endpoints. Premium customers require dedicated resources. standard customers may share a pool. Both groups can peak together. Model choices vary between customers.

All added numbers are explicit fictional customer planning assumptions for a reproducible demonstration. They are not historical measurements or qualified hardware benchmarks. Dense text components use dense8b, one call/request, 2000 input and 500 output tokens unless overridden in the intake table. The 20 tenants are represented by two aggregate demand pools. Premium capacity is reserved. Tenant count is not multiplied into these already aggregated rates.

## Workflow input register

| ID | Scope and exact field | Value | Basis |
|---|---|---|---|
| I01 | Engagement<br>**Customer workload name** | `Orchid Neocloud manual playbook / Orchid Neocloud assisted playbook` | Entered |
| I02 | Engagement<br>**Factory users** | `Multiple tenants` | Selected |
| I03 | Engagement<br>**Do activities run at the same time?** | `Yes — overlapping demand` | Selected |
| I04 | Premium model endpoints<br>**Component name** | `Premium model endpoints` | Selected |
| I05 | Premium model endpoints<br>**Application pattern** | `direct` | Selected |
| I06 | Premium model endpoints<br>**Compute location** | `In this factory` | Selected |
| I07 | Premium model endpoints<br>**Relationship** | `Independent` | Selected |

| ID | Scope and exact field | Value | Basis |
|---|---|---|---|
| I08 | Premium model endpoints<br>**Model preset** | dense8b | Explicit planning assumption |
| I09 | Premium model endpoints<br>**Peak requests per minute** | 60 | Explicit planning assumption |
| I10 | Premium model endpoints<br>**Model calls per request or job** | 1 | Explicit planning assumption |
| I11 | Premium model endpoints<br>**Input tokens per model call** | 2000 | Explicit planning assumption |
| I12 | Premium model endpoints<br>**Output tokens per model call** | 500 | Explicit planning assumption |
| I13 | Premium model endpoints<br>**Reserve dedicated capacity** | Checked | Selected |
| I14 | Standard model endpoints<br>**Component name** | Standard model endpoints | Selected |
| I15 | Standard model endpoints<br>**Application pattern** | direct | Selected |
| I16 | Standard model endpoints<br>**Compute location** | In this factory | Selected |
| I17 | Standard model endpoints<br>**Relationship** | Independent | Selected |
| I18 | Standard model endpoints<br>**Model preset** | dense8b | Explicit planning assumption |
| I19 | Standard model endpoints<br>**Peak requests per minute** | 300 | Explicit planning assumption |
| I20 | Standard model endpoints<br>**Model calls per request or job** | 1 | Explicit planning assumption |
| I21 | Standard model endpoints<br>**Input tokens per model call** | 2000 | Explicit planning assumption |
| I22 | Standard model endpoints<br>**Output tokens per model call** | 500 | Explicit planning assumption |
| I23 | Shared<br>**Infrastructure deployment profile** | HGX B300 · Spectrum-X · Enterprise reference design with two network planes | Default or explicitly left blank |

| ID | Scope and exact field | Value | Basis |
|---|---|---|---|
| I24 | Shared<br>**Sensitivity envelope** | ±30% | Default or explicitly left blank |
| I25 | Shared<br>**Use these planning assumptions** | Checked | Default or explicitly left blank |
| I26 | Shared<br>**Locally retained data in TB / Daily growth in GB** | Blank | Default or explicitly left blank |
| I27 | Shared<br>**Initial dataset to load in TB / Initial loading window in hours** | Blank | Default or explicitly left blank |
| I28 | Shared<br>**Ongoing incoming / outgoing data in GB per day** | Blank | Default or explicitly left blank |
| I29 | Shared<br>**Aggregate storage reads / writes in Gbps** | Blank | Default or explicitly left blank |
| I30 | Shared<br>**East-west payload per GPU in Gbps / Customer datacenter round-trip target in ms** | Blank | Default or explicitly left blank |
| I31 | Shared<br>**Usable link fraction / Initial loading overlap** | 0.7 / Yes | Default or explicitly left blank |
| I32 | Shared<br>**Explanation connection** | Manual: deterministic. Assisted: tested DeepSeek connection | Default or explicitly left blank |
| I33 | Shared<br>**This saved result is public or fictional and may be sent to the selected provider** | Checked only for this fictional assisted example | Default or explicitly left blank |

Remaining displayed engine defaults: BF16 weights and KV cache, context 8192 tokens, 32 concurrent sequences, 8 GB workspace, compute efficiency 0.35 and memory efficiency 0.50. Host provisions are 256 GB RAM, 3840 GB local disk and 16 CPU cores per workload GPU. The blank growth horizon uses 365 days. Reference sizing does not use text-token equations.

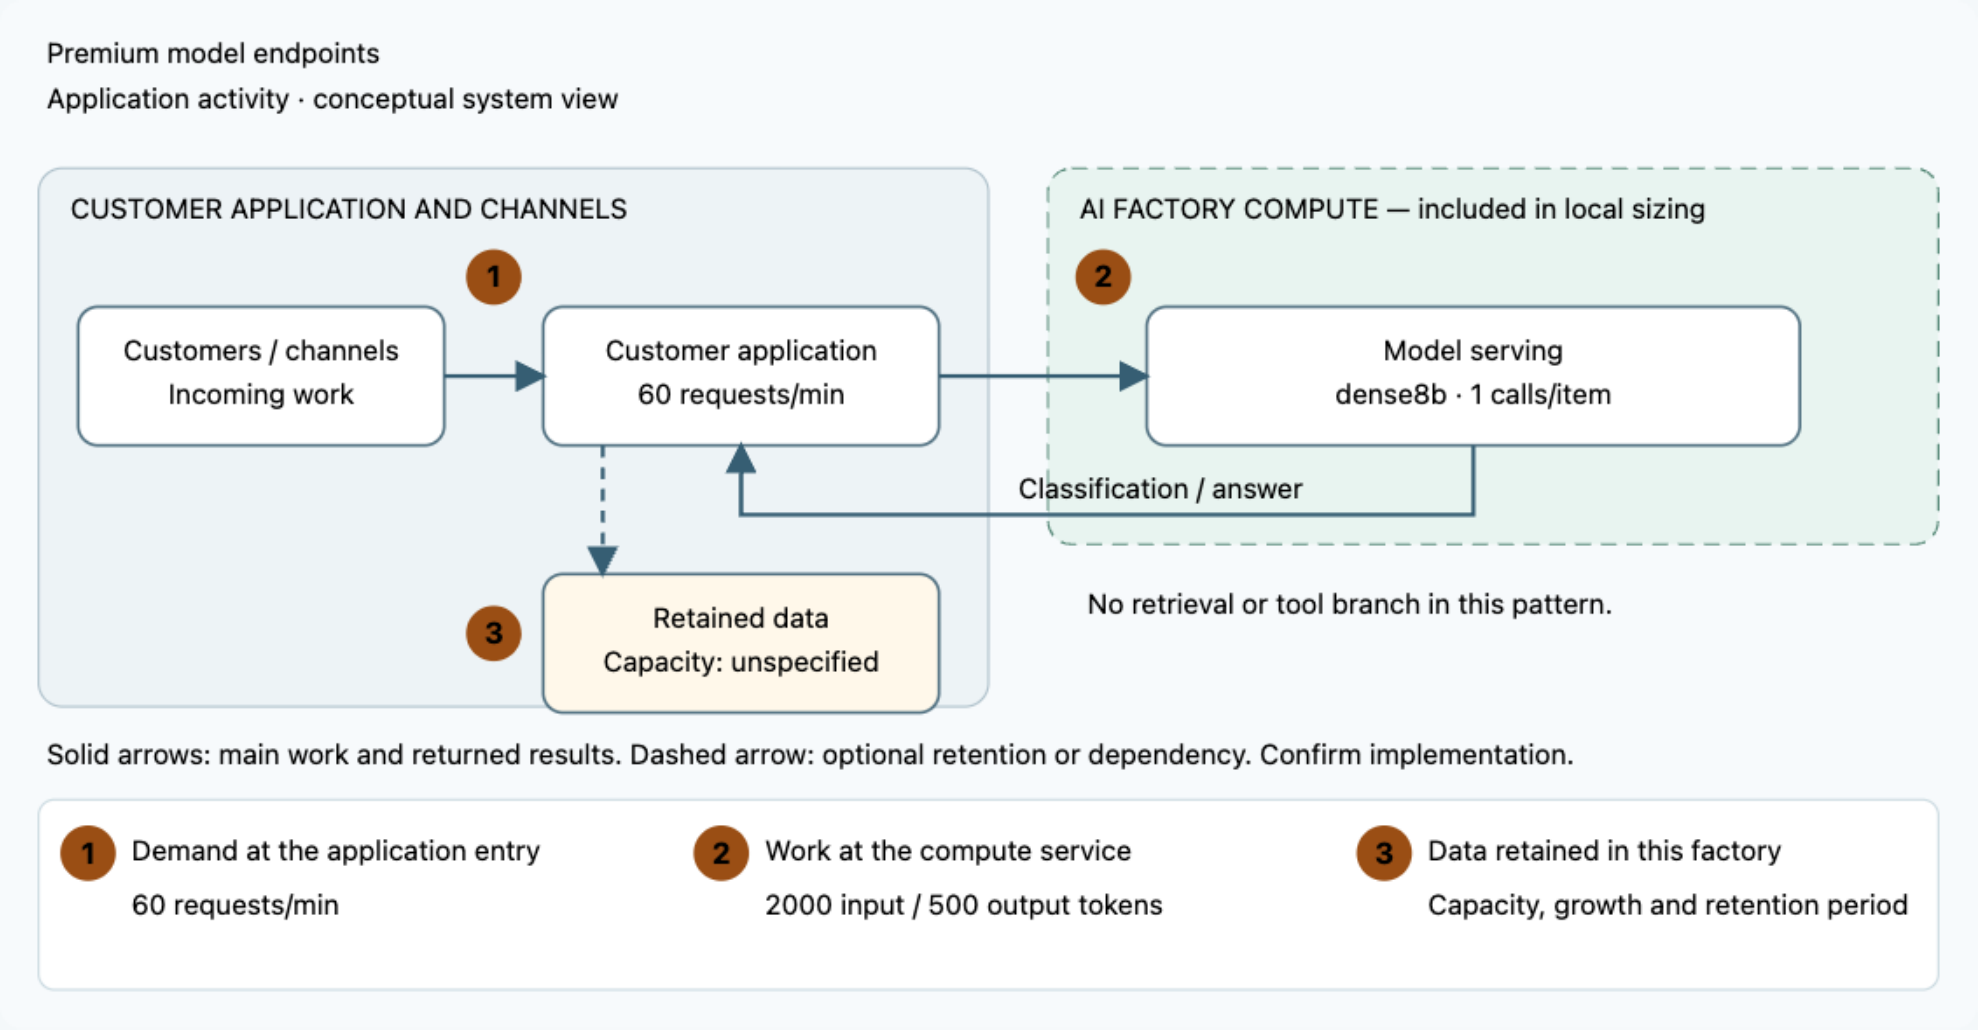
## Expected result and process

| B300 workload GPUs | B200 workload GPUs | H200 workload GPUs | Selected B300 factory anchor |
|---|---|---|---|
| 16 | 16 | 16 | 256 |

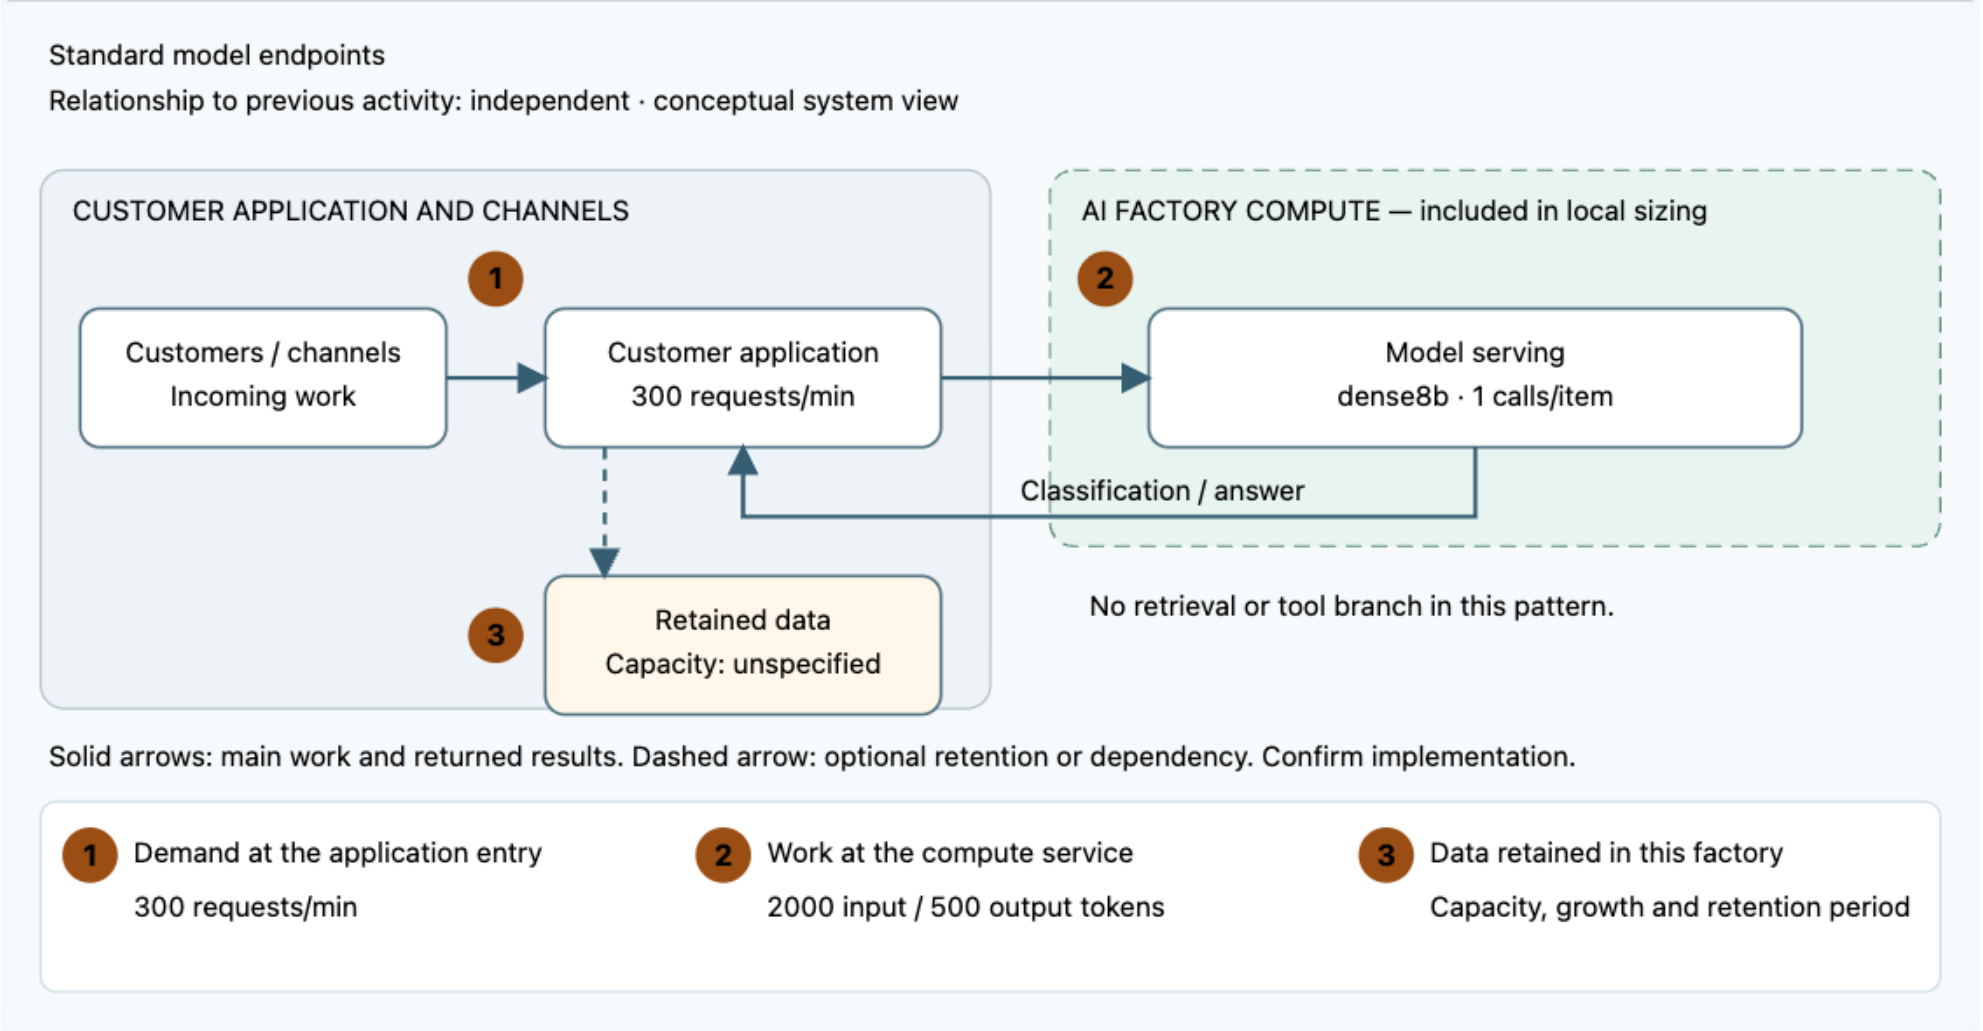
Describe the application → confirm its boundary → enter demand and assumptions → calculate GPU comparisons → prepare design handoff → explain the saved result → complete and retrieve the engagement.

The workload count and factory anchor are separate. Spare compute may support additional work, but it does not establish a qualified tenant count. Outstanding network and shared-storage measurements remain visible in the companion requirements.

# Premium model endpoints architecture



# Standard model endpoints architecture



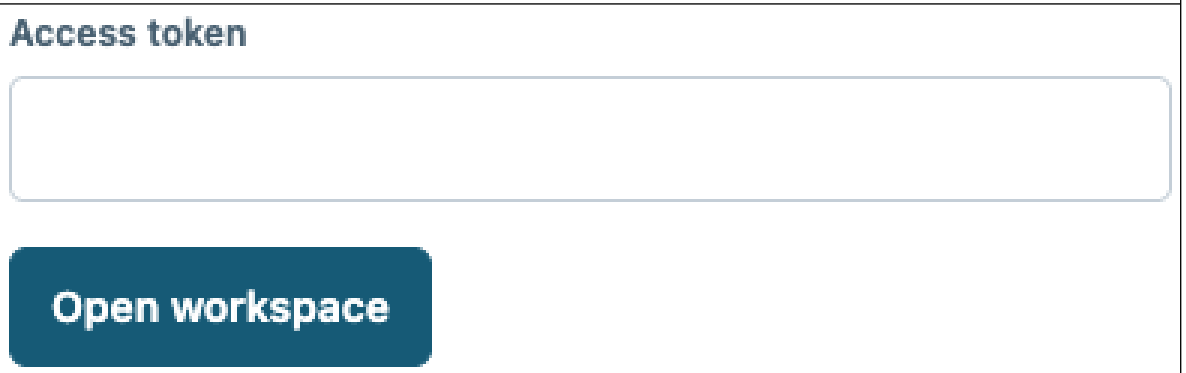

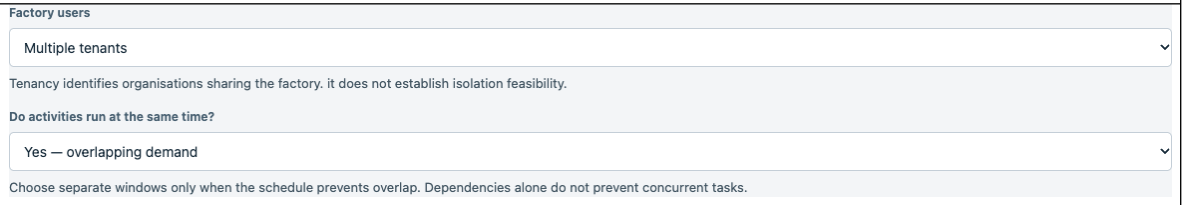
## Start and access the workspace

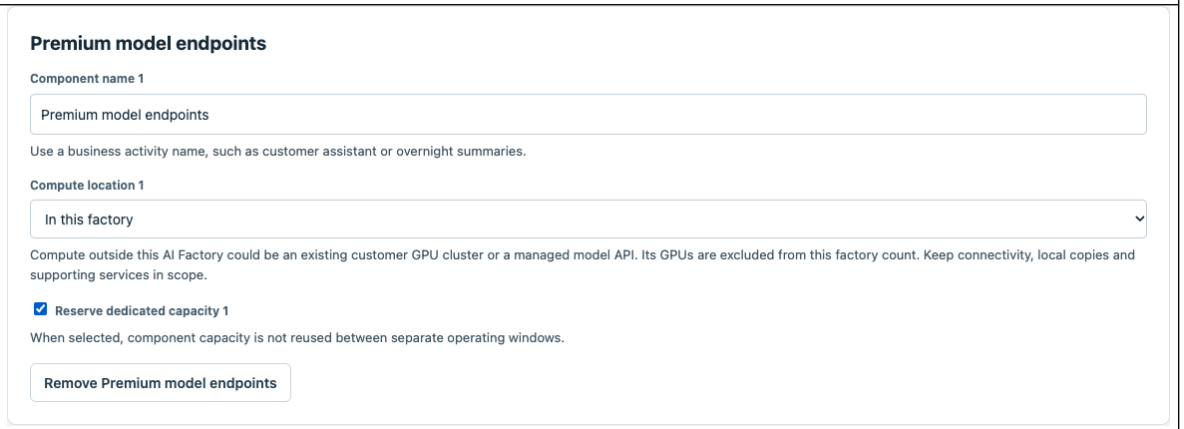
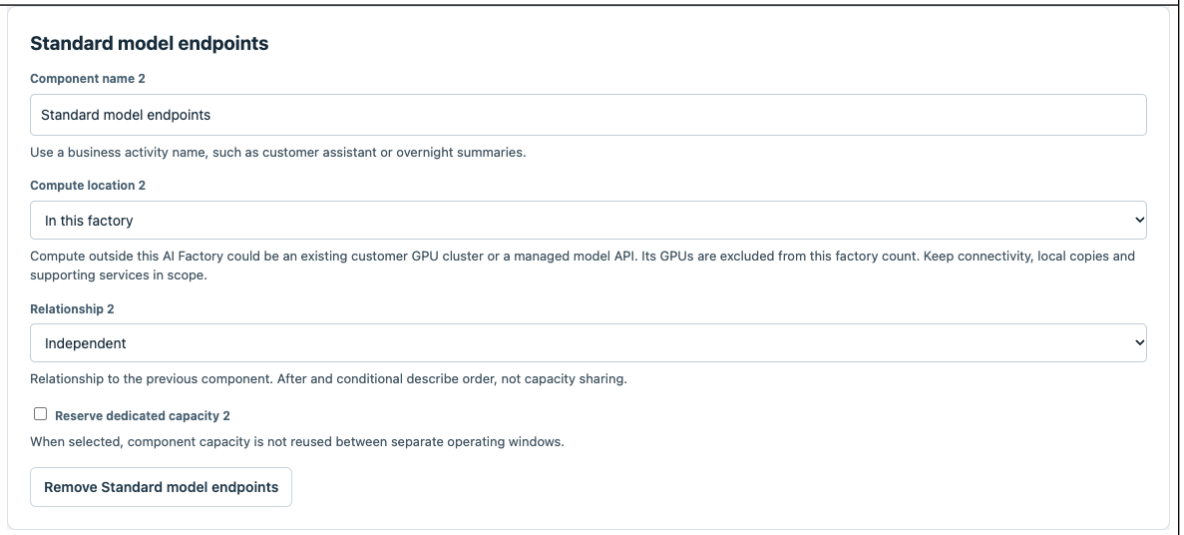
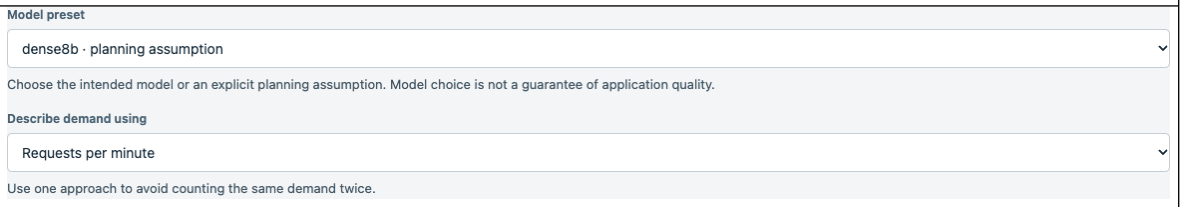
Complete the Mac installation guide in `docs/macos-installation-guide.txt`. From the repository folder run `python3 deploy/local/run.py`. Keep the terminal open. On first launch the application creates `.anubis/identities.json`. Open that private file locally, copy your identity token without quotation marks, and paste it into **Access token**. Click **[Open workspace]**. Saved cases persist in `.anubis/anubis.sqlite` across restarts. Preserve this directory and use the documented backup process.

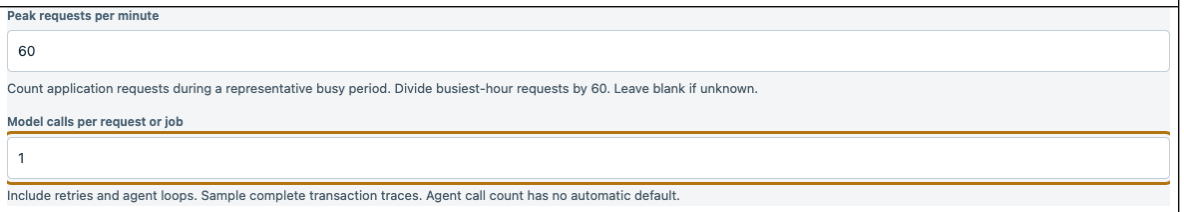
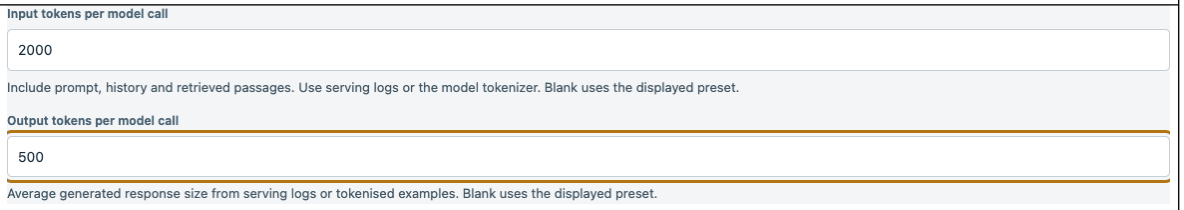
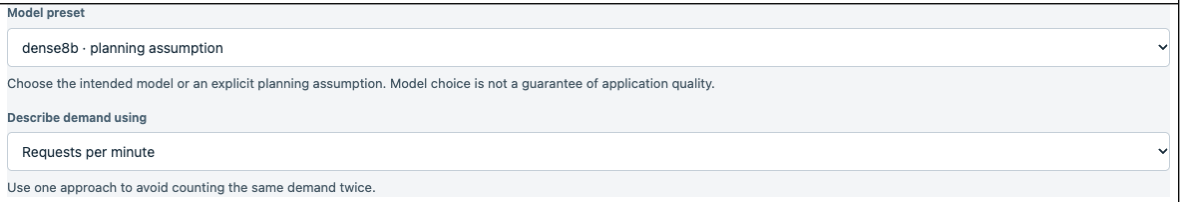
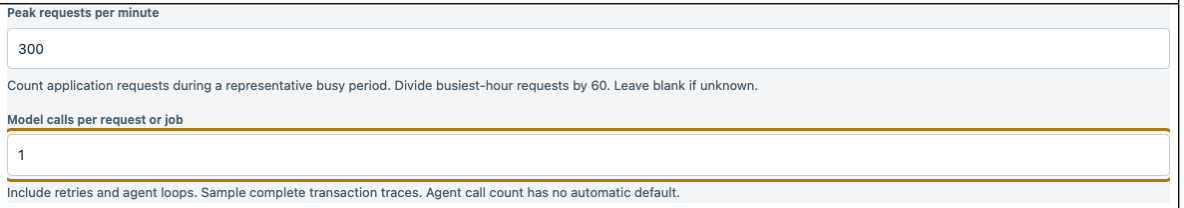
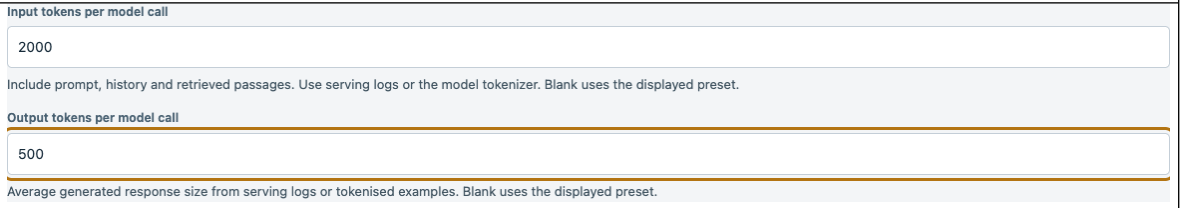
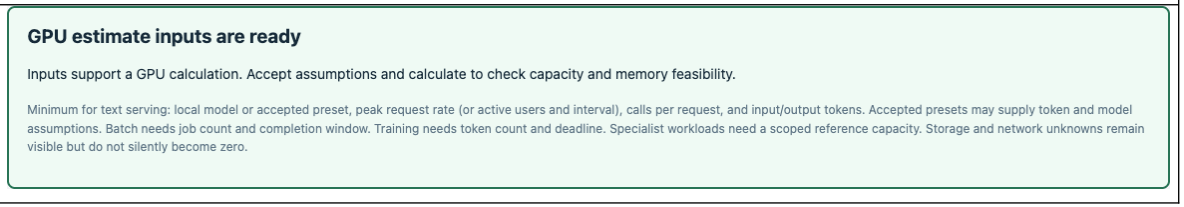
For Copilot, put the provider API key in the protected backend configuration, never in the chat or input register. Open **[AI connections]**, configure the approved provider and backend environment-variable name, and test the connection. The recorded assisted walkthrough uses DeepSeek deepseek-flash with low reasoning. Connection testing is separate from workload and explanation validation.

# Manual workflow

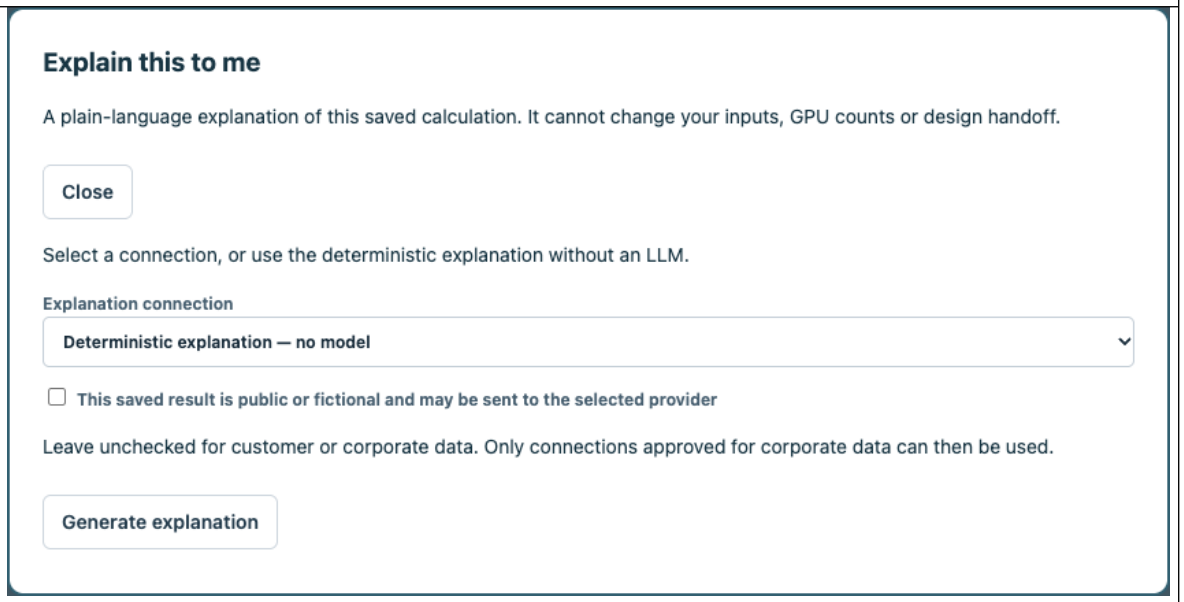
Follow these numbered steps in order. Use a separate engagement name for this route. Input values are the same workload assumptions in both routes. In the assisted route, inspect extracted facts and explicitly enter any specialist reference values in the guided form.

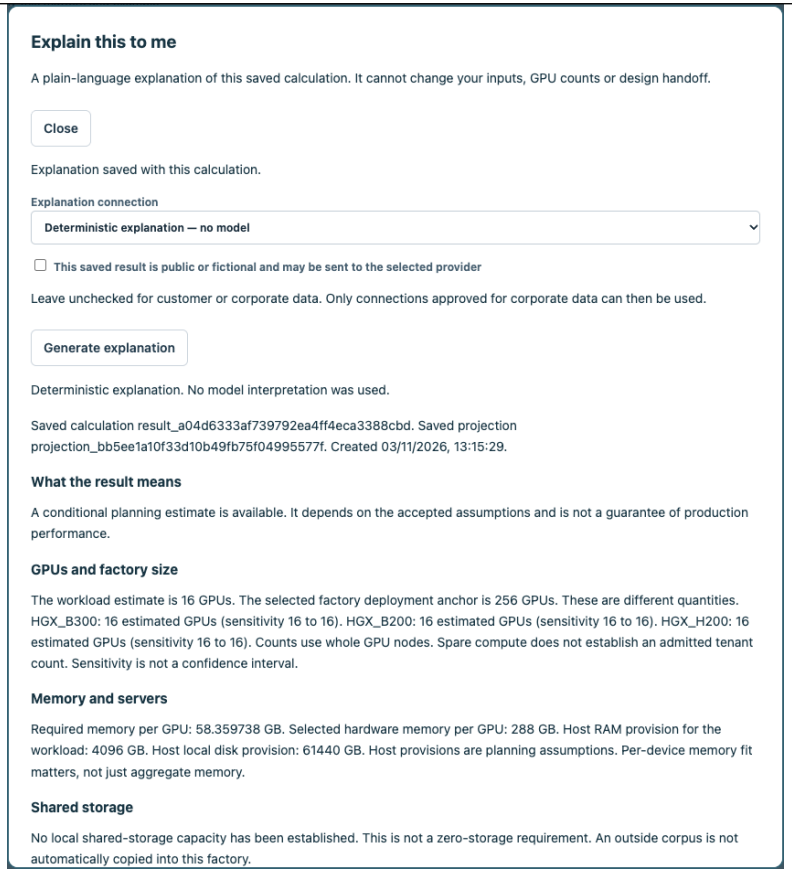
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 1 | Start Anubis and open the local address. Retrieve your private token from `.anubis/identities.json`. Paste it into **Access token** and click **[Open workspace]**. Never share the token. |  |
| 2 | Click **[New engagement]**. Set **Customer workload name** = `Orchid Neocloud manual playbook`. Click **[Add Direct model service]**. Click **[Add Direct model service]**. Click **[Continue]**. |  |
| 3 | Set **Factory users** = `Multiple tenants`. Set **Do activities run at the same time?** = `Yes — overlapping demand`. |  |

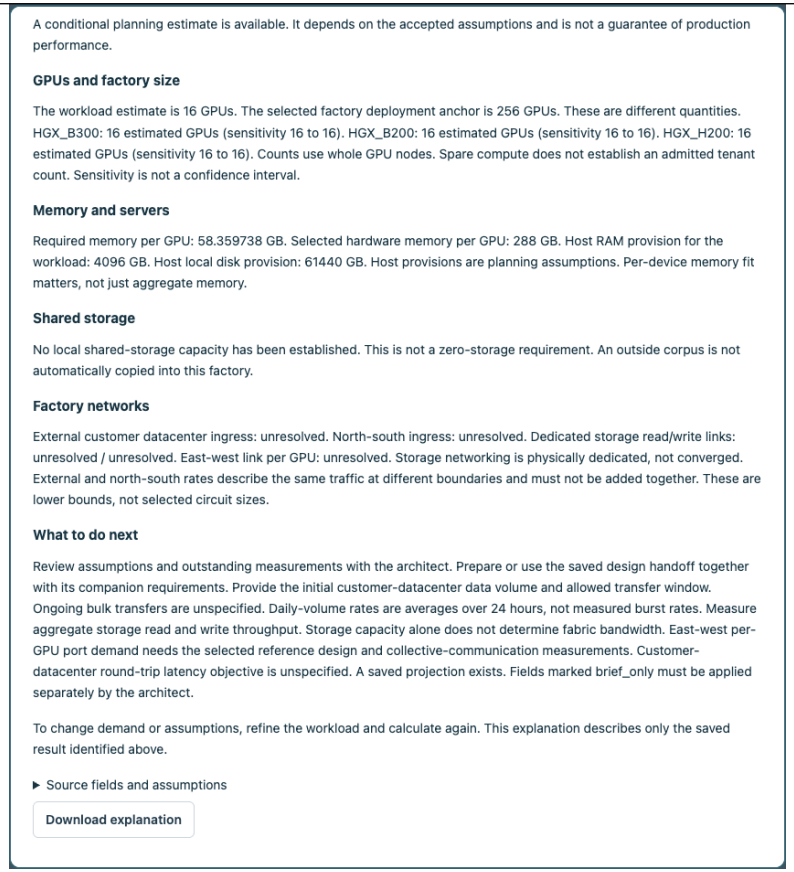
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 4 | Set **Component name 1** = `Premium model endpoints`. Set **Compute location 1** = `In this factory`. Set **Reserve dedicated capacity 1** ***checked***. |  |
| 5 | Set **Component name 2** = `Standard model endpoints`. Set **Compute location 2** = `In this factory`. Set **Reserve dedicated capacity 2** ***unchecked***. Set **Relationship 2** = `Independent`. |  |
| 6 | Set **Model preset** = `dense8b`. Set **Describe demand using** = `Requests per minute`. |  |

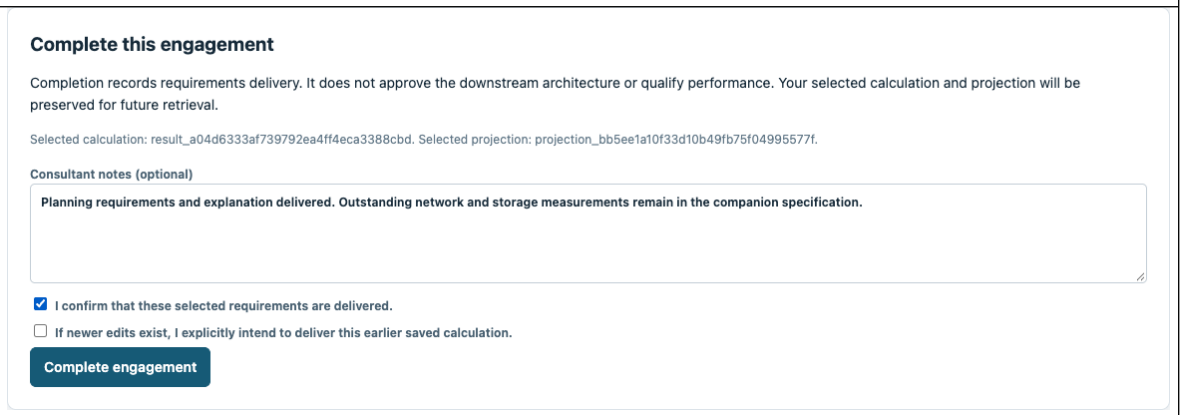
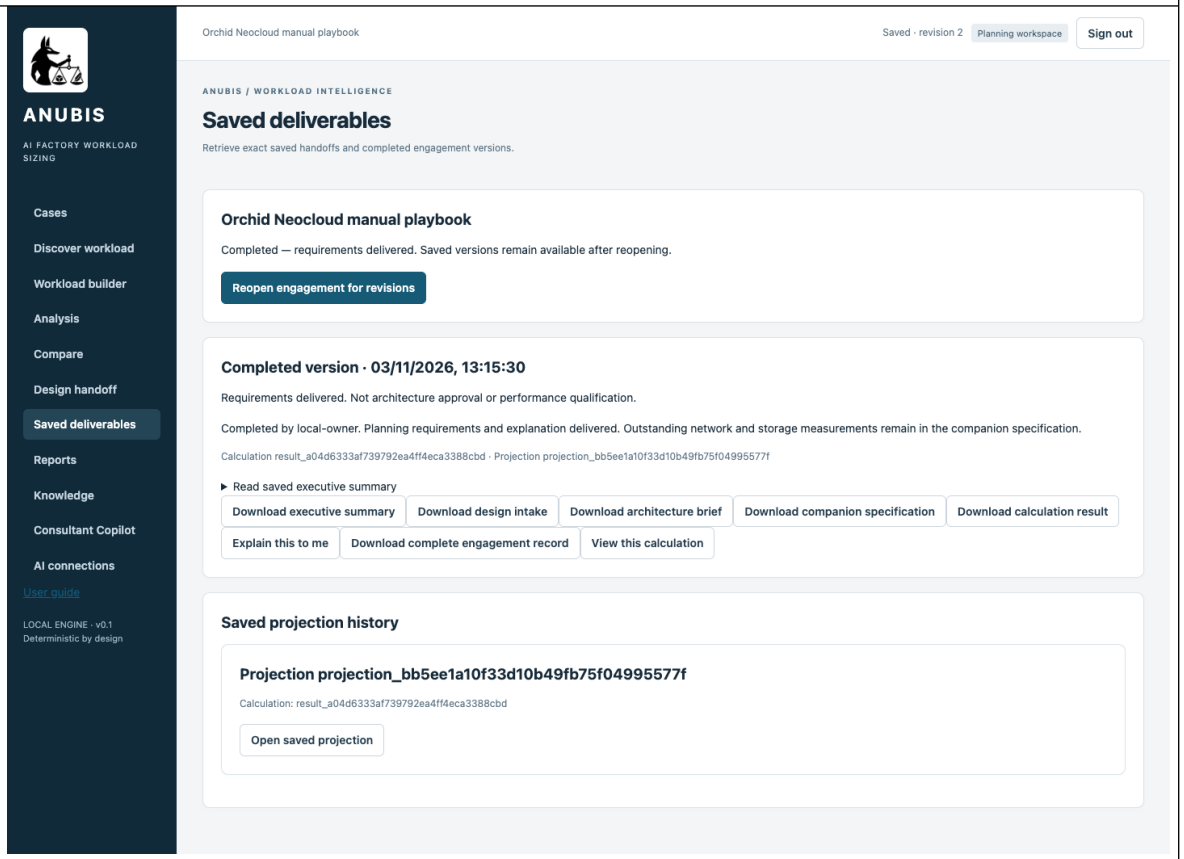
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 7 | Set **Peak requests per minute** = `60`. Set **Model calls per request or job** = `1`. |  |
| 8 | Set **Input tokens per model call** = `2000`. Set **Output tokens per model call** = `500`. |  |
| 9 | Set **Model preset** = `dense8b`. Set **Describe demand using** = `Requests per minute`. |  |
| 10 | Set **Peak requests per minute** = `300`. Set **Model calls per request or job** = `1`. |  |
| 11 | Set **Input tokens per model call** = `2000`. Set **Output tokens per model call** = `500`. |  |
| 12 | Confirm **[GPU estimate inputs are ready]**. Retain the displayed B300 enterprise deployment profile and **Sensitivity envelope** = `±30%`. Check **Use these planning assumptions**. Click **[Calculate estimate]**. |  |

| Step | Activity and exact values | Screen reference |
|---|---|---|
| 13 | Read the GPU workload comparison. Expected B300 = 16, B200 = 16, H200 = 16 GPUs. These workload counts are separate from the 256 GPU factory deployment anchor. Click **[Export result]** to save the calculation. | **GPU workload comparison**<br>Same workload and assumptions on each GPU. Counts include whole 8-GPU nodes and declared failure reserves. These are workload estimates. deployment anchors and downstream design tool platform support are separate.<br>GPU / ESTIMATED GPUS / SENSITIVITY RANGE / VRAM REQUIRED / AVAILABLE / STATUS<br>HGX_B300 / 16 / 16–16 / 58.359738 / 288 GB / conditional<br>HGX_B200 / 16 / 16–16 / 58.359738 / 180 GB / conditional<br>HGX_H200 / 16 / 16–16 / 58.359738 / 141 GB / conditional<br>Download GPU comparison |
| 14 | Click **[Continue to Design handoff]**, then **[Prepare projection]**. Read the executive summary and download the design intake and companion specification. Unresolved network and storage measurements remain explicit. | **AI Factory design executive summary**<br>Explain this to me<br>What this projection means for your design. Generated from saved calculation and mapping fields using fixed narrative rules.<br>• **Decision status:** This is a conditional planning estimate. It uses analytical assumptions rather than measured deployment performance. The projection is partial and its selection is experimental. This projection does not establish live target qualification.<br>▶ Source fields<br>• **Workload compute:** The workload estimate is 16 HGX B300 GPUs, rounded to the supported node size. The sensitivity envelope is 16–16 GPUs for the selected ±30% sensitivity setting. This is not a statistical confidence interval.<br>▶ Source fields<br>• **Factory design size:** The selected reference-design configuration contains 256 GPUs across 32 nodes or trays. This is larger than the workload estimate because of the selected architecture sizing anchor. It does not mean this workload alone requires the entire factory. This profile selection alone does not certify reference-architecture compliance.<br>▶ Source fields<br>• **Capacity for growth:** The selected platform has estimated GPU capacity for 16 simultaneous copies of the same workload profile, including 15 additional copies beyond the first. This is compute capacity only. Storage, host resources, networks and isolation must be checked before admitting additional workloads. It is not a validated tenant limit.<br>▶ Source fields<br>• **GPU alternatives:** HGX B300: 16 GPUs (conditional). HGX B200: 16 GPUs (conditional). HGX H200: 16 GPUs (conditional). These are workload comparisons. Equal node-rounded counts do not imply equal performance, cost or downstream platform support.<br>▶ Source fields<br>• **Memory and server provision:** Estimated GPU memory requirement: 58.36 GB per GPU. Selected hardware provides 288 GB per GPU. Host RAM provision for the workload: 4,096 GB. Local disk provision for the workload: 61,440 GB. The server template assumes 128 CPU cores per node. Host and disk provisions require deployment validation. They are not shared-storage capacity.<br>▶ Source fields<br>• **Shared storage:** No shared-storage tier requirement is established here. This does not mean that the workload needs no storage, or that an existing external corpus must be copied into this factory.<br>▶ Source fields<br>• **GPU interconnect:** The selected east–west fabric is Spectrum-X. Per-GPU link demand is not established. Selecting a fabric does not establish its required bandwidth or guarantee latency.<br>▶ Source fields<br>• **Customer and north–south connectivity:** Customer-datacenter steady traffic lower bounds are 659 kbit/s inbound and 164 kbit/s outbound. Total external ingress requirement: not established. North–south ingress requirement: not established. Initial data-loading capacity remains unresolved. The customer-link latency objective is unspecified. These traffic lower bounds are not recommended circuit sizes. External and north–south boundaries carry the same declared traffic and must not be added together.<br>▶ Source fields<br>• **Storage network:** Use a physically dedicated storage network, separate from the other fabrics. Converged networking is excluded. Technology: Ethernet. Read and write link lower bounds are not established and not established. Missing throughput measurements are not zero.<br>▶ Source fields<br>• **Tenancy:** The workload is framed for multiple tenants. Isolation and the admitted tenant count still require architectural validation.<br>▶ Source fields<br>• **Downstream design handoff:** The intake requests 256 GPUs on HGX B300, with Spectrum-X networking and Ethernet storage-fabric technology. This is a partial transfer. The architect must also use the companion specification. Physical compute, node and NIC details require external reconciliation even where the platform name maps directly.<br>▶ Source fields<br>• **Architect actions:** Apply the brief-only requirements manually. These include the fields identified in the mapping ledger and are not automatically transferred by sending the intake JSON. Resolve outstanding network measurements and reconcile host, storage, physical compute and failure-domain design before final approval.<br>▶ Source fields<br>Download executive summary Narrative rules: projection-narrative-1.1 |

| Step | Activity and exact values | Screen reference |
|---|---|---|
| 15 | Click **[Explain this to me]**. Set **Explanation connection** = `Deterministic explanation — no model`. Click **[Generate explanation]**. The saved calculation cannot be changed by this action. |  |

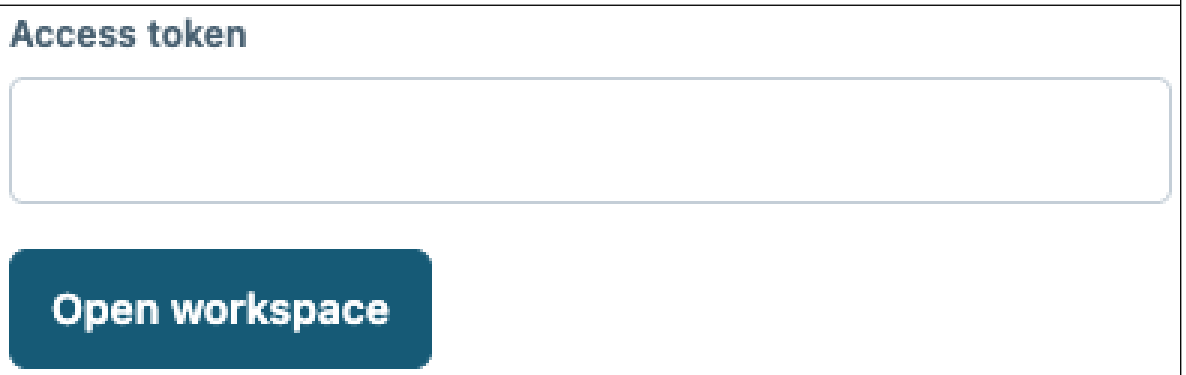
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 16 | Read the explanation of the workload GPUs, deployment anchor, memory, storage and all network roles. Expand **[Source fields and assumptions]** to trace the explanation. Click **[Download explanation]**, then **[Close]**. |  |

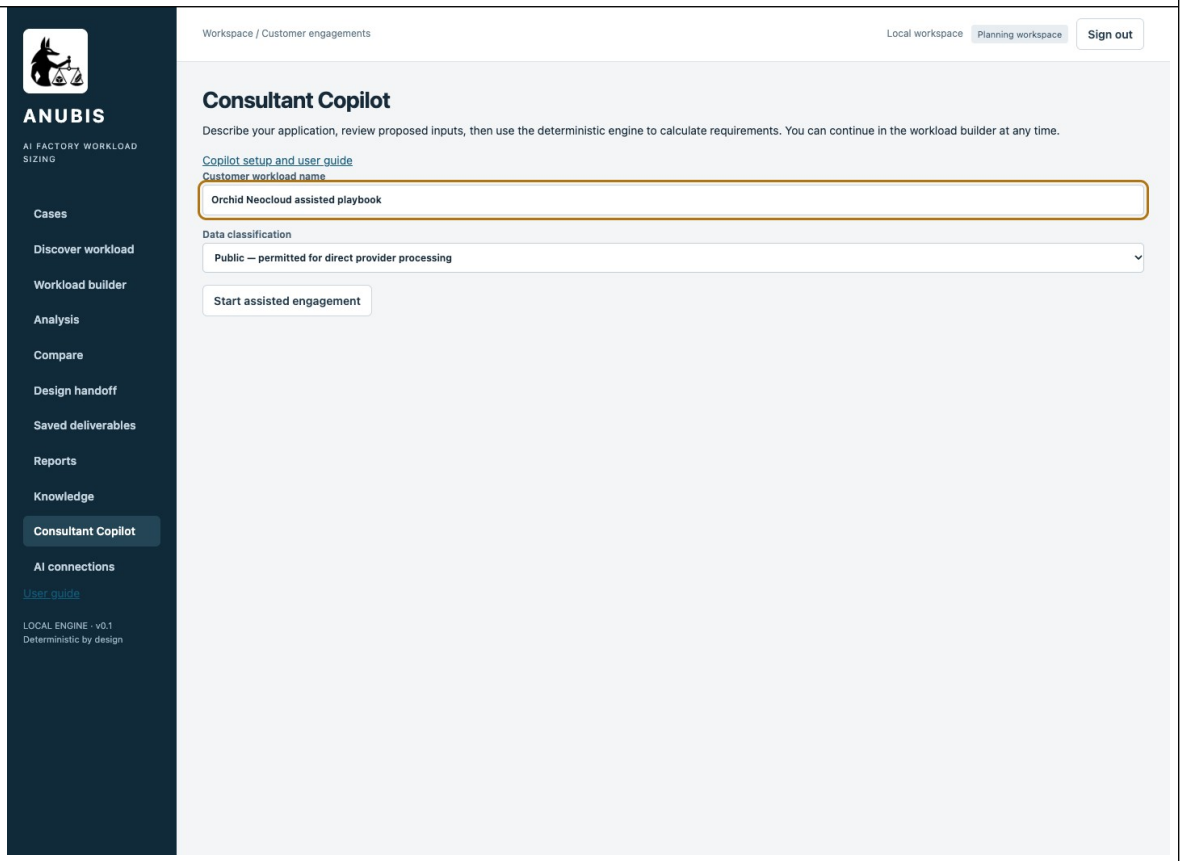
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 17 | Scroll down within **[Explain this to me]** to read **[Factory networks]** and **[What to do next]**. Expand **[Source fields and assumptions]** if needed. Click **[Download explanation]** to save the text. Scroll to the top and click **[Close]** to continue. |  |

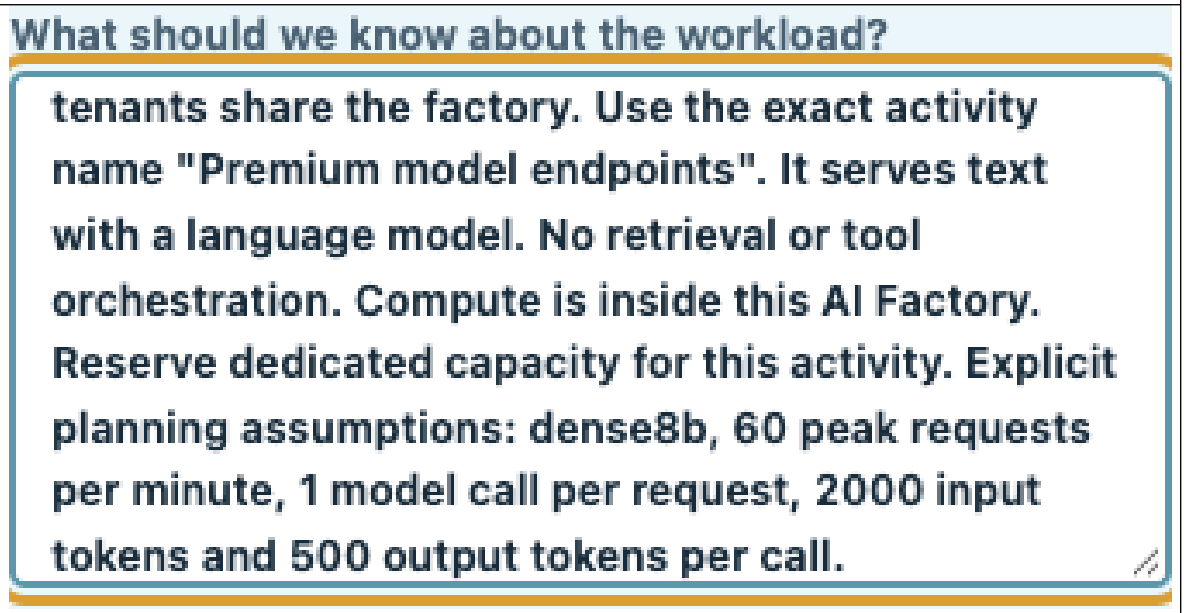
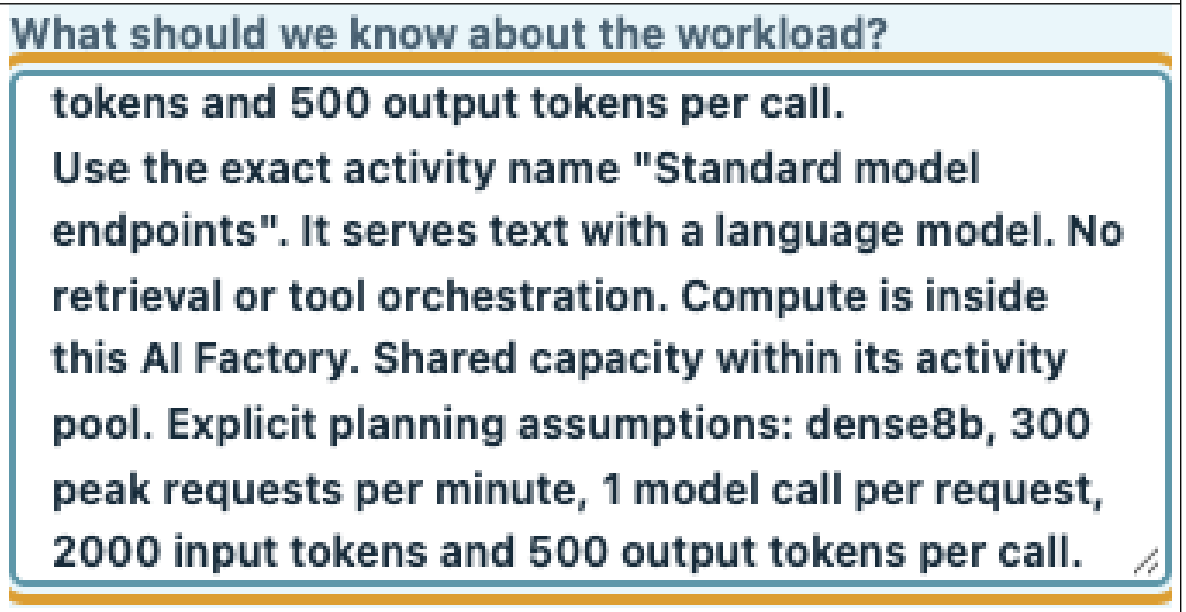
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 18 | Set **Completion notes** = `Planning requirements and explanation delivered. Outstanding network and storage measurements remain in the companion specification.`. Check **I confirm that these selected requirements are delivered.**. Click **[Complete engagement]**. |  |
| 19 | The engagement is complete. Its exact calculation, handoff and explanation remain saved. Use **[Cases]** to reopen the engagement and **[Saved deliverables]** to retrieve its documents. |  |

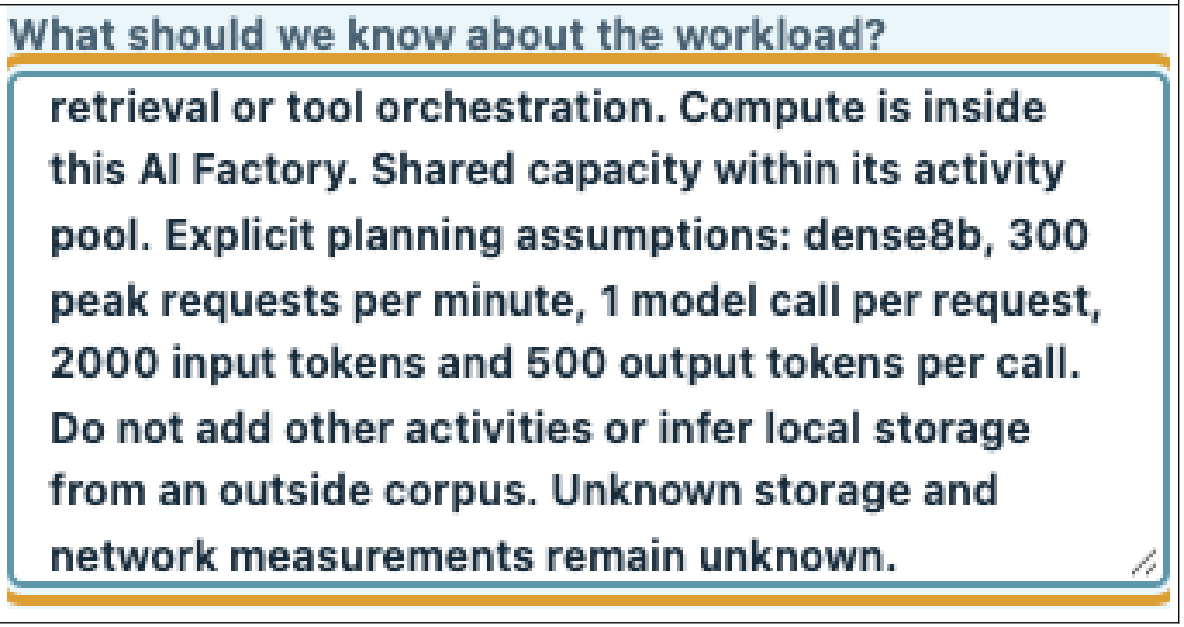
## Copilot assisted workflow

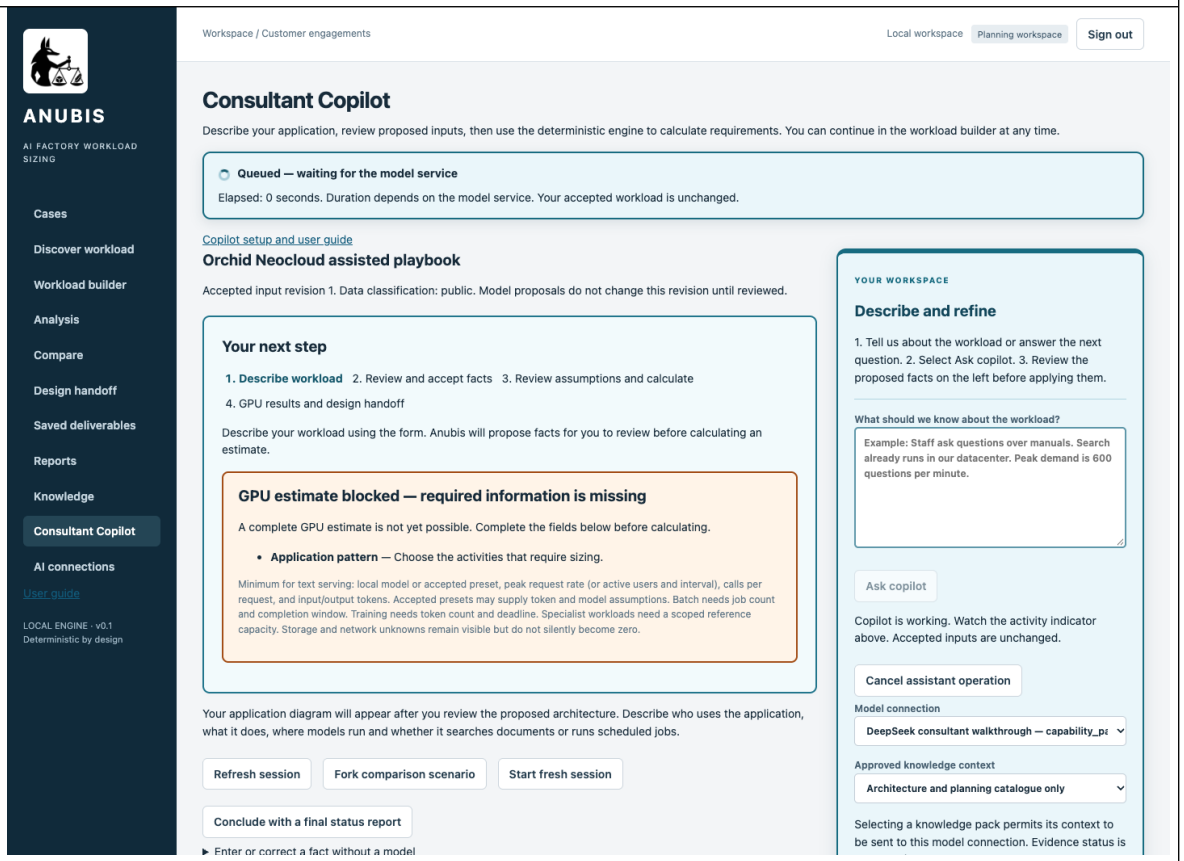
Follow these numbered steps in order. Use a separate engagement name for this route. Input values are the same workload assumptions in both routes. In the assisted route, inspect extracted facts and explicitly enter any specialist reference values in the guided form.

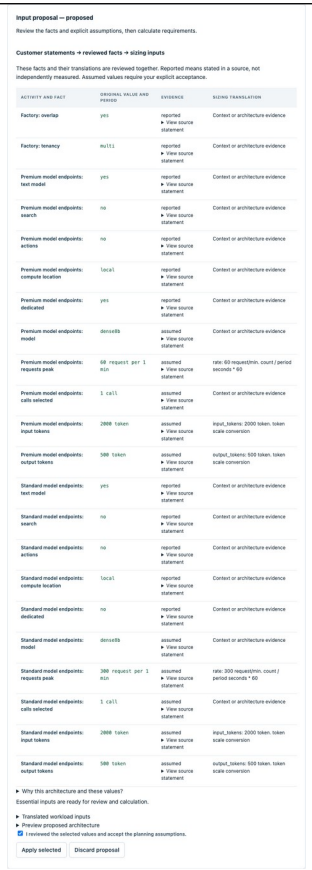
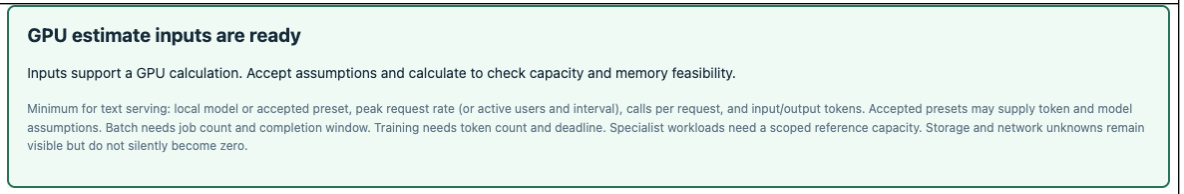
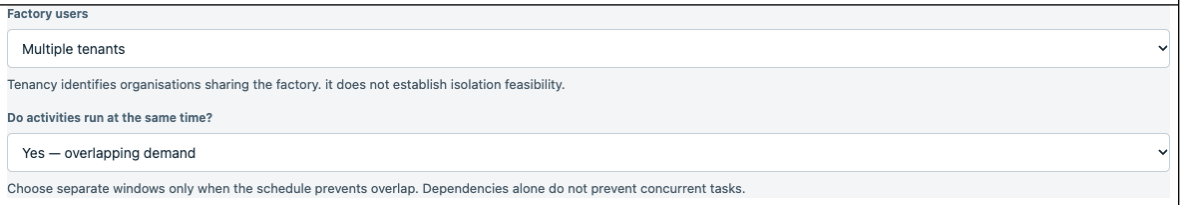
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 1 | Start Anubis and open the local address. Retrieve your private token from `.anubis/identities.json`. Paste it into **Access token** and click **[Open workspace]**. Never share the token. |  |

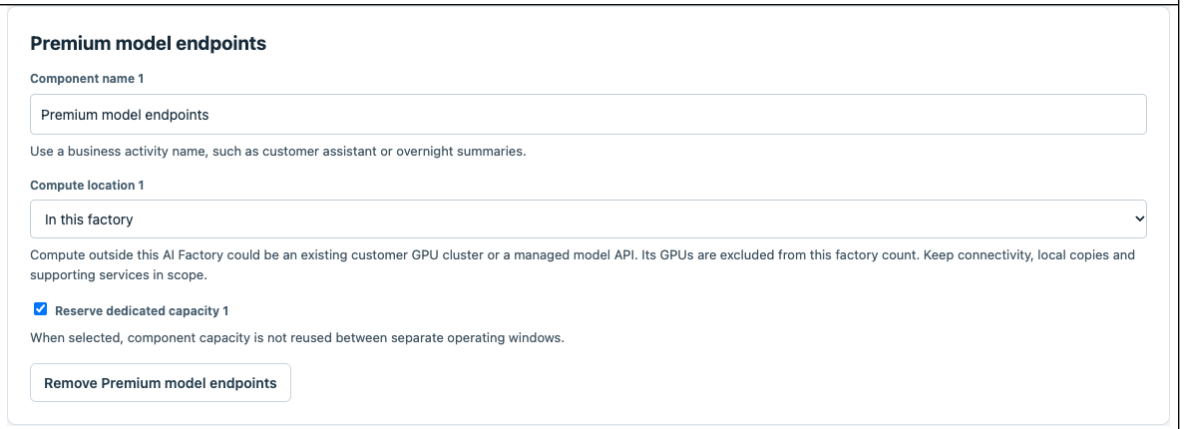
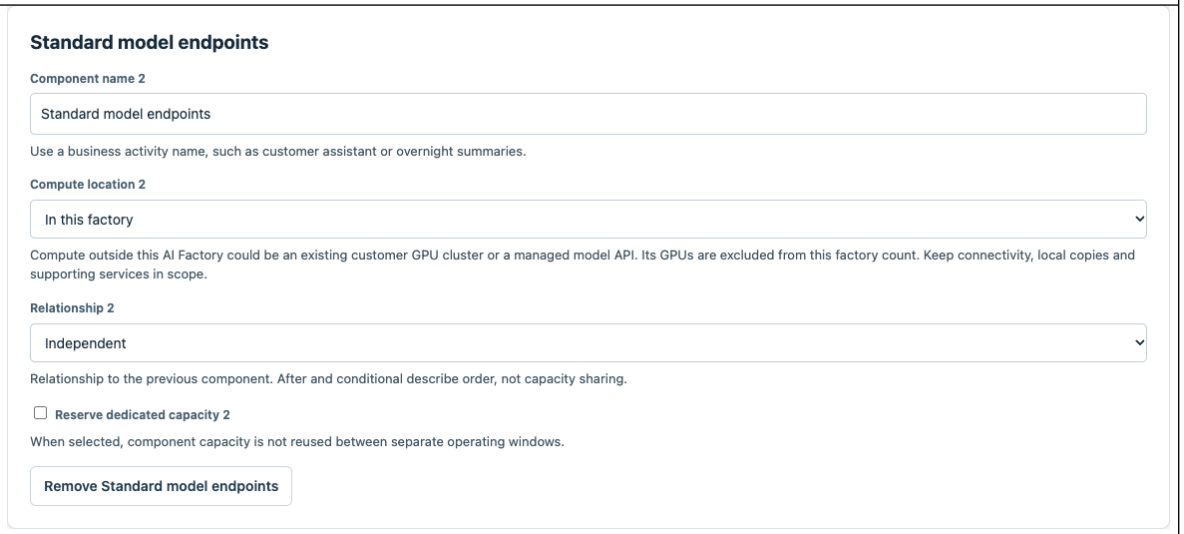
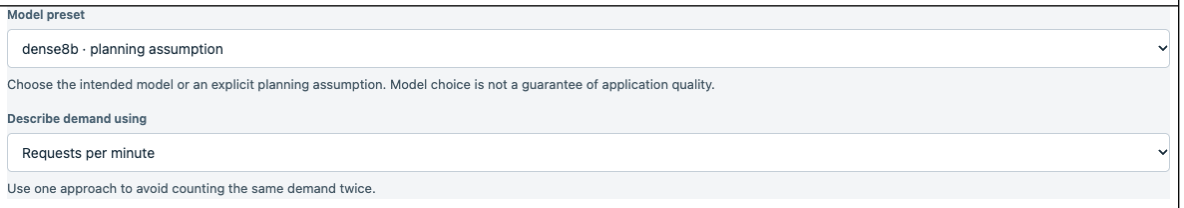
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 2 | Click **[Consultant Copilot]**. Set **Customer workload name** = `Orchid Neocloud assisted playbook`. Set **Data classification** = `Public — permitted for direct provider processing`. Click **[Start assisted engagement]**. |  |

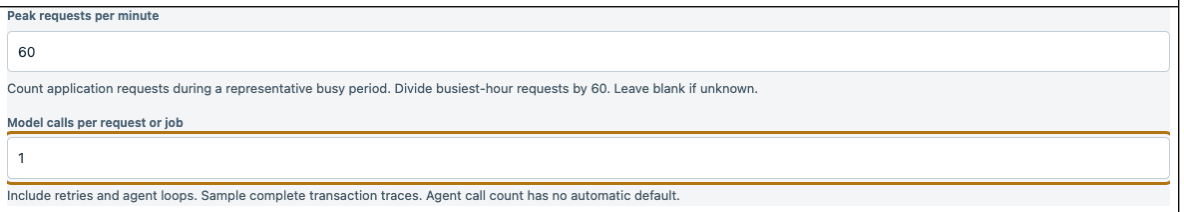
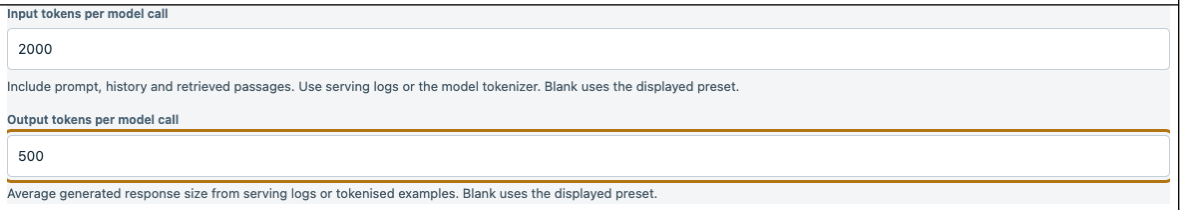
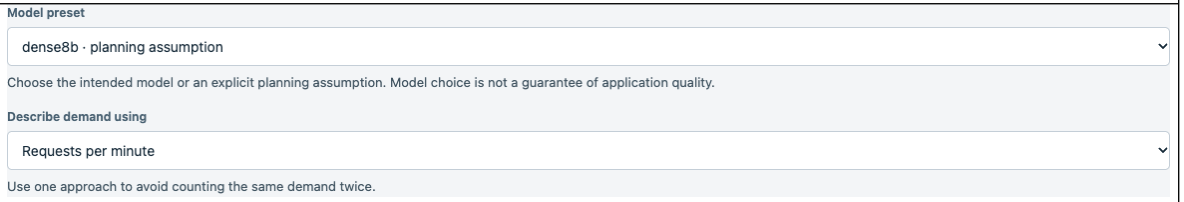
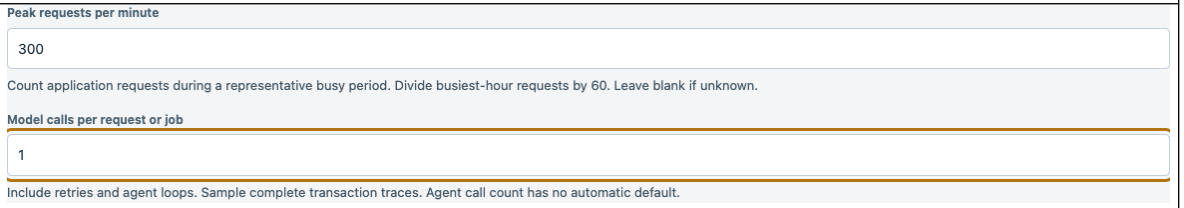
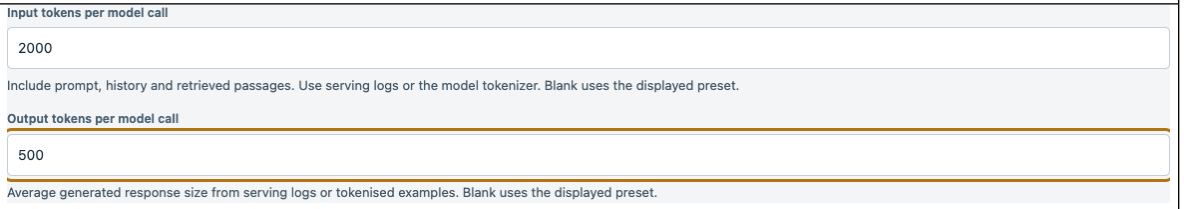
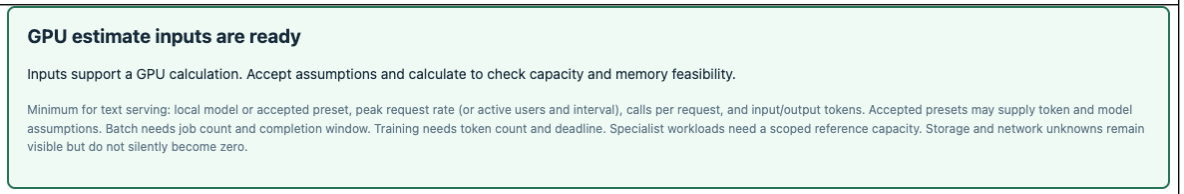
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 3 | Select your tested connection in **Model connection**. Enter the following paragraph in **What should we know about the workload?**: `Fictional customer Orchid Neocloud. This is a planning exercise. Activities can overlap. Multiple tenants share the factory. Use the exact activity name "Premium model endpoints". It serves text with a language model. No retrieval or tool orchestration. Compute is inside this AI Factory. Reserve dedicated capacity for this activity. Explicit planning assumptions: dense8b, 60 peak requests per minute, 1 model call per request, 2000 input tokens and 500 output tokens per call. .` |  |
| 4 | Append the following paragraph to **What should we know about the workload?**: `Use the exact activity name "Standard model endpoints". It serves text with a language model. No retrieval or tool orchestration. Compute is inside this AI Factory. Shared capacity within its activity pool. Explicit planning assumptions: dense8b, 300 peak requests per minute, 1 model call per request, 2000 input tokens and 500 output tokens per call. .` |  |

| Step | Activity and exact values | Screen reference |
|---|---|---|
| 5 | Append the following paragraph to **What should we know about the workload?**: `Do not add other activities or infer local storage from an outside corpus. Unknown storage and network measurements remain unknown.`. Click **[Ask copilot]**. |  |

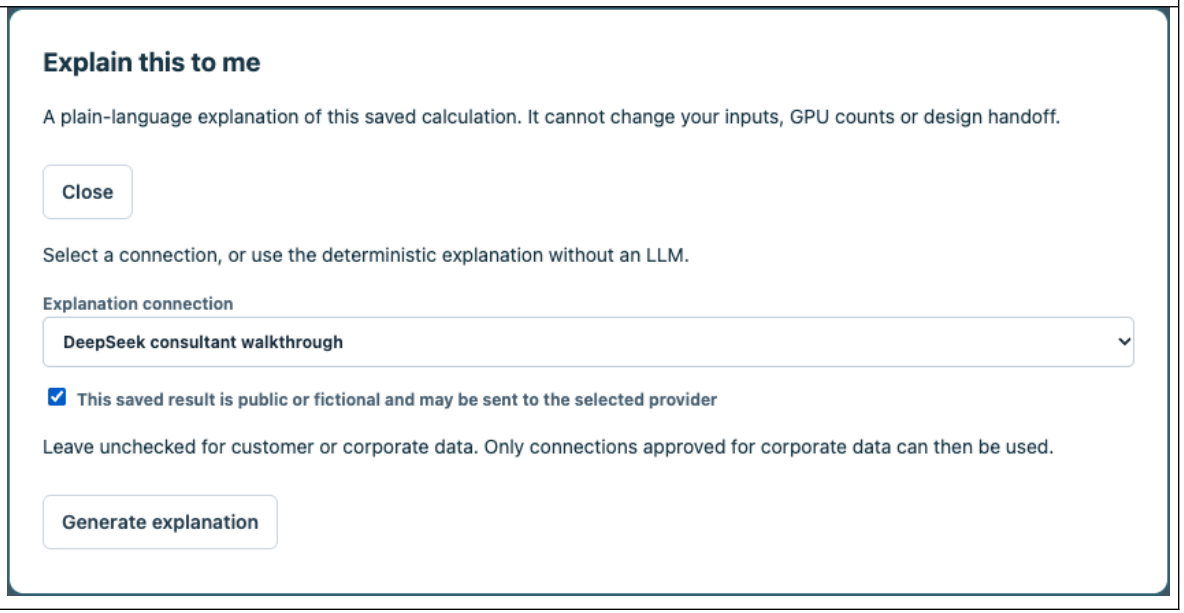
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 6 | Wait while Copilot interprets the description. The active status indicator confirms that it is still working. Do not submit duplicate requests. |  |

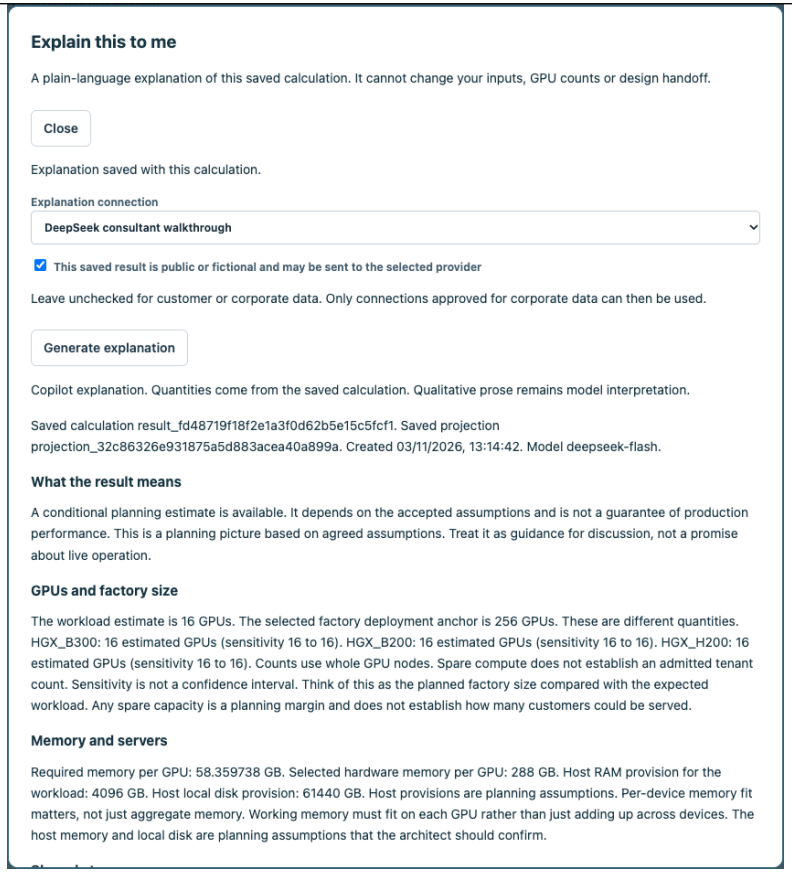
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 7 | Review the proposed activities, placement, measurements and assumptions against the input register. Check **I reviewed the selected values and accept the planning assumptions.**. Click **[Apply selected]**. Specialist reference inputs are entered during the next review. |  |
| 8 | Click **[Review and calculate GPU estimate]**. The readiness panel names any missing inputs. Complete them in the guided review. Copilot has not invented reference throughput. |  |
| 9 | Set **Factory users** = `Multiple tenants`. Set **Do activities run at the same time?** = `Yes — overlapping demand`. |  |

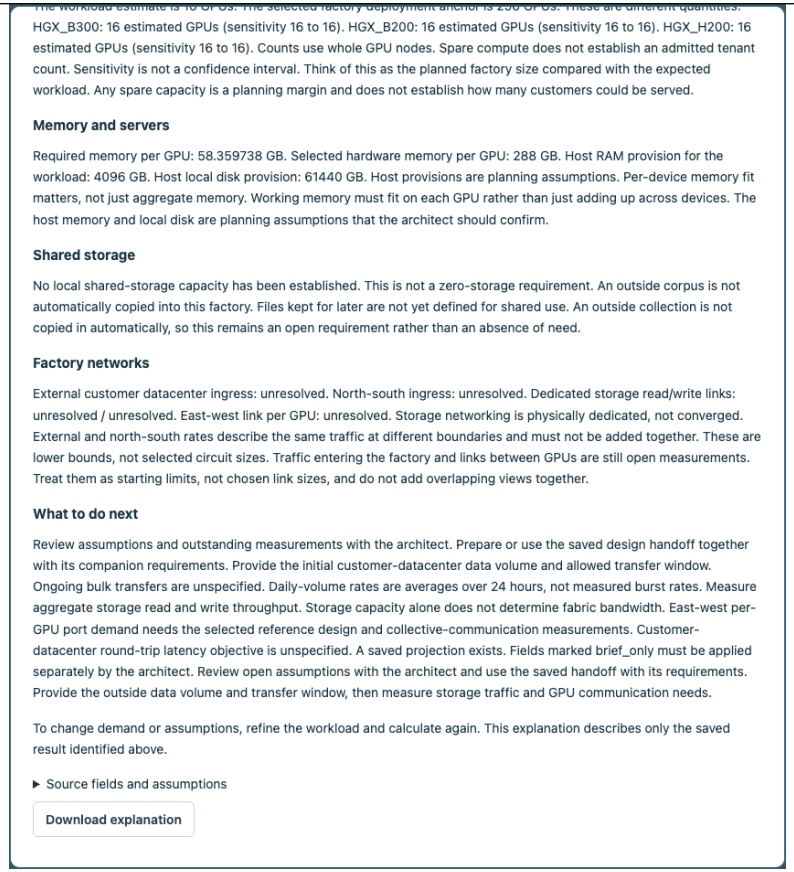
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 10 | Set **Component name 1** = `Premium model endpoints`. Set **Compute location 1** = `In this factory`. Set **Reserve dedicated capacity 1** ***checked***. |  |
| 11 | Set **Component name 2** = `Standard model endpoints`. Set **Compute location 2** = `In this factory`. Set **Reserve dedicated capacity 2** ***unchecked***. Set **Relationship 2** = `Independent`. |  |
| 12 | Set **Model preset** = `dense8b`. Set **Describe demand using** = `Requests per minute`. |  |

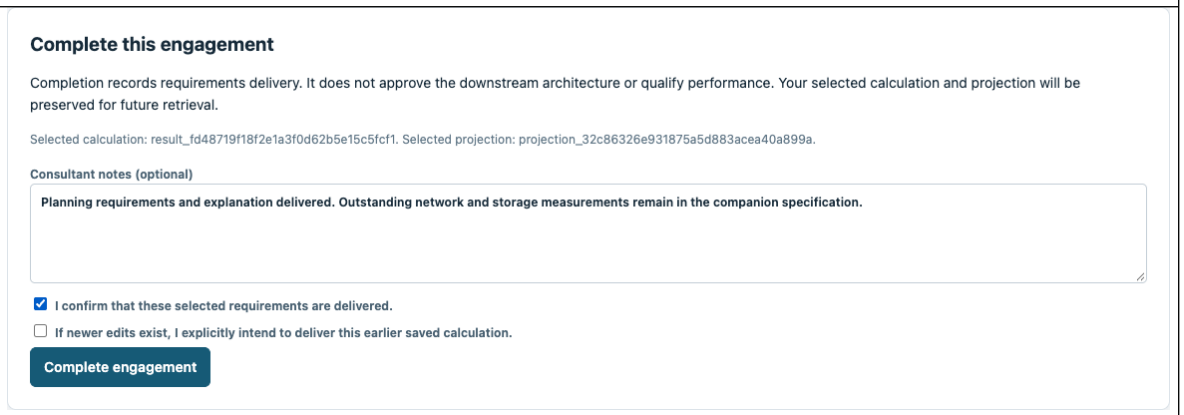
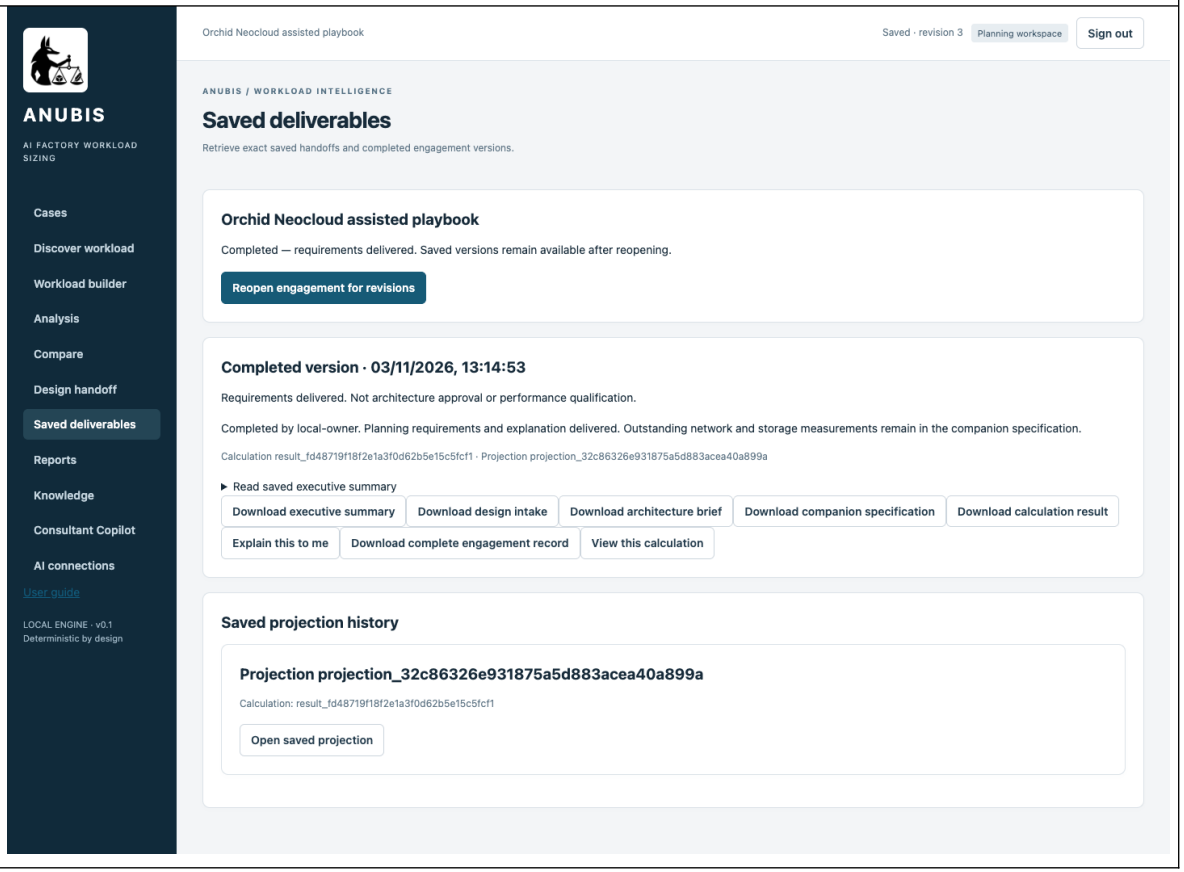
| Step | Activity and exact values | Screen reference |
|---|---|---|
| 13 | Set **Peak requests per minute** = `60`. Set **Model calls per request or job** = `1`. |  |
| 14 | Set **Input tokens per model call** = `2000`. Set **Output tokens per model call** = `500`. |  |
| 15 | Set **Model preset** = `dense8b`. Set **Describe demand using** = `Requests per minute`. |  |
| 16 | Set **Peak requests per minute** = `300`. Set **Model calls per request or job** = `1`. |  |
| 17 | Set **Input tokens per model call** = `2000`. Set **Output tokens per model call** = `500`. |  |
| 18 | Confirm **[GPU estimate inputs are ready]**. Retain the displayed B300 enterprise deployment profile and **Sensitivity envelope** = `±30%`. Check **Use these planning assumptions**. Click **[Calculate estimate]**. |  |

| Step | Activity and exact values | Screen reference |
|---|---|---|
| 19 | Read the GPU workload comparison. Expected B300 = 16, B200 = 16, H200 = 16 GPUs. These workload counts are separate from the 256 GPU factory deployment anchor. Click **[Export result]** to save the calculation. | **GPU workload comparison**<br>Same workload and assumptions on each GPU. Counts include whole 8-GPU nodes and declared failure reserves. These are workload estimates. deployment anchors and downstream design tool platform support are separate.<br>GPU / ESTIMATED GPUS / SENSITIVITY RANGE / VRAM REQUIRED / AVAILABLE / STATUS<br>HGX_B300 / 16 / 16–16 / 58.359738 / 288 GB / conditional<br>HGX_B200 / 16 / 16–16 / 58.359738 / 180 GB / conditional<br>HGX_H200 / 16 / 16–16 / 58.359738 / 141 GB / conditional<br>Download GPU comparison |
| 20 | Click **[Continue to Design handoff]**, then **[Prepare projection]**. Read the executive summary and download the design intake and companion specification. Unresolved network and storage measurements remain explicit. | **AI Factory design executive summary**<br>Explain this to me<br>What this projection means for your design. Generated from saved calculation and mapping fields using fixed narrative rules.<br>• **Decision status:** This is a conditional planning estimate. It uses analytical assumptions rather than measured deployment performance. The projection is partial and its selection is experimental. This projection does not establish live target qualification.<br>▶ Source fields<br>• **Workload compute:** The workload estimate is 16 HGX B300 GPUs, rounded to the supported node size. The sensitivity envelope is 16–16 GPUs for the selected ±30% sensitivity setting. This is not a statistical confidence interval.<br>▶ Source fields<br>• **Factory design size:** The selected reference-design configuration contains 256 GPUs across 32 nodes or trays. This is larger than the workload estimate because of the selected architecture sizing anchor. It does not mean this workload alone requires the entire factory. This profile selection alone does not certify reference-architecture compliance.<br>▶ Source fields<br>• **Capacity for growth:** The selected platform has estimated GPU capacity for 16 simultaneous copies of the same workload profile, including 15 additional copies beyond the first. This is compute capacity only. Storage, host resources, networks and isolation must be checked before admitting additional workloads. It is not a validated tenant limit.<br>▶ Source fields<br>• **GPU alternatives:** HGX B300: 16 GPUs (conditional). HGX B200: 16 GPUs (conditional). HGX H200: 16 GPUs (conditional). These are workload comparisons. Equal node-rounded counts do not imply equal performance, cost or downstream platform support.<br>▶ Source fields<br>• **Memory and server provision:** Estimated GPU memory requirement: 58.36 GB per GPU. Selected hardware provides 288 GB per GPU. Host RAM provision for the workload: 4,096 GB. Local disk provision for the workload: 61,440 GB. The server template assumes 128 CPU cores per node. Host and disk provisions require deployment validation. They are not shared-storage capacity.<br>▶ Source fields<br>• **Shared storage:** No shared-storage tier requirement is established here. This does not mean that the workload needs no storage, or that an existing external corpus must be copied into this factory.<br>▶ Source fields<br>• **GPU interconnect:** The selected east–west fabric is Spectrum-X. Per-GPU link demand is not established. Selecting a fabric does not establish its required bandwidth or guarantee latency.<br>▶ Source fields<br>• **Customer and north–south connectivity:** Customer-datacenter steady traffic lower bounds are 659 kbit/s inbound and 164 kbit/s outbound. Total external ingress requirement: not established. North–south ingress requirement: not established. Initial data-loading capacity remains unresolved. The customer-link latency objective is unspecified. These traffic lower bounds are not recommended circuit sizes. External and north–south boundaries carry the same declared traffic and must not be added together.<br>▶ Source fields<br>• **Storage network:** Use a physically dedicated storage network, separate from the other fabrics. Converged networking is excluded. Technology: Ethernet. Read and write link lower bounds are not established and not established. Missing throughput measurements are not zero.<br>▶ Source fields<br>• **Tenancy:** The workload is framed for multiple tenants. Isolation and the admitted tenant count still require architectural validation.<br>▶ Source fields<br>• **Downstream design handoff:** The intake requests 256 GPUs on HGX B300, with Spectrum-X networking and Ethernet storage-fabric technology. This is a partial transfer. The architect must also use the companion specification. Physical compute, node and NIC details require external reconciliation even where the platform name maps directly.<br>▶ Source fields<br>• **Architect actions:** Apply the brief-only requirements manually. These include the fields identified in the mapping ledger and are not automatically transferred by sending the intake JSON. Resolve outstanding network measurements and reconcile host, storage, physical compute and failure-domain design before final approval.<br>▶ Source fields<br>Download executive summary Narrative rules: projection-narrative-1.1 |

| Step | Activity and exact values | Screen reference |
|---|---|---|
| 21 | Click **[Explain this to me]**. Set **Explanation connection** = `DeepSeek consultant walkthrough`. Check **This saved result is public or fictional and may be sent to the selected provider** for this fictional exercise. Click **[Generate explanation]**. The saved calculation cannot be changed by this action. |  |

| Step | Activity and exact values | Screen reference |
|---|---|---|
| 22 | Read the explanation of the workload GPUs, deployment anchor, memory, storage and all network roles. Expand **[Source fields and assumptions]** to trace the explanation. Click **[Download explanation]**, then **[Close]**. |  |

| Step | Activity and exact values | Screen reference |
|---|---|---|
| 23 | Scroll down within **[Explain this to me]** to read **[Factory networks]** and **[What to do next]**. Expand **[Source fields and assumptions]** if needed. Click **[Download explanation]** to save the text. Scroll to the top and click **[Close]** to continue. |  |

| Step | Activity and exact values | Screen reference |
|---|---|---|
| 24 | Set **Completion notes** = `Planning requirements and explanation delivered. Outstanding network and storage measurements remain in the companion specification.`. Check **I confirm that these selected requirements are delivered.**. Click **[Complete engagement]**. |  |
| 25 | The engagement is complete. Its exact calculation, handoff and explanation remain saved. Use **[Cases]** to reopen the engagement and **[Saved deliverables]** to retrieve its documents. |  |

## Compare and retrieve the results

| Check | Manual route | Copilot assisted route |
|---|---|---|
| Workload GPU counts | B300 16, B200 16, H200 16 | B300 16, B200 16, H200 16 |
| Design handoff | Prepared with companion requirements | Prepared with companion requirements |
| Explanation | Saved deterministic narrative | Saved model-assisted narrative |
| Completion | Requirements delivered and saved | Requirements delivered and saved |

Open the engagement from Cases and select Saved deliverables. Download the saved calculation, intake, brief and companion specification. Explain this to me retrieves narratives associated with that exact result. A later calculation does not update an earlier explanation. Refining demand requires a fresh deterministic calculation.

# Appendix Parameter collection guide

| ID | Field and meaning | How to obtain or decide it | When unavailable |
|---|---|---|---|
| I01 | **Customer workload name**<br>Identifies the two separate saved runs. | Choose the route suffix to avoid mixing results. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I02 | **Factory users**<br>Organisations sharing the factory. | Confirm commercial and organisational scope. Tenancy does not multiply aggregate demand automatically. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I03 | **Do activities run at the same time?**<br>Peak workloads may coincide. | Review schedules and telemetry with the operations owner. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I04 | **Component name**<br>Business activity being sized. Numbered labels follow the order of components in the active route. | Agree a recognisable activity name with the application owner. Use the matching diagram to check its scope. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I05 | **Application pattern**<br>Application behaviour, not a server type. | Walk through a customer task. Identify text serving, retrieval, media processing or solver work. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I06 | **Compute location**<br>Where computation runs relative to this factory. | Confirm the hosting owner and deployment boundary. Outside services do not contribute local model GPUs. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I07 | **Relationship**<br>Order or relationship of activities. This is separate from whether demand overlaps. | Review the business flow with the application owner. Confirm scheduling separately. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I08 | **Model preset**<br>Language-model size and architecture preset. It is not a quality guarantee. | Use the model registry or serving configuration. Record an explicitly accepted assumption when the model has not been selected. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |

| ID | Field and meaning | How to obtain or decide it | When unavailable |
|---|---|---|---|
| I09 | **Peak requests per minute**<br>Busy-period application requests per minute. | Count application gateway requests by minute in a representative peak. Divide busiest-hour requests by sixty only when that average is an accepted planning basis. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I10 | **Model calls per request or job**<br>Model invocations per complete customer request, including retries. | Inspect distributed transaction traces or model gateway logs. Count calls across the entire request, including agent loops. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I11 | **Input tokens per model call**<br>Prompt, history and retrieved passages sent to a model call. | Read prompt-token metrics from serving logs or tokenize representative full prompts with the exact model tokenizer. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I12 | **Output tokens per model call**<br>Generated response tokens per model call. | Read completion-token metrics or tokenize representative outputs. Choose a planning distribution with the service owner. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I13 | **Reserve dedicated capacity**<br>Whether this activity keeps capacity reserved rather than reusing a pool. | Agree isolation and reservation requirements with the service owner. Tenant count is not automatically a GPU multiplier. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I14 | **Component name**<br>Business activity being sized. Numbered labels follow the order of components in the active route. | Agree a recognisable activity name with the application owner. Use the matching diagram to check its scope. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I15 | **Application pattern**<br>Application behaviour, not a server type. | Walk through a customer task. Identify text serving, retrieval, media processing or solver work. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I16 | **Compute location**<br>Where computation runs relative to this factory. | Confirm the hosting owner and deployment boundary. Outside services do not contribute local model GPUs. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I17 | **Relationship**<br>Order or relationship of activities. This is separate from whether demand overlaps. | Review the business flow with the application owner. Confirm scheduling separately. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |

| ID | Field and meaning | How to obtain or decide it | When unavailable |
|---|---|---|---|
| I18 | **Model preset**<br>Language-model size and architecture preset. It is not a quality guarantee. | Use the model registry or serving configuration. Record an explicitly accepted assumption when the model has not been selected. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I19 | **Peak requests per minute**<br>Busy-period application requests per minute. | Count application gateway requests by minute in a representative peak. Divide busiest-hour requests by sixty only when that average is an accepted planning basis. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I20 | **Model calls per request or job**<br>Model invocations per complete customer request, including retries. | Inspect distributed transaction traces or model gateway logs. Count calls across the entire request, including agent loops. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I21 | **Input tokens per model call**<br>Prompt, history and retrieved passages sent to a model call. | Read prompt-token metrics from serving logs or tokenize representative full prompts with the exact model tokenizer. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I22 | **Output tokens per model call**<br>Generated response tokens per model call. | Read completion-token metrics or tokenize representative outputs. Choose a planning distribution with the service owner. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I23 | **Infrastructure deployment profile**<br>Selects factory anchors rather than workload demand. | Architect selects a compatible catalogue profile. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I24 | **Sensitivity envelope**<br>Explores faster and slower throughput assumptions. | Choose the agreed planning sensitivity. It is not a confidence interval. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I25 | **Use these planning assumptions**<br>Accepts the displayed planning defaults. | Review defaults before calculating. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I26 | **Locally retained data in TB / Daily growth in GB**<br>No local shared-storage amount is established. Blank is not zero. | Inventory actual local retained copies. Do not copy an outside corpus into this value. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |

| ID | Field and meaning | How to obtain or decide it | When unavailable |
|---|---|---|---|
| I27 | **Initial dataset to load in TB / Initial loading window in hours**<br>Initial transfer scope and time remain unresolved. | Obtain transfer volume and the allowed window from the data owner. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I28 | **Ongoing incoming / outgoing data in GB per day**<br>Bulk daily transfer volumes remain unspecified. | Measure ingress and egress counters separately from model token traffic. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I29 | **Aggregate storage reads / writes in Gbps**<br>Dedicated storage fabric throughput remains unresolved. | Measure directional read and write payload peaks. Capacity alone cannot determine bandwidth. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I30 | **East-west payload per GPU in Gbps / Customer datacenter round-trip target in ms**<br>Collective traffic and latency objective remain unresolved. | Use GPU communication telemetry and an agreed RTT objective. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I31 | **Usable link fraction / Initial loading overlap**<br>Accepted network defaults. Storage networking is physically dedicated. | Review usable bandwidth and whether loading coincides with normal operation. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I32 | **Explanation connection**<br>Chooses prose generation without changing the calculation. | Configure an approved provider in AI connections. Backend credentials stay on the server. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |
| I33 | **This saved result is public or fictional and may be sent to the selected provider**<br>Permission to send the saved explanation packet to the chosen connection. | Leave unchecked for corporate data and select a connection approved for that data. | Record the unknown or an explicitly accepted assumption. Resolve any field listed by GPU estimate blocked before calculating. |

# Appendix Placement and explanation boundaries

| Term | Meaning and concrete examples |
|---|---|
| Outside this AI Factory | Compute, search or storage beyond the capacity being designed. Examples include a customer GPU cluster, managed model API, customer datacenter search cluster, cloud search platform or an existing object store. It does not necessarily mean public Internet or a different site. |
| Source corpus and index | Original documents and the searchable index have separate storage and compute footprints. Examples include an NFS or SMB share, object storage, SharePoint and an OpenSearch index. Outside data is not automatically a local retained copy or initial transfer volume. |
| Model explanation | The LLM explains a saved result using a read-only packet. Numeric facts are inserted by the server. Invalid or unavailable model responses fall back to deterministic text. Qualitative prose remains interpretation, not a new engineering decision. |
| Reference capacity | Specialist counts use the exact per-hardware throughput and memory assumptions in the register. The example values are fictional planning assumptions. A complete independent group can be replicated. No linear scaling of a single larger job is inferred. |
| Validation scope | Both GUI routes were executed against the application and checked for matching GPU comparisons and saved handoffs. This validates the software workflow. It does not qualify real hardware performance, model quality, latency or live-provider reliability for every future request. |