# W03 Learning Activities

- Due Mar 19 at 4:59pm
- Points 15
- Questions 13
- Available until Mar 26 at 4:59pm
- Time Limit None
- Allowed Attempts 3

# Instructions

1. **Complete** the **learning activities.** **(https://byui-cse.github.io/wdd131-ww-course/week03/)**
2. **Complete** this quiz to check your understanding.
3. Conditions
   - The quiz is open note, application, and internet.
   - Your latest score will be recorded in the gradebook.

Take the Quiz Again

## Attempt History

| | Attempt | Time | Score |
|---|---|---|---|
| **KEPT** | Attempt 2 | less than 1 minute | 15 out of 15 |
| **LATEST** | Attempt 2 | less than 1 minute | 15 out of 15 |
| | Attempt 1 | 30 minutes | 14 out of 15 |

Correct answers are hidden.

Score for this attempt: 15 out of 15
Submitted Mar 15 at 10:26pm
This attempt took less than 1 minute.

Question 1
3 / 3 pts
I completed all the assigned learning activities for this week.

- True
- False

Question 2
1 / 1 pts

A member of your group has used these two images in their responsive image assignment. What feedback would you give them?
Check all that apply.

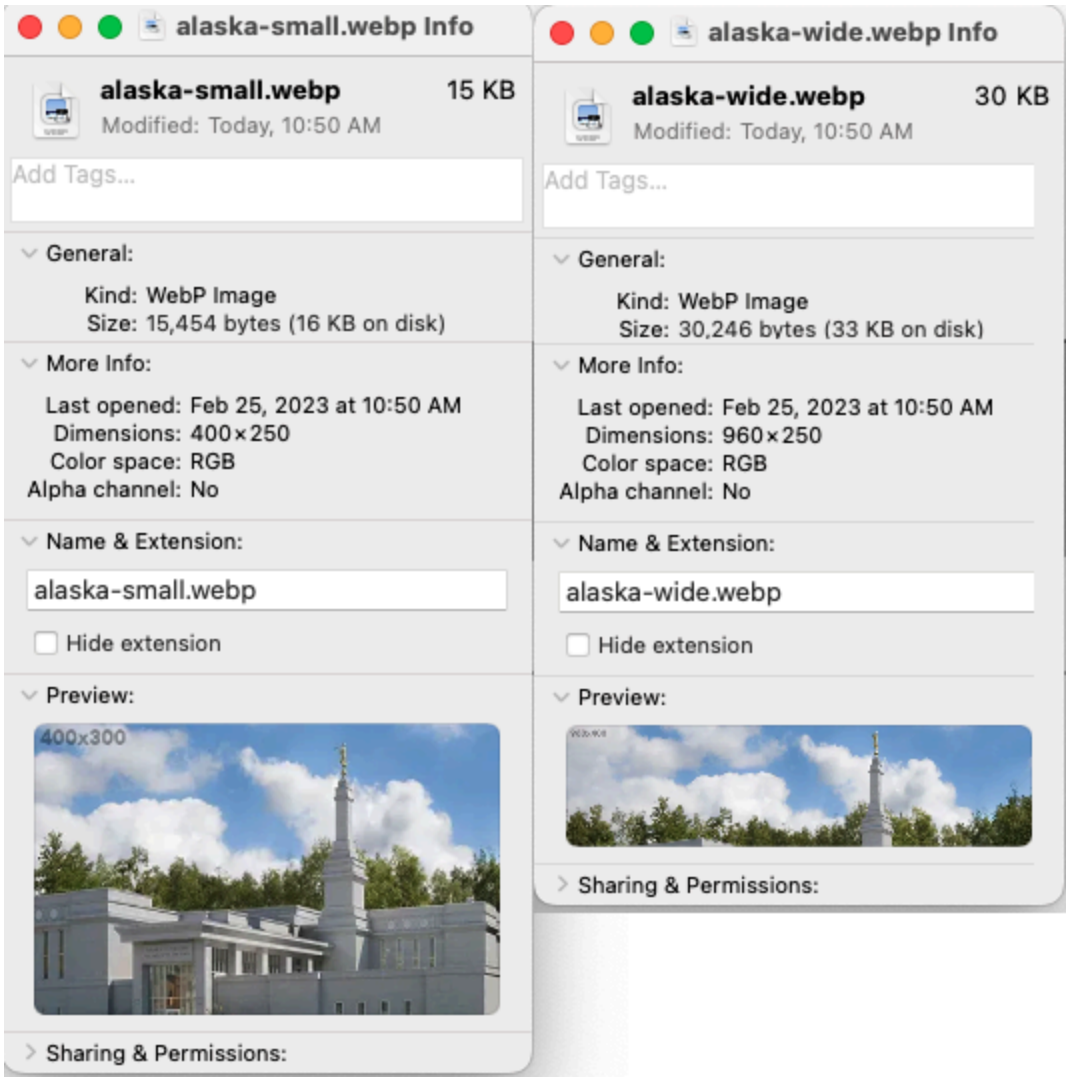


- [ ] The files are saved using the image file types that are not supported on the web.
- [ ] Your images are too large, try reducing them using an image editing program.
- [x] Everything looks great, keep up the good work.
- [ ] The file size (KB) for these images are way too big.

Question 3
1 / 1 pts

A student has this code for their responsive image. What feedback would you give them?
Check all the apply.

```
<picture>
  <source srcset="images/hero-small.webp" media="(max-width: 500px)">
  <source srcset="images/hero-medium.webp" media="(max-width: 1000px)">
```

```
  <img srcset="images/hero-large.webp" alt="Hero Photo" width="500" height="250">
</picture>
```

- [ ] You forgot to add the units (px) to the width and height attribute values.
- [ ] Your source references are missing alt attributes.
- [ ] You have the two source element lines backwards.
- [ ] You are not allowed to use max-width with the <source> element's media attribute.
- [x] Good job, the code looks good.

Question 4

1 / 1 pts

One of your peers is confused as to why these JavaScript statements do not work as intended. They report that when a valid chapter is entered into the HTML input field with an id of "favchap" the message on the screen is wrong saying that the favorite chapter is something like [object HTMLInputElement]. And when they do not enter anything into the input field, the message is still outputting the "Thank you. your favorite chapter is [object HTMLInputElement]".

What advice would you give them?

Check all the apply.

```
const message = document.querySelector('#message');
const input = document.querySelector('#favchap');
if (input !== "") {
  message.innerHTML = `Thank you. Your favorite chapter is ${input}.`;
} else {
  message.innerHTML = `Please enter a chapter.`;
}
```

- [ ] Use single quotes and not double quotes in the if block condition.
- [x] Reference the value property of the #favchap input element, not just the element.
- [ ] Template literal strings (`...`) cannot be used to produce output to the screen.
- [ ] The HTML input element must have an id of "input" to match the variable identifier used.

Question 5

1 / 1 pts

Another student has reviewed your favorite chapter application and commented that you must use **innerHTML** versus **textContent** when providing the list item's content.

```
li.innerHTML = item;
```

versus

```
li.textContent = item;

What would be your reply to them?
Mark all that apply.
```

- [ ] Using the textContent property is the only option when working with HTML list item content.
- [x] Either property will work in this case given that the item variable is a simple string.
- [ ] Using innerText would be the best option in this case.
- [x] That would be true if the item variable contained HTML tags.

Question 6

1 / 1 pts

JavaScript uses type conversion to coerce any value to a Boolean in contexts that require it, such as conditionals and loops. A **falsy** value is a value that is considered false when encountered in a Boolean context. Which of the following are JavaScript falsy values?

- [ ] 999
- [x] null
- [ ] "False"
- [x] NaN (not a number)
- [ ] "0"
- [x] '', "", or ``
- [x] 0
- [x] undefined

Question 7

1 / 1 pts

Which of the following methods can be used to add elements to the end of an **array** in JavaScript?

- ( ) add()
- ( ) unshift()
- (•) push()
- ( ) spice()

Question 8

1 / 1 pts

Given the following code snippet, which of the following is the output to the console?

```
let scores = [100, 72, 83, 94, 88, 87];
let accumulator = 0;
let count = 0;
scores.forEach(score => {
  if (score > 87) {
    accumulator += score;
```

```
    count ++;
  }
});
if ( count > 0 ) {
  console.log(accumulator/count);
} else {
  console.log("No scores reported.");
}
```

- 87.5
- No scores reported.
- 92.25
- 94

Question 9

1 / 1 pts

Which of the following code expressions produces the last element (index) of any **array**?

- array.length
- array.length - 1
- array.lastIndex()
- array.lastIndex

Question 10

1 / 1 pts

Rewrite (refactor) this function declaration by using an arrow function instead of a function declaration.

```
function fullName(first, last) {
  return `${first} ${last}`;
}
```

- const generateFullName = (first, last) {first.concat(' ', last);}
- const fullName = function (first, last) { `${first} ${last}`;}
- function = first + " " + last`
- const fullName = (first, last) => `${first} ${last}`;

Question 11

1 / 1 pts

In a JavaScript function declaration, which of the following is the keyword used to declare a function?

- def
- func
- functionBlock

- function

Question 12

1 / 1 pts

*Finish this statement.*

The _____ pseudo-class is useful for declaring global CSS variables and represents the <html> element and is identical to the selector html, except that its specificity is higher.

- html
- specific
- root
- global

Question 13

1 / 1 pts

Which of the following statements regarding pseudo-elements in CSS is correct?

- Pseudo-elements allow you to create virtual elements that do not exist in the HTML document.
- Pseudo-elements are used to style elements based on their position in the document tree.
- Pseudo-elements are represented by double colons (::) and are used to style specific parts of an element.
- Pseudo-elements are used to select and style elements based on their attributes.

Quiz Score: 15 out of 15

COPYRIGHT 2026 BYU-PATHWAY WORLDWIDE