Application Programming Interface

[API]

Integration Document

DOCUMENT INFORMATION

Title:	RedSpeed Integration Document
Description:	This document gives procedures for integrating RedSpeed API with Merchants applications. It gives detailed step-by-step procedures and sample codes
How to generate API:	https://redspeed.redstarplc.com/dashboard/user-api-keys
Prepared By:	RSE Allied Services Ltd.
URL:	http://redspeedopenapi.redstarplc.com/swagger/index.html
Prepared by:	I.S

INTRODUCTION

RedSpeed API is a restful Web API to expose some functionalities of RedSpeed to Merchants thereby empowering the Merchants to carry out operational activities exposed via the API without intervention from Red Star Express Plc. Some of the functionalities (Endpoints) exposed to Merchants are listed below:

- List of Origin and Destinations Cities
- List of Onforwarding/Delivery Towns by Destination Cities
- List of Payment Types
- Submission of Shipment Pickup Request
- Tracking of Shipment
- List of all Tracking Status
- Printing of Waybill
- List Merchants Shipments Status
- List of DropOffLocation
- List of PickupTypes

Detailed procedures of implementing each of the functionalities listed above are provided in the subsequent pages of this document. This document provides step-by-step procedure needed to integrate any application with REDSPEED API. Sample codes are provided on how to integrate each of the functionality.

REDSPEED API implements Token-based authentication system in which every user is expected to supply valid credentials to obtain Token with which any of the functionalities listed above can be accessed.

HOW TO GENERATE API

https://redspeed.redstarplc.com/

http://redspeedopenapi.redstarplc.com/swagger/index.html

Login to your REDSPEED webpage go to your profile click of the API key on the left side bar then click generate API.

LOGIN --------- PROFILE ----------LEFT-SIDEBAR---------API KEY ----------GENERATE API KEY

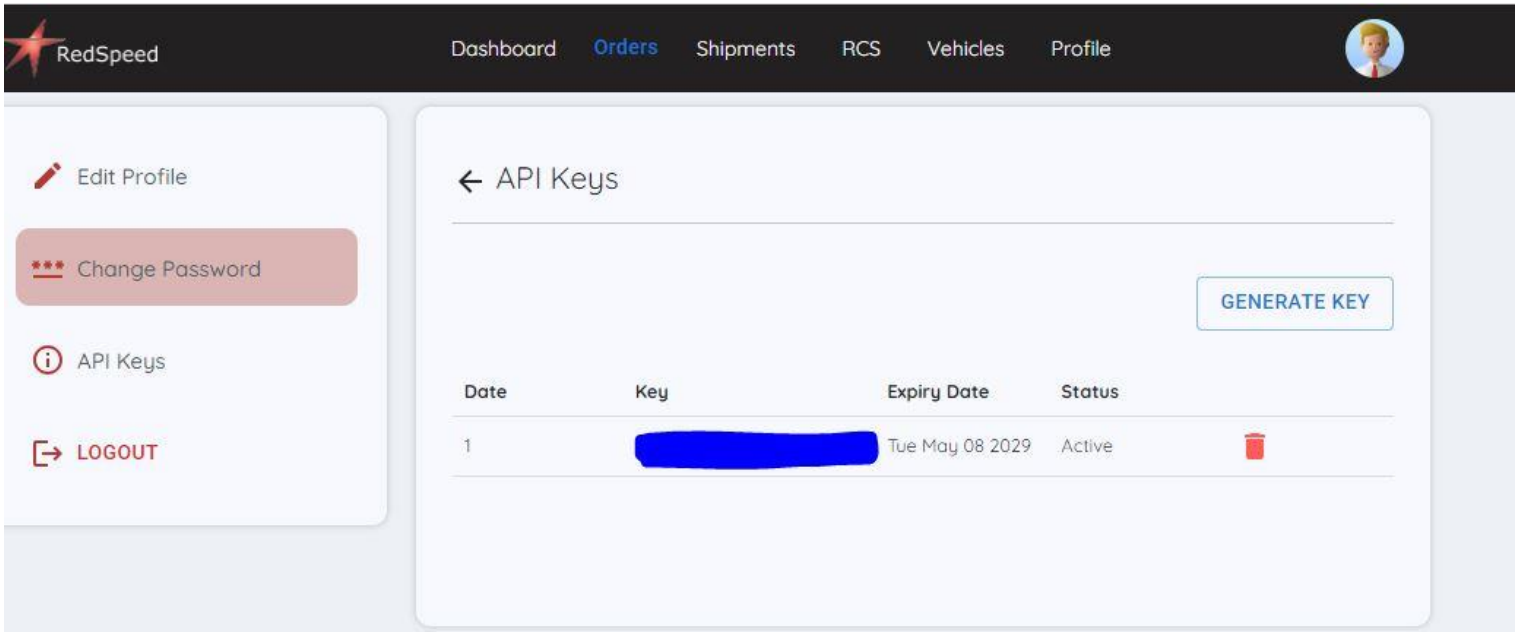

Fetching All Origin Cities and Destination Cities

Available Origins and Destinations Cities for which shipments can be picked and delivered are made available through the API. This is necessary for the clients to be able to pick correct Origin and Destination for which shipments are to be sent. Response is retrieved as array of Json objects that the client application can use to populate Dropdown box from which users select desired origin and destination.

Curl -X GET "http://redspeedopenapi.redstarplc.com/api/Operations/Cities" -H "accept: text/plain"
URI: http://redspeedopenapi.redstarplc.com/api/Operations/Cities

Response headers

```
content-type: application/json; charset=utf-8
date: Tue04 Jun 2024 11:16:31 GMT
server: Microsoft-IIS/10.0
transfer-encoding: chunked
x-powered-by: ASP.NET
```

Request Type: GET
ContentType: application/Json

Onforwarding / Delivery Towns:

Onforwarding /DeliveryTowns can be selected based on already selected City. These are Towns under major cities for which REDSPEED can deliver shipment through the API. Response is retrieved as array of Json objects that the client application can use to populate Dropdown box from which users select desired Onforwarding/Delivery Towns.

CURL: curl -X GET "http://redspeedopenapi.redstarplc.com/api/Operations/DeliveryTowns/RSMLD012063" -H "accept: text/plain" -H "X-API-KEY: blmjvajtusnglgeitvpmkjgrp"

http://redspeedopenapi.redstarplc.com/api/Operations/DeliveryTowns/RSMLD012063

Server response:

Server response

Code	Details
200	Response body

```
[]
```

Download

Response headers

```
content-type: application/json; charset=utf-8
date: Tue04 Jun 2024 11:34:41 GMT
server: Microsoft-IIS/10.0
transfer-encoding: chunked
x-powered-by: ASP.NET
```

Responses

Code	Description	Links
200	Success	No links

Media type

text/plain

Controls Accept header.

Example Value | Schema

```
[
  {
    "id": 0,
    "cityId": 0,
    "abbr": "string",
    "name": "string",
    "city": {
      "id": 0,
      "abbr": "string",
      "name": "string"
    }
  }
]
```

Tracking Shipments:

Shipments can be tracked using the Waybill Number of the shipment through the API. Response is retrieved as array of Json objects that the client application can display as tracking information to users.

URL: http://redspeedopenapi.redstarplc.com/api/Operations/ShipmentStatus

CURL: curl -X GET "http://redspeedopenapi.redstarplc.com/api/Operations/ShipmentStatus" -H "accept: text/plain" -H "X-API-KEY: blmjvajtusnglgeitvpmkjgrp"

Server response

Code | Details

200

Response body


```
[
  {
    "statusCode": 0,
    "statusDescription": "New"
  },
  {
    "statusCode": 1,
    "statusDescription": "Picked"
  },
  {
    "statusCode": 2,
    "statusDescription": "Arrived at Origin Hub"
  },
  {
    "statusCode": 3,
    "statusDescription": "Arrived at Transit Gateway"
  },
  {
    "statusCode": 4,
    "statusDescription": "Await Crating / Packing"
  },
  {
    "statusCode": 5,
    "statusDescription": "Reweighed"
  },
  {
    "statusCode": 6,
    "statusDescription": "Sorted to Origin city"
  },
```


Download

Response headers

```
content-length: 1532
content-type: application/json; charset=utf-8
date: Tue04 Jun 2024 11:50:26 GMT
server: Microsoft-IIS/10.0
x-powered-by: ASP.NET
```

PayWithPayStack:

Make Payment for shipments via PayStack payment platform. This endpoint is an Authenticated Post endpoint. All that is required is to redirect to the value returned in the “CheckoutURL” of the Json object.

CURL: curl -X GET "http://redspeedopenapi.redstarplc.com/api/Operations/PaymentTypes" -H "accept: */*" -H "X-API-KEY: blmjvajtusnglgeitvpmkjgrp"

URL: http://redspeedopenapi.redstarplc.com/api/Operations/PaymentTypes

Server response

Code	Details
200	Response body


```
[
  {
    "No": 1,
    "Name": "Prepaid"
  },
  {
    "No": 2,
    "Name": "Pay On Delivery"
  }
]
```


Download

Response headers

```
content-length: 61
content-type: application/json; charset=utf-8
date: Tue04 Jun 2024 11:57:37 GMT
server: Microsoft-IIS/10.0
x-powered-by: ASP.NET
```

Responses

Code	Description	Links
200	Success	*No links*

DropOff Locations:

Drop-Off locations can be selected based on already selected City. These are Red Star Express Drop-Off location addresses in major cities.

CURL: curl -X GET "http://redspeedopenapi.redstarplc.com/api/Operations/DropOffLocations/RSMLD012063" -H "accept: text/plain" -H "X-API-KEY: blmjvajtusnglgeitvpmkjgrp"

Request URL: http://redspeedopenapi.redstarplc.com/api/Operations/DropOffLocations/RSMLD012063

Server response

Code	Details
200	Response body [] Download Response headers content-length: 2 content-type: application/json; charset=utf-8 date: Tue04 Jun 2024 12:03:10 GMT server: Microsoft-IIS/10.0 x-powered-by: ASP.NET

Responses

Code	Description	Links

200	Success
	Media type
	text/plain
	Controls Accept header.
	Example Value | Schema
	[
	{
	"name": "string",
	"address": "string",
	"abbr": "string"
	}
	]
		No links

PickupTypes:

Curl: curl -X GET "http://redspeedopenapi.redstarplc.com/api/Operations/PickupTypes" -H "accept: */*" -H "X-API-KEY: blmjvajtusnglgeitvpmkjgrp"

Request URL: http://redspeedopenapi.redstarplc.com/api/Operations/PickupTypes

Server response

Code	Details
200	Response body


```
[
  {
    "PickupTypeId": 1,
    "PickupType": "Pickup from my Address"
  },
  {
    "PickupTypeId": 2,
    "PickupType": "Drop-off in RSE Location"
  }
]
```


Response headers

```
content-length: 117
content-type: application/json; charset=utf-8
date: Tue04 Jun 2024 12:06:26 GMT
server: Microsoft-IIS/10.0
x-powered-by: ASP.NET
```

Responses

Code	Description
200	Success

Get Merchant Shipments Status:

Merchants can pull shipment transaction status changes that have happened on their shipments for any specified date/time ranges. Response is retrieved as array of Json objects.

Curl

curl -X GET "http://redspeedopenapi.redstarplc.com/api/Operations/MerchantShipmentStatus?DateTimeFrom=13-05-2024&DateTimeTo=04-06-2024" -H "accept: text/plain" -H "X-API-KEY: blmjvajtusnglgeitvpmkjgrp"

Request URL: http://redspeedopenapi.redstarplc.com/api/Operations/MerchantShipmentStatus?DateTimeFrom=13-05-2024&DateTimeTo=04-06-2024

200 No link

Success

Media type

text/plain

Controls Accept header.

Example Value | Schema


```
[
  {
    "id": 0,
    "status": 0,
    "createdOn": "2024-06-04T12:16:42.032Z",
    "createdBy": "string",
    "updatedOn": "2024-06-04T12:16:42.032Z",
    "updatedBy": "string",
    "sbuId": 0,
    "waybillNumber": "string",
    "recipientId": 0,
    "originId": 0,
    "cityId": 0,
    "townId": 0,
    "originTownId": 0,
    "type": "string",
    "serviceGroup": "string",
    "senderAccountNo": "string",
    "senderName": "string",
    "senderAddress": "string",
    "senderPhone": "string",
    "flyerNo": "string",
    "packaging": "string",
    "boxandCrating": "string",
    "deliveryType": "string",
    "contentDescription": "string",
    "onforwardingLocation": "string",
    "insured": true,
    "length": 0,
```