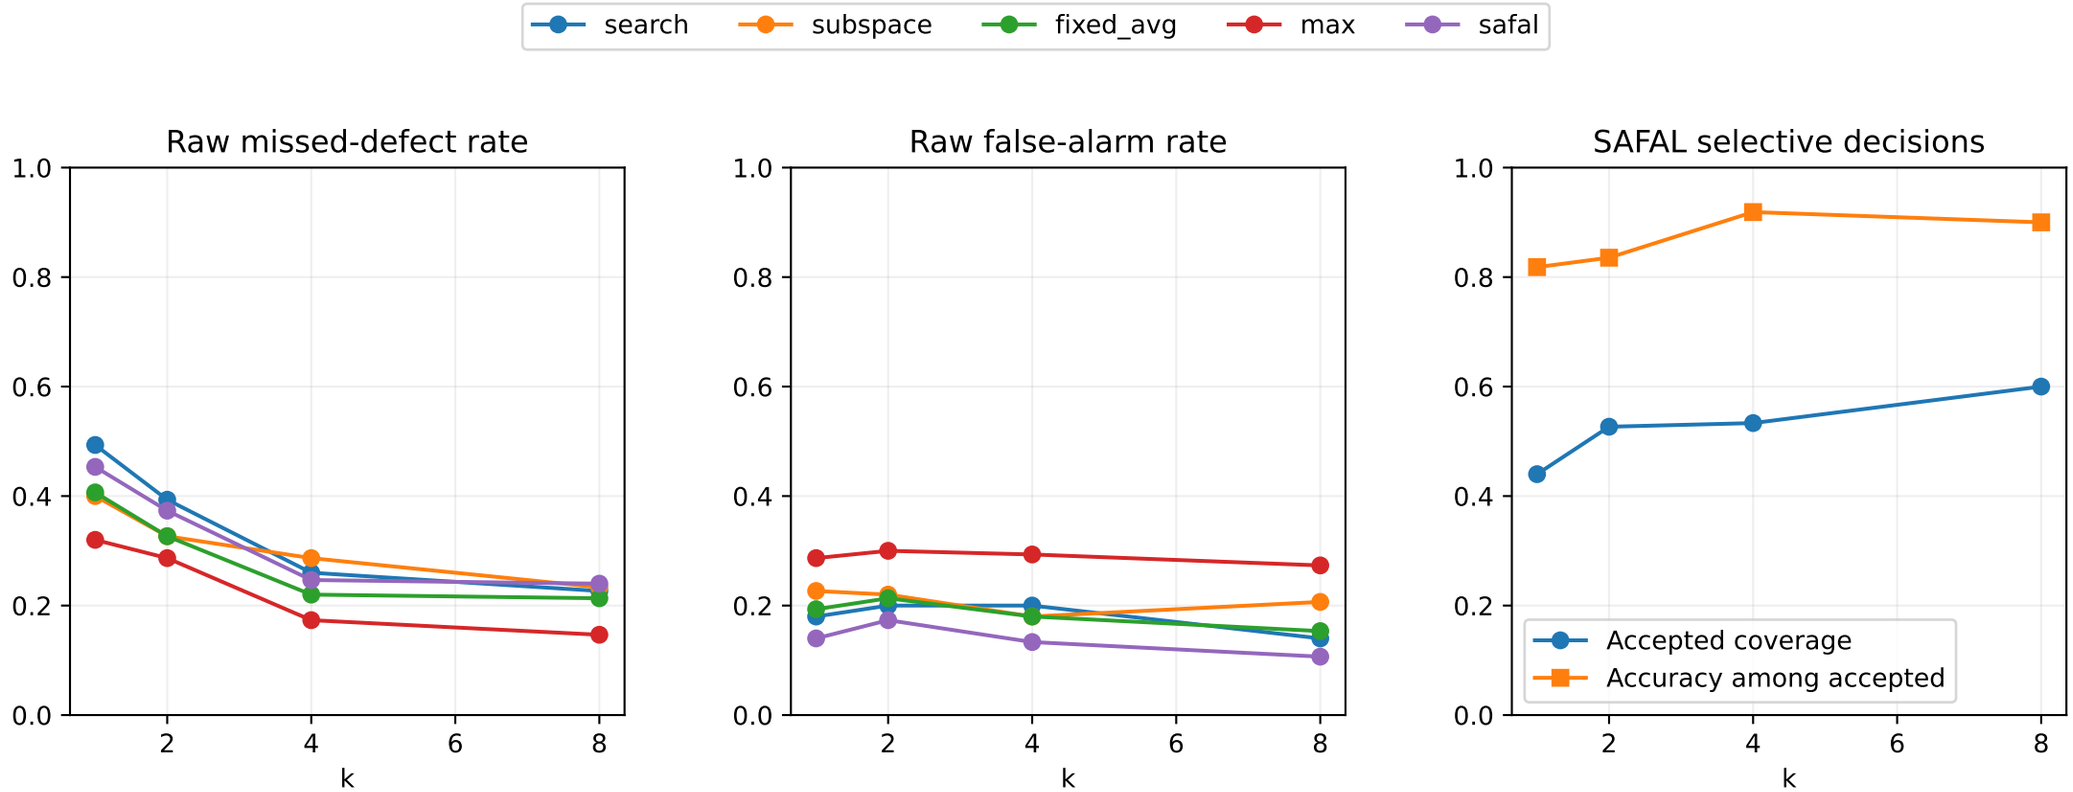

Development validation; fixed sampled categories and fitted head. Queries recur across support draws and nested k. No independent-row or pixel confidence intervals. Accepted accuracy always accompanies retained coverage.