



## Section 2, Lecture 4

Go to Dashboard

```
MacBook-Pro-3:devcamp-tutorials admin$ rails new Overtime --database=postgresql
```

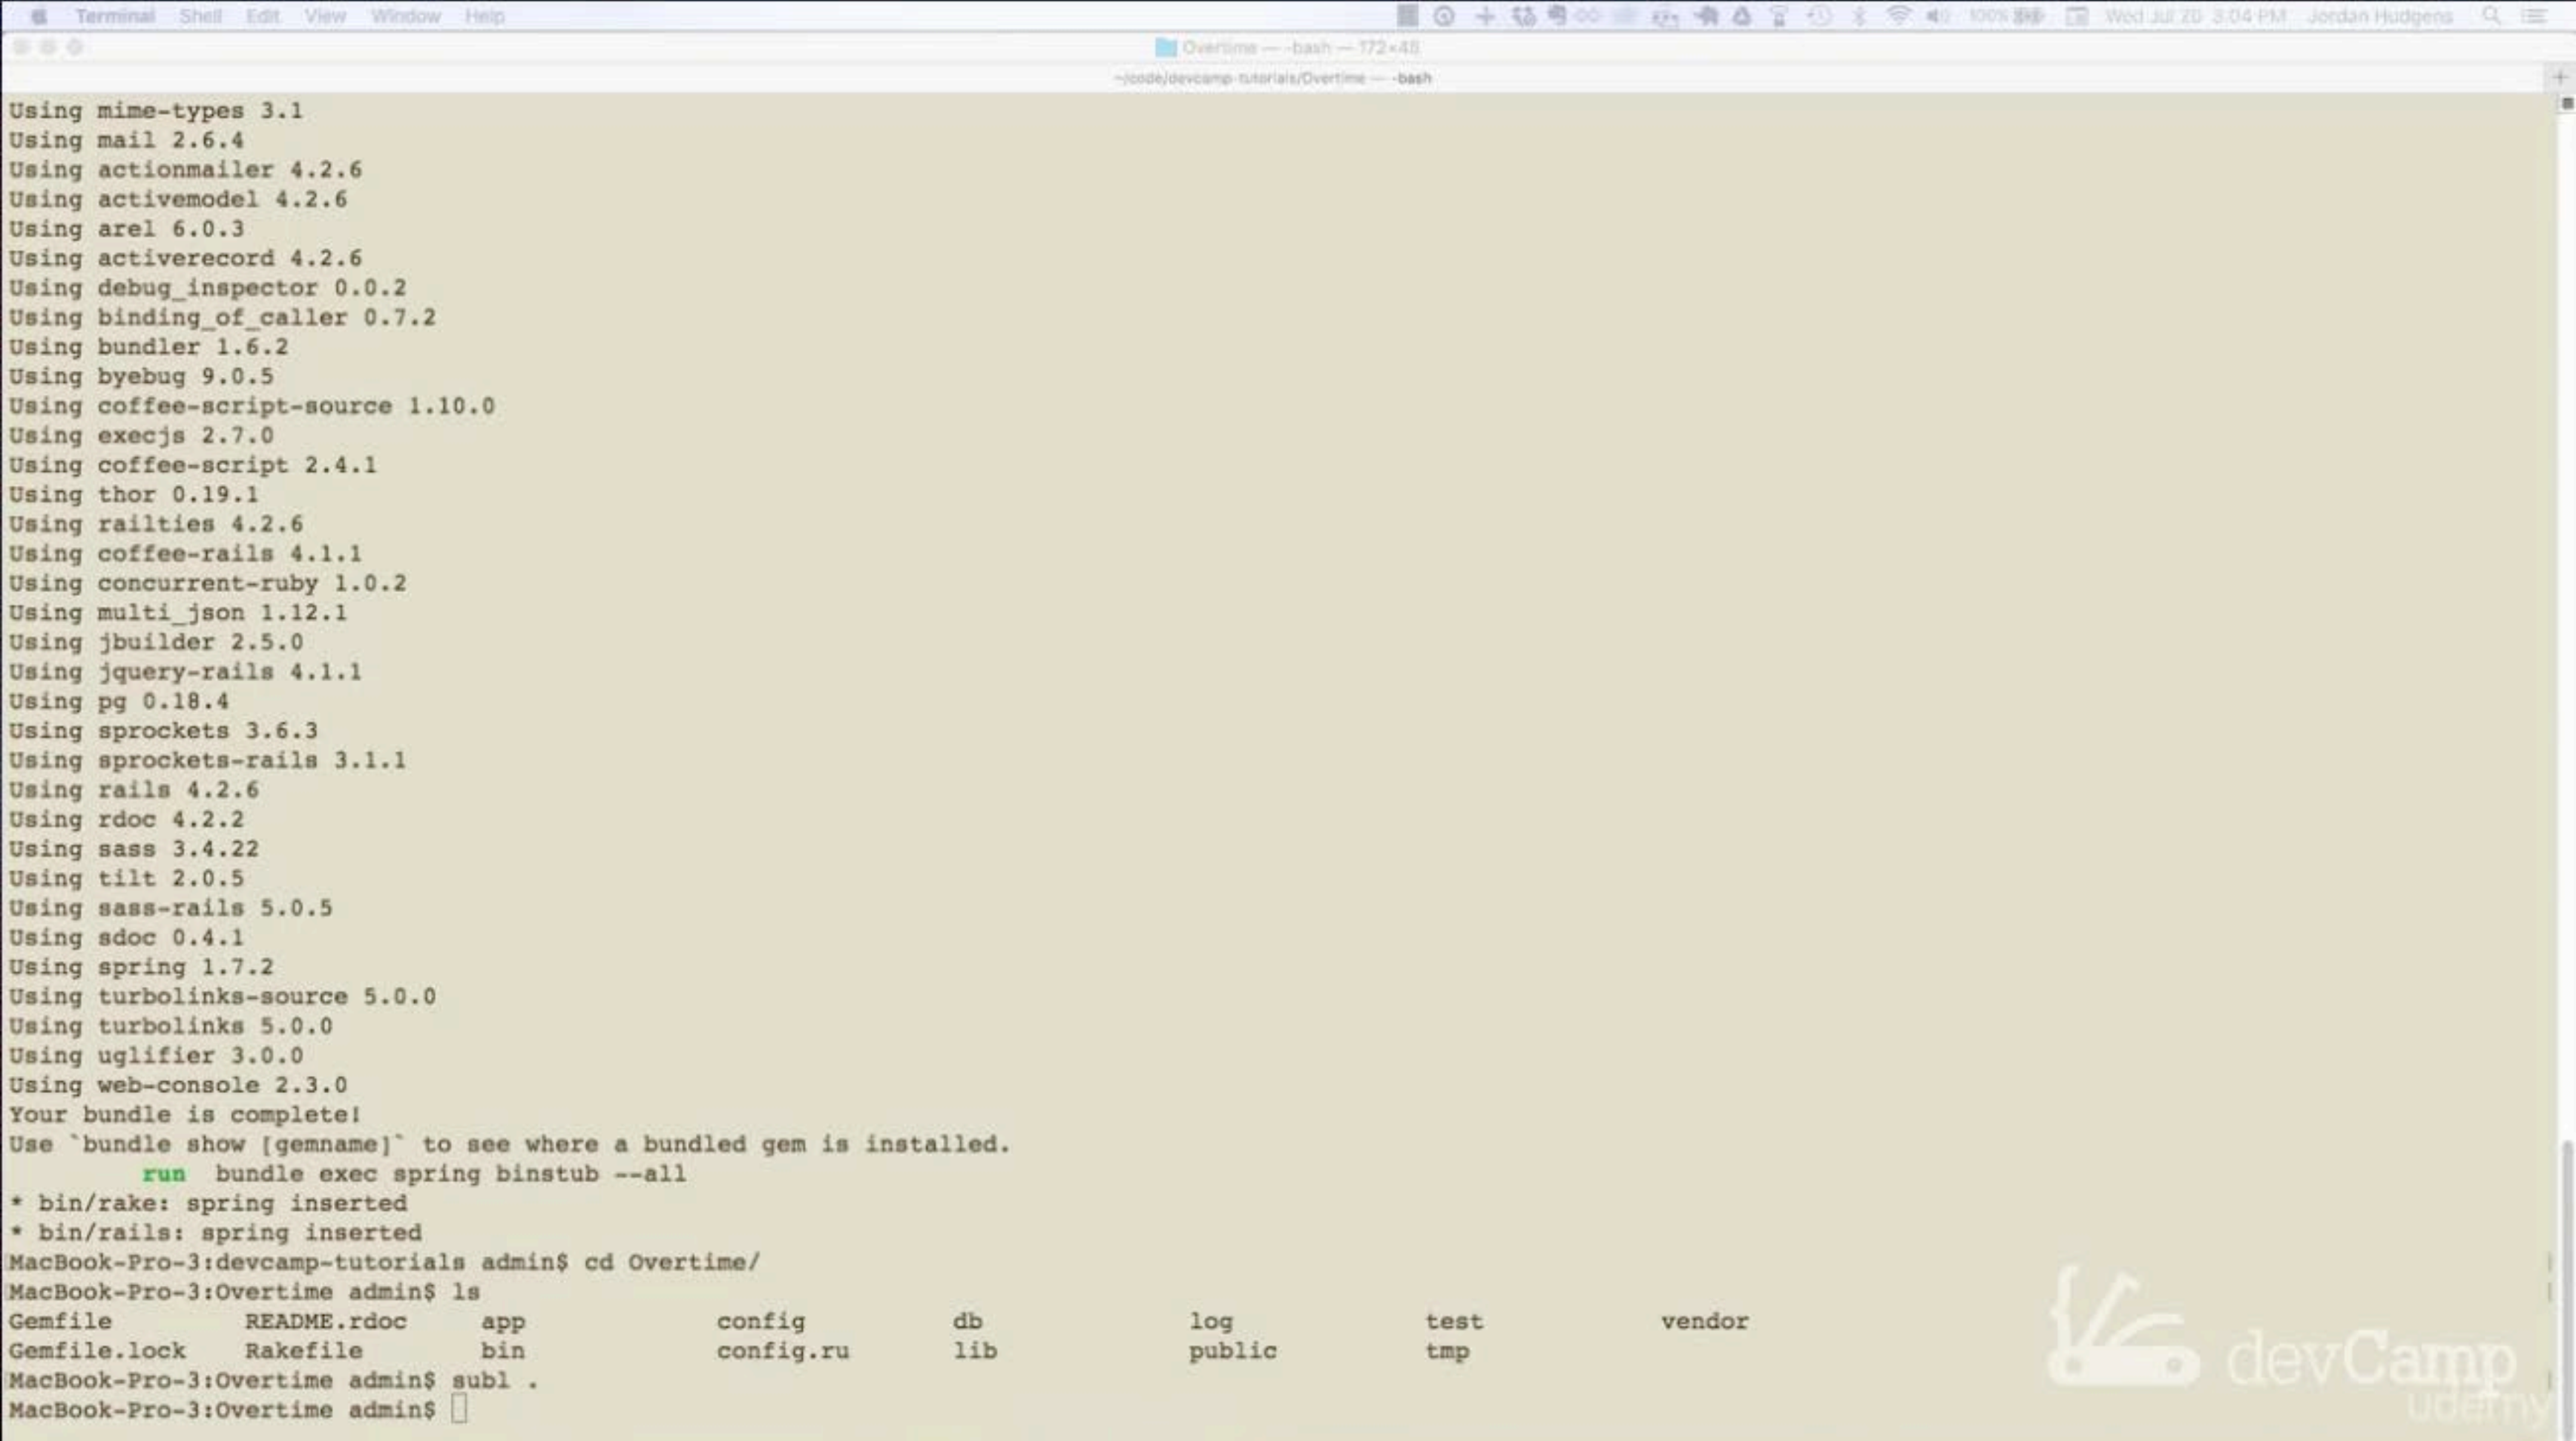

```
Using mime-types 3.1
Using mail 2.6.4
Using actionmailer 4.2.6
Using activemodel 4.2.6
Using arel 6.0.3
Using activerecord 4.2.6
Using debug_inspector 0.0.2
Using binding_of_caller 0.7.2
Using bundler 1.6.2
Using byebug 9.0.5
Using coffee-script-source 1.10.0
Using execjs 2.7.0
Using coffee-script 2.4.1
Using thor 0.19.1
Using railties 4.2.6
Using coffee-rails 4.1.1
Using concurrent-ruby 1.0.2
Using multi_json 1.12.1
Using jbuilder 2.5.0
Using jquery-rails 4.1.1
Using pg 0.18.4
Using sprockets 3.6.3
Using sprockets-rails 3.1.1
Using rails 4.2.6
Using rdoc 4.2.2
Using sass 3.4.22
Using tilt 2.0.5
Using sass-rails 5.0.5
Using sdock 0.4.1
Using spring 1.7.2
Using turbolinks-source 5.0.0
Using turbolinks 5.0.0
Using uglifier 3.0.0
Using web-console 2.3.0
Your bundle is complete!
Use `bundle show [gemname]` to see where a bundled gem is installed.
    run bundle exec spring binstub --all
* bin/rake: spring inserted
* bin/rails: spring inserted
MacBook-Pro-3:devcamp-tutorials admin$ cd Overtime/
MacBook-Pro-3:Overtime admin$ ls
Gemfile      README.rdoc  app          config       db            log           test          vendor
Gemfile.lock Rakefile     bin          config.ru    lib           public        tmp
MacBook-Pro-3:Overtime admin$ subl .
MacBook-Pro-3:Overtime admin$
```

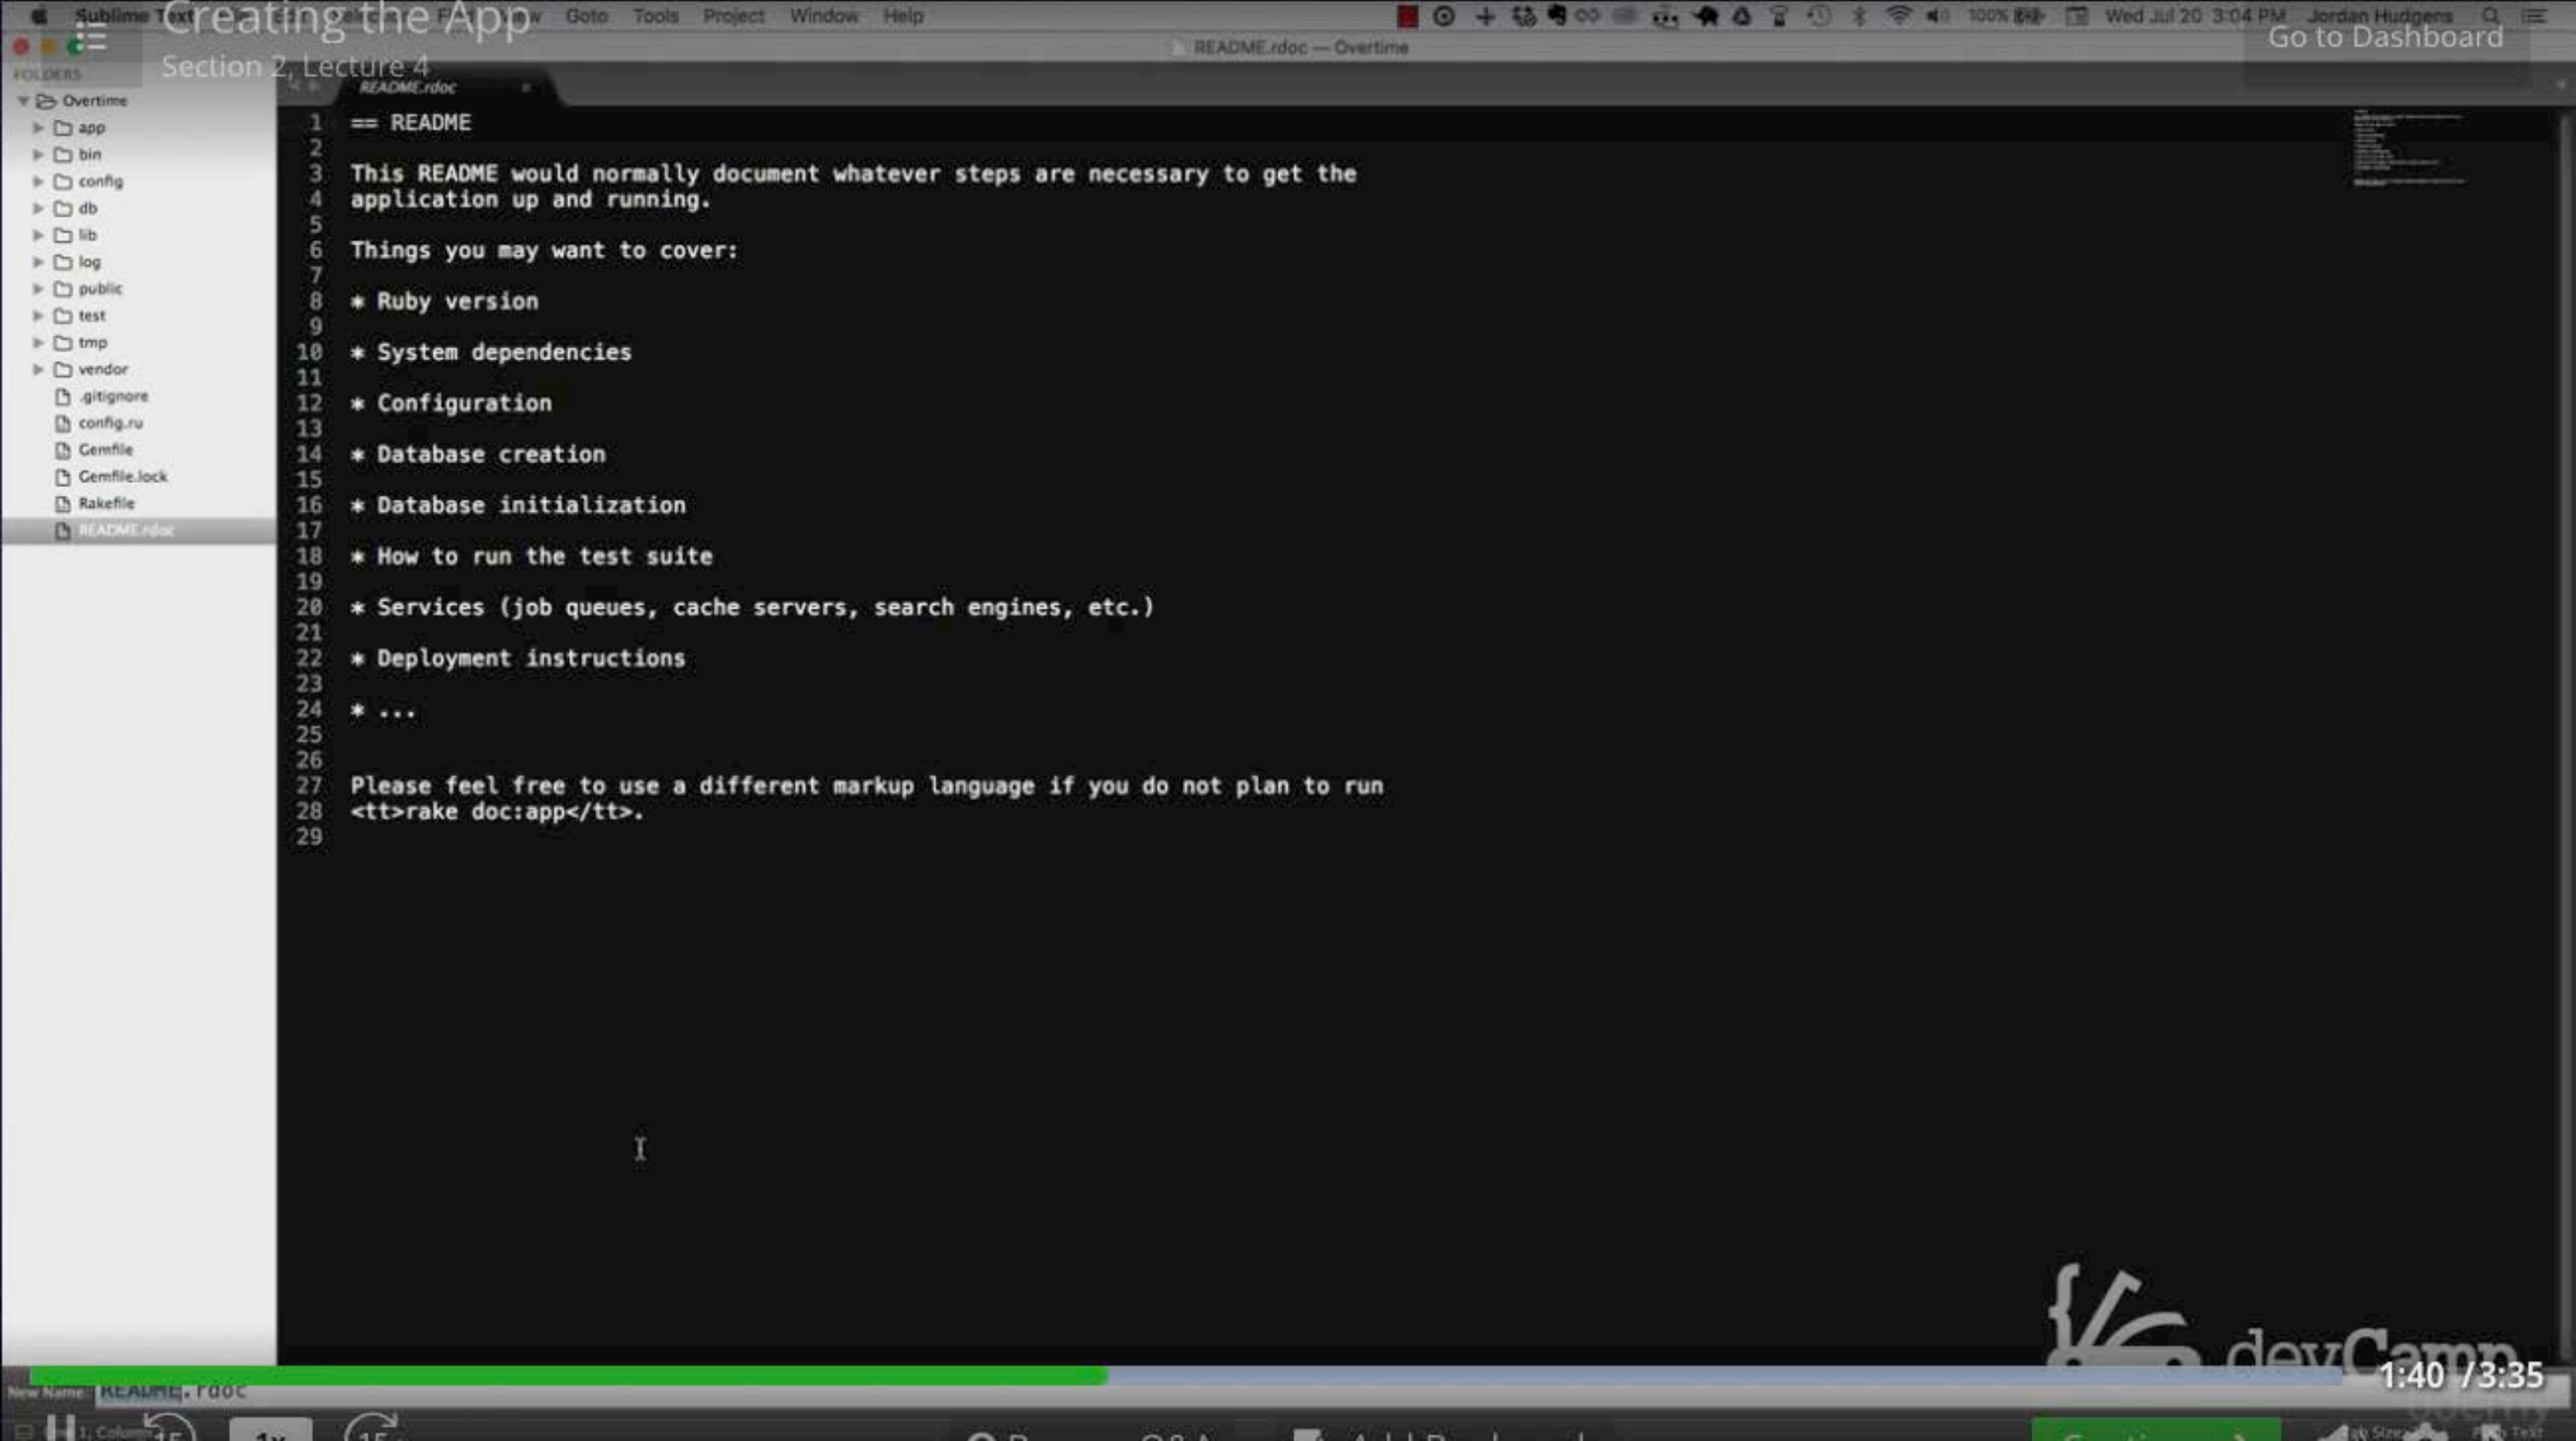


# Creating the App

## Section 2, Lecture 4

[Go to Dashboard](#)

```
1 == README
2
3 This README would normally document whatever steps are necessary to get the
4 application up and running.
5
6 Things you may want to cover:
7
8 * Ruby version
9
10 * System dependencies
11
12 * Configuration
13
14 * Database creation
15
16 * Database initialization
17
18 * How to run the test suite
19
20 * Services (job queues, cache servers, search engines, etc.)
21
22 * Deployment instructions
23
24 * ...
25
26
27 Please feel free to use a different markup language if you do not plan to run
28 <tt>rake doc:app</tt>.
29
```

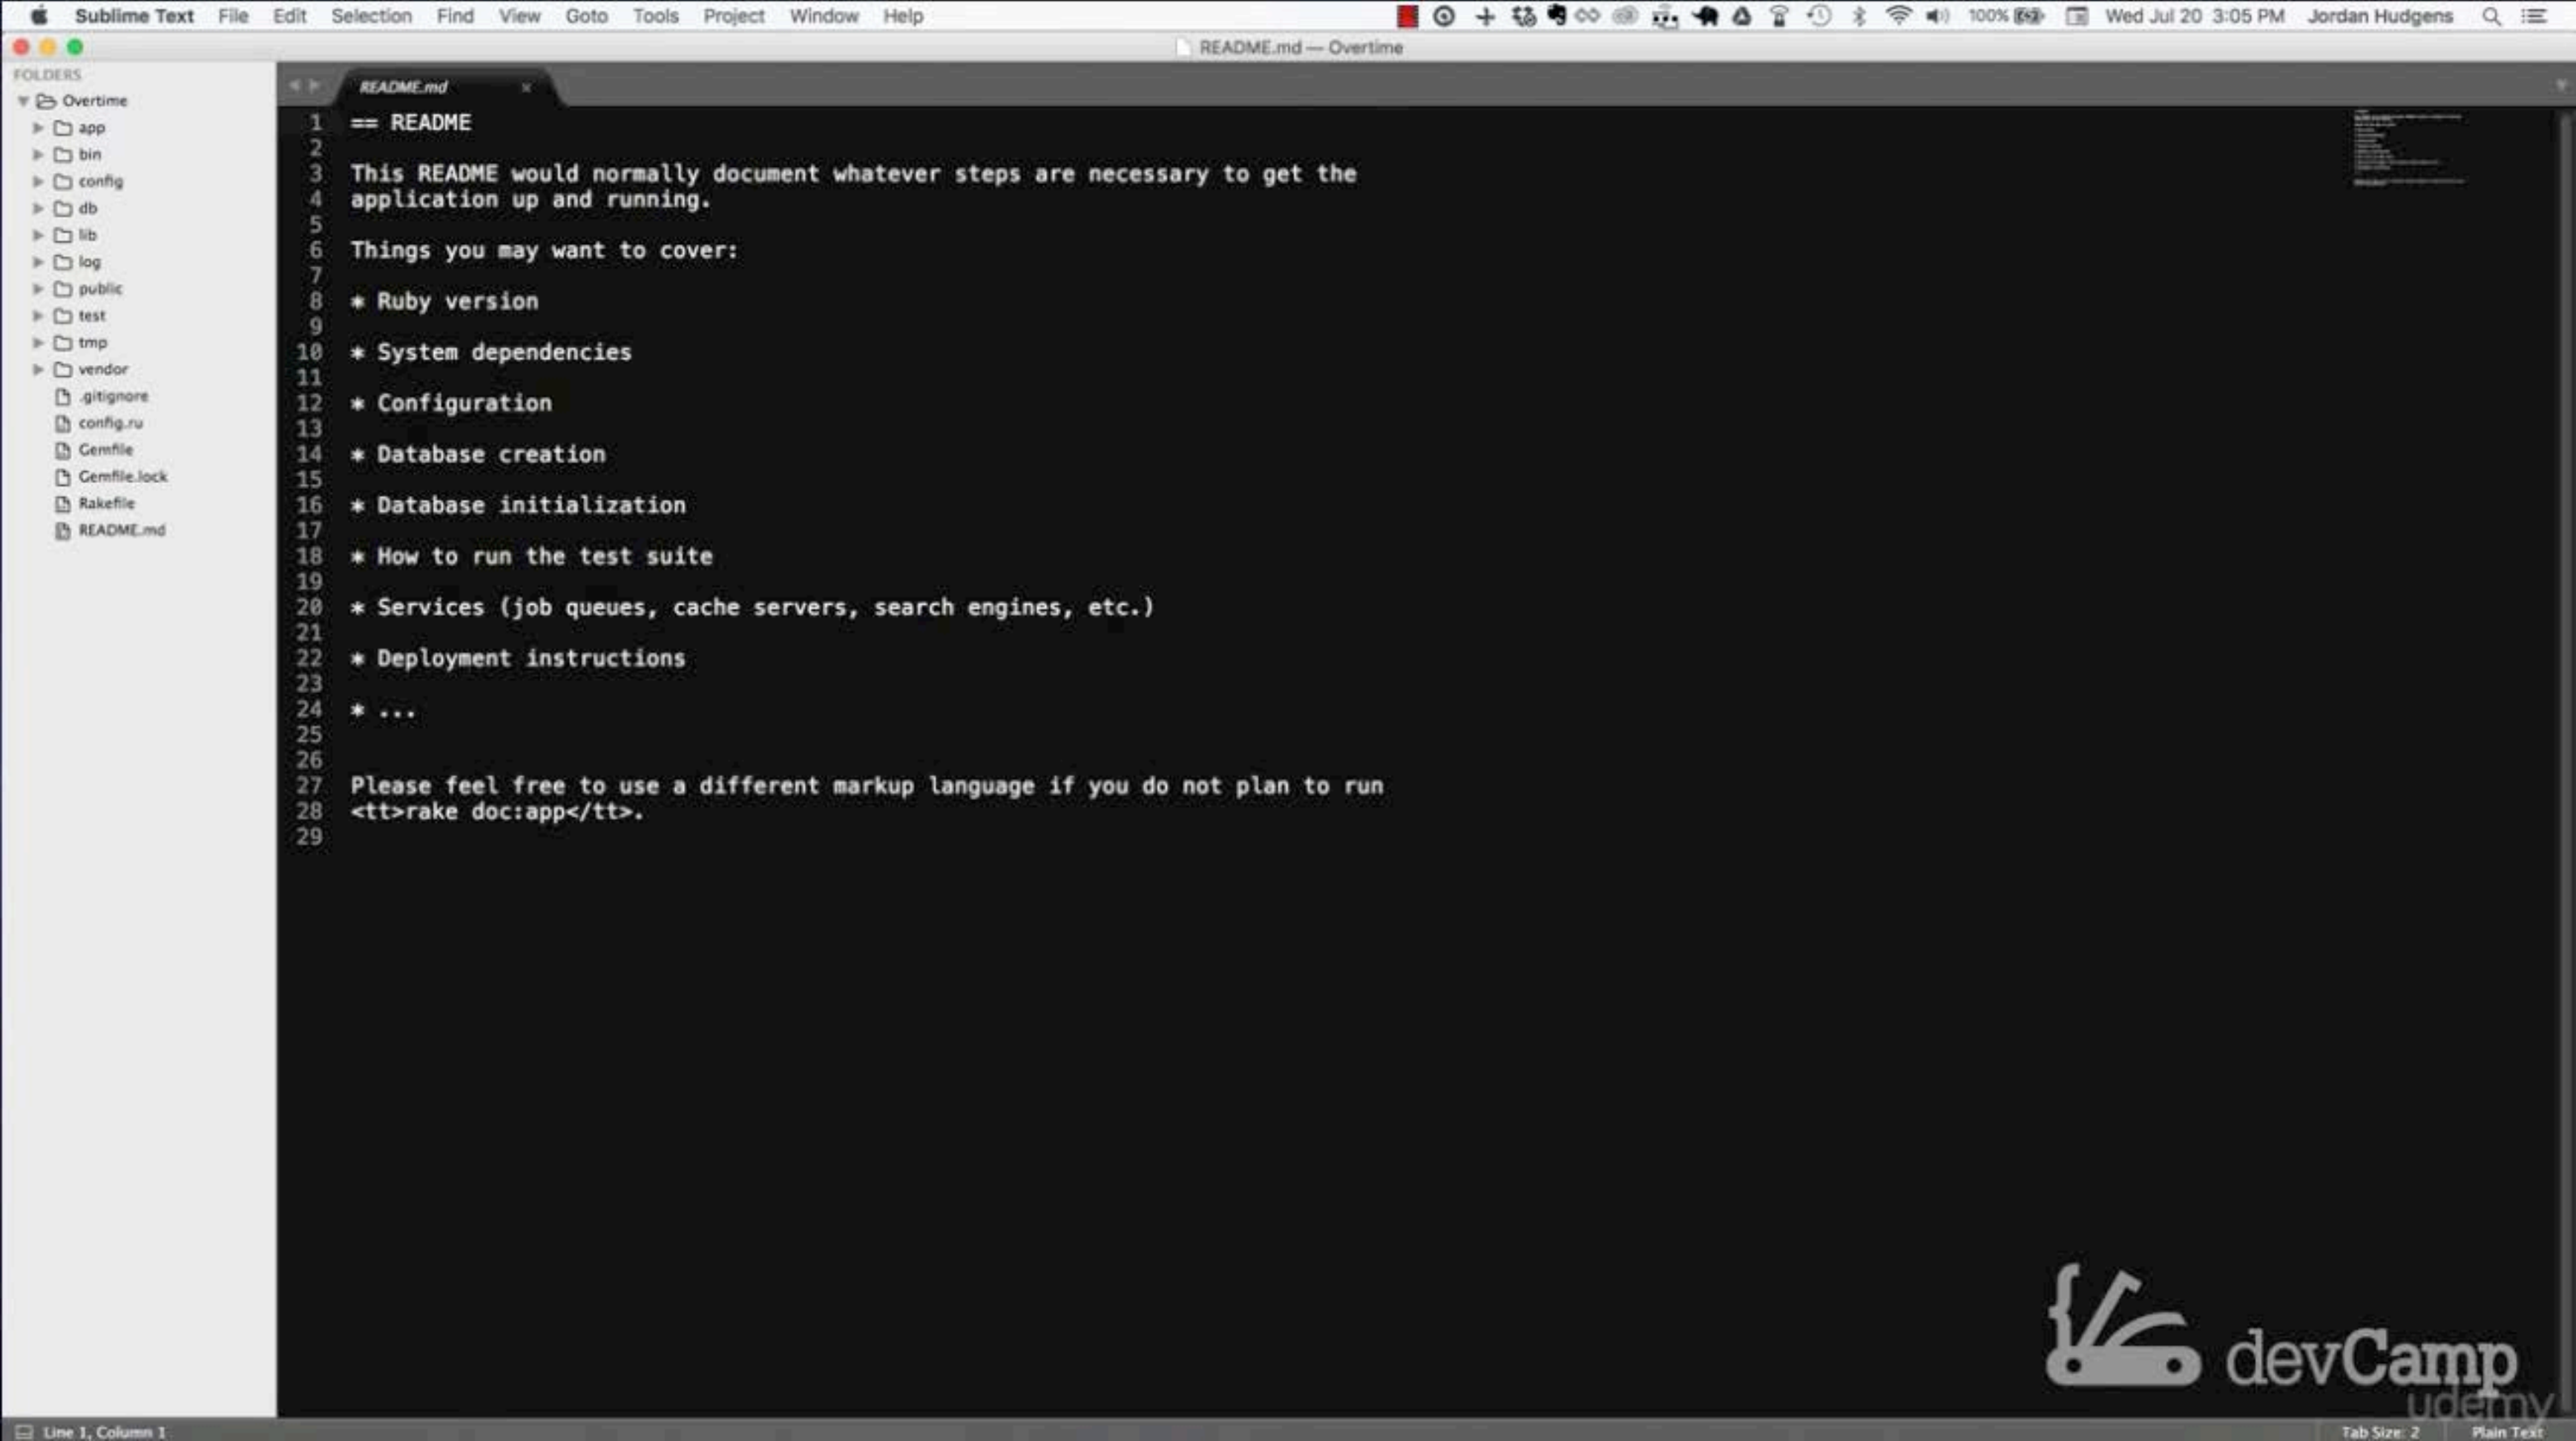



Sublime TextFileEditSelectionFindViewGotoToolsProjectWindowHelp

README.md — Overtime

FOLDERS

Overtime

app

bin

config

db

lib

log

public

test

tmp

vendor

.gitignore

config.ru

Gemfile

Gemfile.lock

Rakefile

README.md

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

# Overtime App

## Key requirement: company needs documentation that salaried employees did or did not get overtime each week

## Models

- Post -> date:date rationale:text

- User -> Devise

- AdminUser -> STI

## Features:

- Approval Workflow

- SMS Sending -> link to approval or overtime input


- Administrate admin dashboard

- Email summary to managers for approval

- Needs to be documented if employee did not log overtime

## UI:

Bootstrap -> formatting

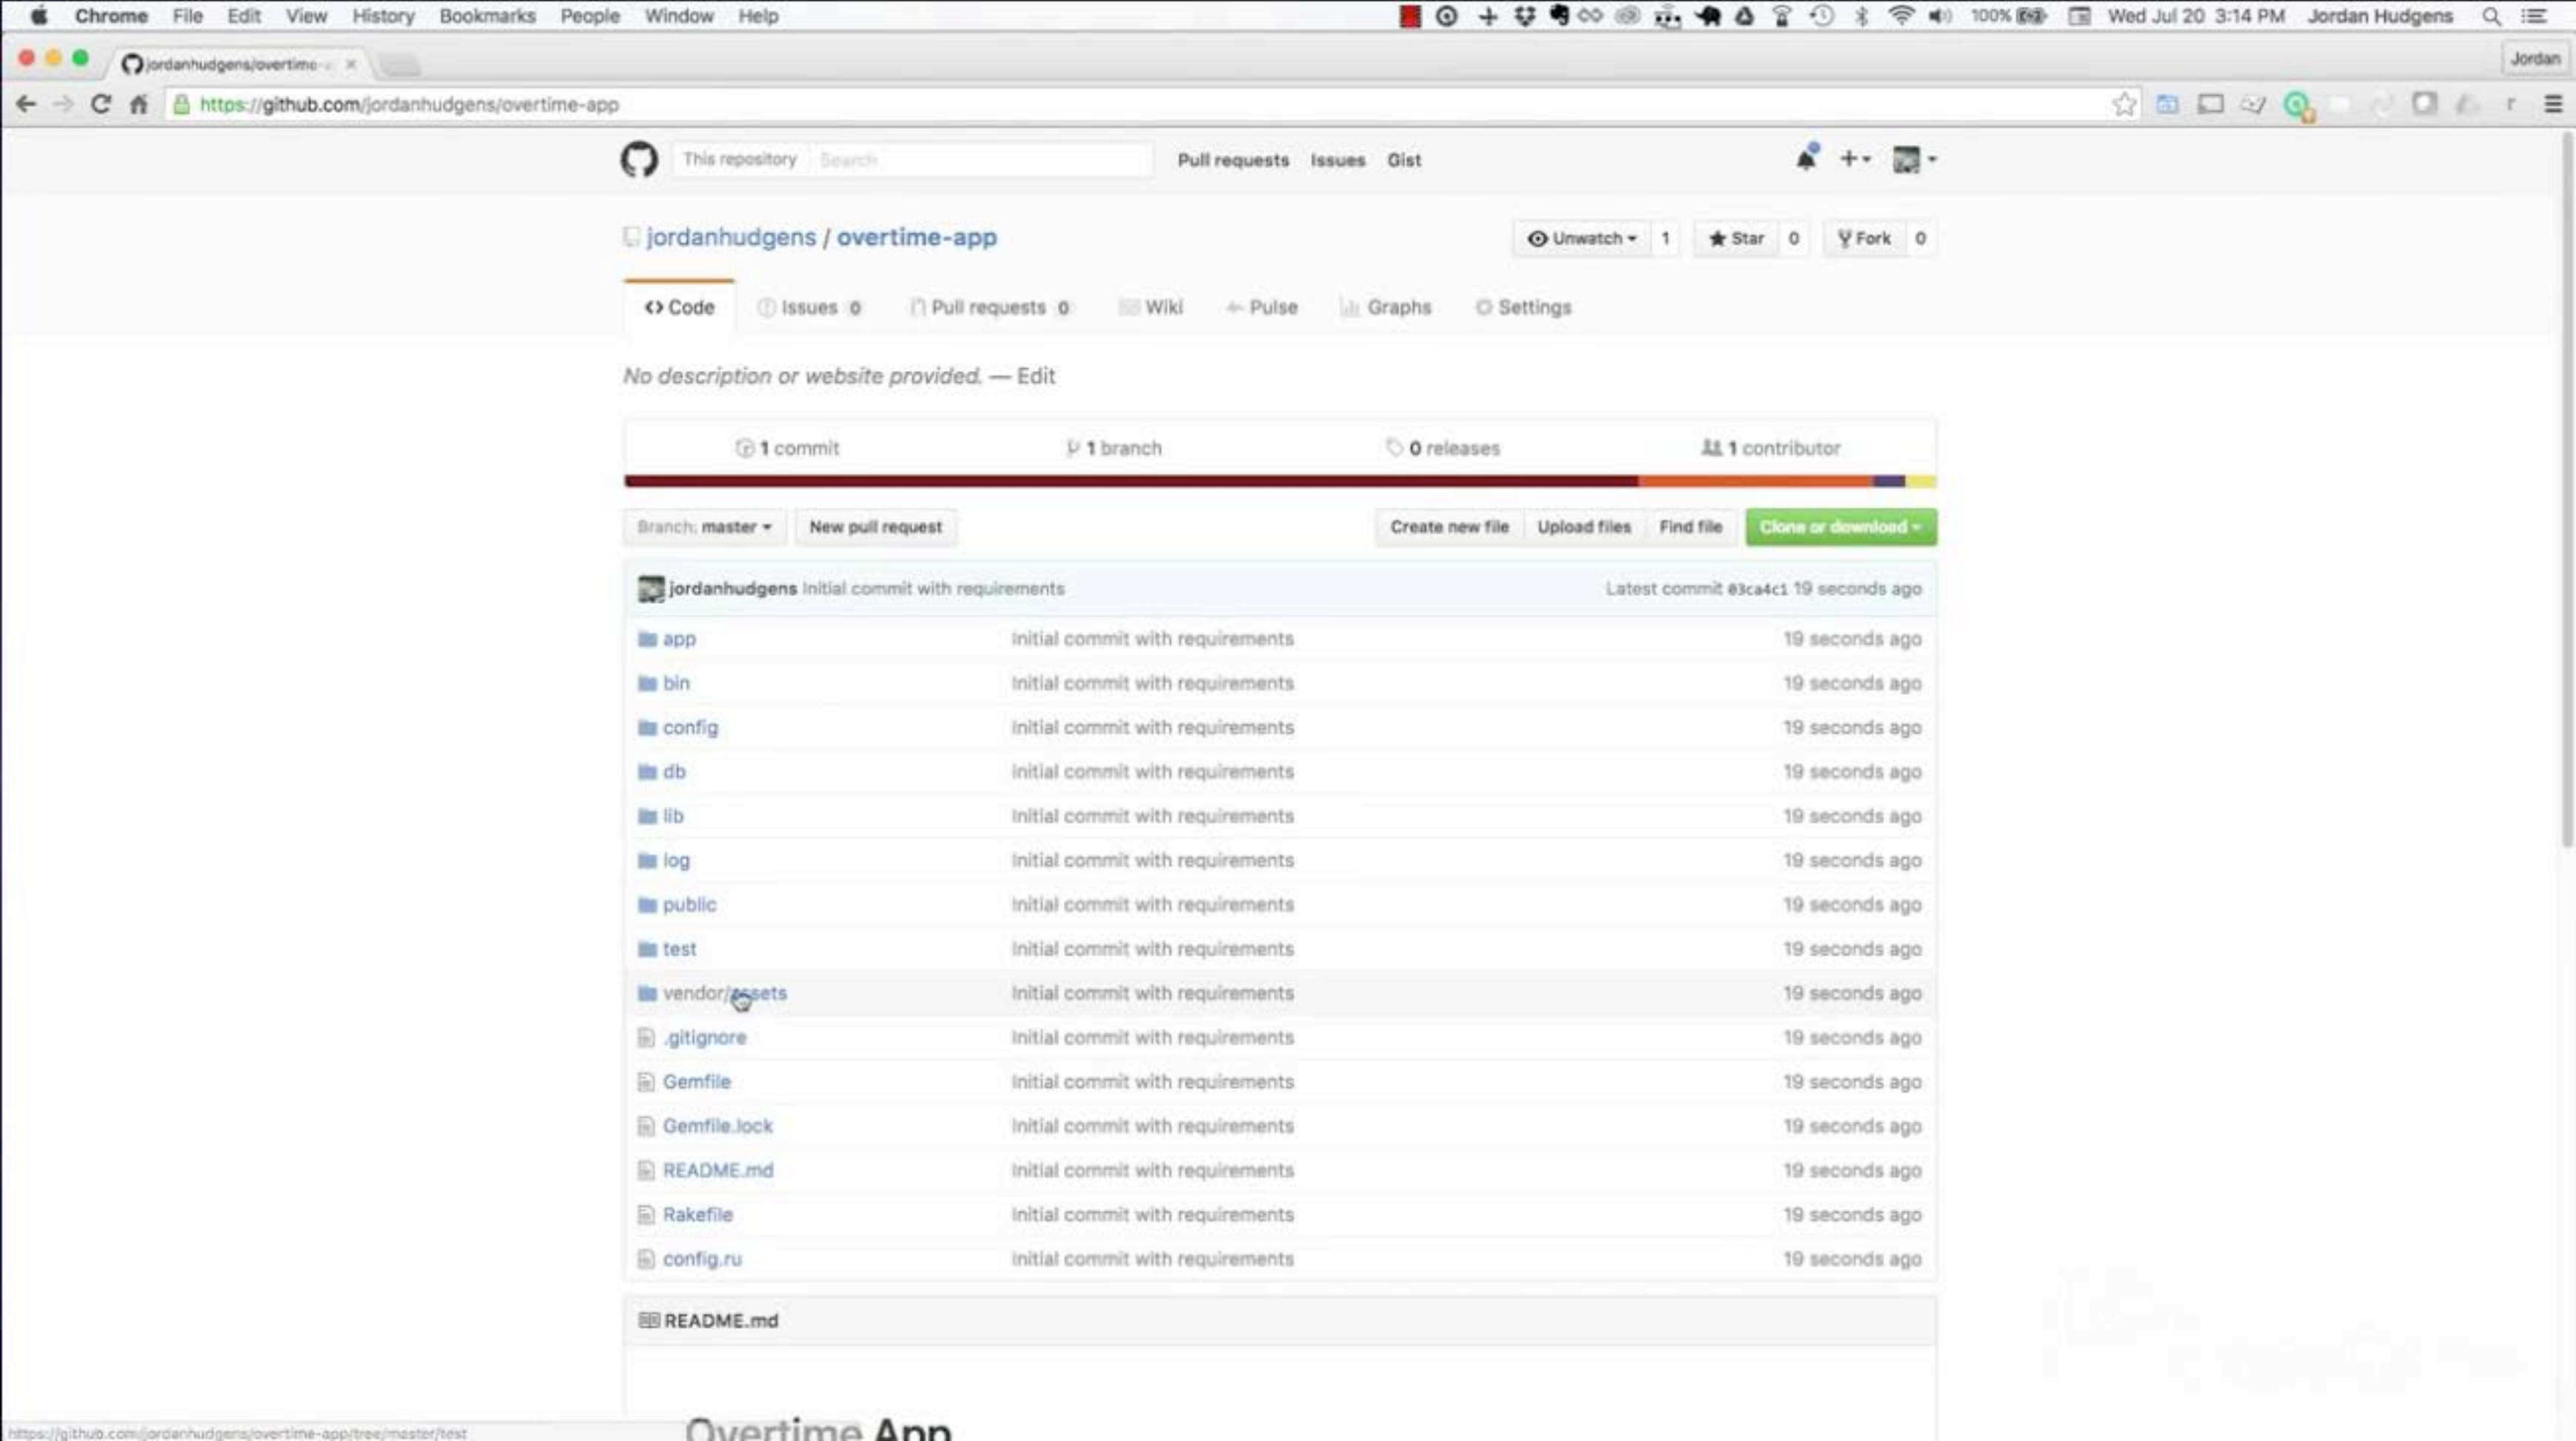

 Rakefile	Initial commit with requirements	19 seconds ago
 config.ru	Initial commit with requirements	19 seconds ago

 README.md

## Overtime App

**Key requirement: company needs documentation that salaried employees did or did not get overtime each week**

## Models

- Post -> date:date rationale:text
- User -> Devise
- AdminUser -> STI

### Features:

- Approval Workflow
- SMS Sending -> link to approval or overtime input
- Administrate admin dashboard
- Email summary to managers for approval
- Needs to be documented if employee did not log overtime

## UI:

Bootstrap -> formatting

ChromeFileEditViewHistoryBookmarksPeopleWindowHelp

jordanhudsonsovertime x Rails App Configuration

https://rails.devcamp.com/professional-rails-development-course/application-build/rails-app-configuration

Search Camp Files

Jordan Hudgens

TwitterGoogle PlusTumblr

WelcomeJordan HudgensProfileEdit

NAVIGATE

Syllabus

Trails

Org Dashboard

Revenue Dashboard

Latest Lesson

Subscription

Schedule

Subscribe to our Rails Newsletter

email address

Subscribe

Rails App Configuration

Professional Rails DevelopmentInitial Application BuildJordan HudgensEditMark Completed

This training guide assumes that you have already completed the Rails Foundations course, so we will not cover some of the basic fundamentals of the Ruby on Rails framework since I want the focus to be on building an application in the same way that you'd build one in a professional environment.

With that out of the way, let's get started!

The goal of this guide will be to:

- Run the app generator
- Configure the database
- Setup version control
- Integrate the RSpec and Capybara testing gems

Rails Application Generator

To begin, run the following command to create the application:

rails new dailysmarty -T --database=postgresql

Configure the database

This will create the application and bypass installing the default testing package. It will also set Postgres as the default database since I'm not really a fan of ever using SQLite since it can have some different behavior than Postgres, especially in regard to error forgiveness.

Now run rake db:create && rake db:migrate to create the local database.

Setup version control


With that setup, let's setup git version control, run:

git initgit add .git ci -m 'initial commit'

Now let's create a remote repo on GitHub and add it as a remote so we can push to it and eventually use it as the gateway for our deployment workflow (but more on that later).







Welcome  
Jordan Hudgens

Profile Edit

#### NAVIGATE

Syllabus

Trails

Org Dashboard

Revenue Dashboard

Latest Lesson

Subscription

Schedule

Subscribe to our Rails  
Newsletter

Subscribe

## RSpec Integration

Lastly for this step, let's add the full RSpec testing suite. In addition to the `rspec-rails` gem we're also going to integrate:

- **Capybara** - this will let us create integration tests that will mimic user behavior and browser actions such as clicking on a link, filling out a form, etc.
- **Database Cleaner** - this helpful library will clean up our test database to protect us against spec errors such as records not getting created due to uniqueness validations.
- **Factory Girl** - with Factory Girl installed we can dynamically create sample database records and use them in our specs

I have a standard testing setup for the majority of applications I build and we're going to follow the same pattern (this will bring in three gems, if you want to see an implementation that only has RSpec you can checkout my [RSpec tutorial](#)). First, let's add in the Gems and group them in the correct Gem group (it wouldn't make sense to have the Gems available on production), I'm also going to clean up the entire Gemfile so it looks nice and clean. After you're done the Gemfile should look like this:

```
# Gemfile

source 'https://rubygems.org'

gem 'rails', '4.2.5'
gem 'pg', '~> 0.15'
gem 'sass-rails', '~> 5.0'
gem 'uglifier', '>= 1.3.0'
gem 'coffee-rails', '~> 4.1.0'
gem 'jquery-rails'
gem 'turbolinks'
gem 'jbuilder', '~> 2.0'
gem 'sdoc', '~> 0.4.0', group: :doc

group :development, :test do
  gem 'byebug'
  gem 'rspec-rails', '~> 3.0'
  gem 'capybara'
  gem 'database_cleaner'
end

group :development do
  gem 'web-console', '~> 2.0'
  gem 'spring'
end
```

I removed the comments and added the testing gems in the `:development, :test` block:

```
gem 'rspec-rails', '~> 3.0'
gem 'capybara'
gem 'database_cleaner'
```

After running `bundle` we will have access to the new testing libraries. Now let's run the `RSpec` installer:

```
rails generate rspec:install
```

That will create our testing configuration files and setup the app's `spec` directory. Let's customize the `rails_helper.rb` file so that it will work with `capybara` and `DatabaseCleaner`:



Section 2, Lecture 6

Resources available

FOLDERS

Overtime

app

bin

config

db

lib

log

public

test

tmp

vendor

.gitignore

config.ru

Gemfile

Gemfile.lock

Rakefile

README.md

Gemfile — Overtime

1 source 'https://rubygems.org'

2

3

4 # Bundle edge Rails instead: gem 'rails', github: 'rails/rails'

5 gem 'rails', '4.2.6'

6 # Use postgresql as the database for Active Record

7 gem 'pg', '~> 0.15'

8 # Use SCSS for stylesheets

9 gem 'sass-rails', '~> 5.0'

10 # Use Uglifier as compressor for JavaScript assets

11 gem 'uglifier', '>= 1.3.0'

12 # Use CoffeeScript for .coffee assets and views

13 gem 'coffee-rails', '~> 4.1.0'

14 # See https://github.com/rails/execjs#readme for more supported runtimes

15 # gem 'therubyracer', platforms: :ruby

16

17 # Use jquery as the JavaScript library

18 gem 'jquery-rails'

19 # Turbolinks makes following links in your web application faster. Read more: https://github.com/rails/turbolinks

20 gem 'turbolinks'

21 # Build JSON APIs with ease. Read more: https://github.com/rails/jbuilder

22 gem 'jbuilder', '~> 2.0'

23 # bundle exec rake doc:rails generates the API under doc/api.

24 gem 'sdoc', '~> 0.4.0', group: :doc

25

26 # Use ActiveModel has\_secure\_password

27 # gem 'bcrypt', '~> 3.1.7'

28

29 # Use Unicorn as the app server

30 # gem 'unicorn'

31

32 # Use Capistrano for deployment

33 # gem 'capistrano-rails', group: :development

34

35 group :development, :test do

36 gem 'byebug'

37 gem 'rspec-rails', '~> 3.0'

38 gem 'capybara'

39 gem 'database\_cleaner'

40 end

41

42 group :development do

43 # Access an IRB console on exception pages or by using <%= console %> in views

44 gem 'web-console', '~> 2.0'

45


46 # Spring speeds up development by keeping your application running in the background. Read more: https://github.com/rails/spring

47 gem 'spring'


48 end

49

50

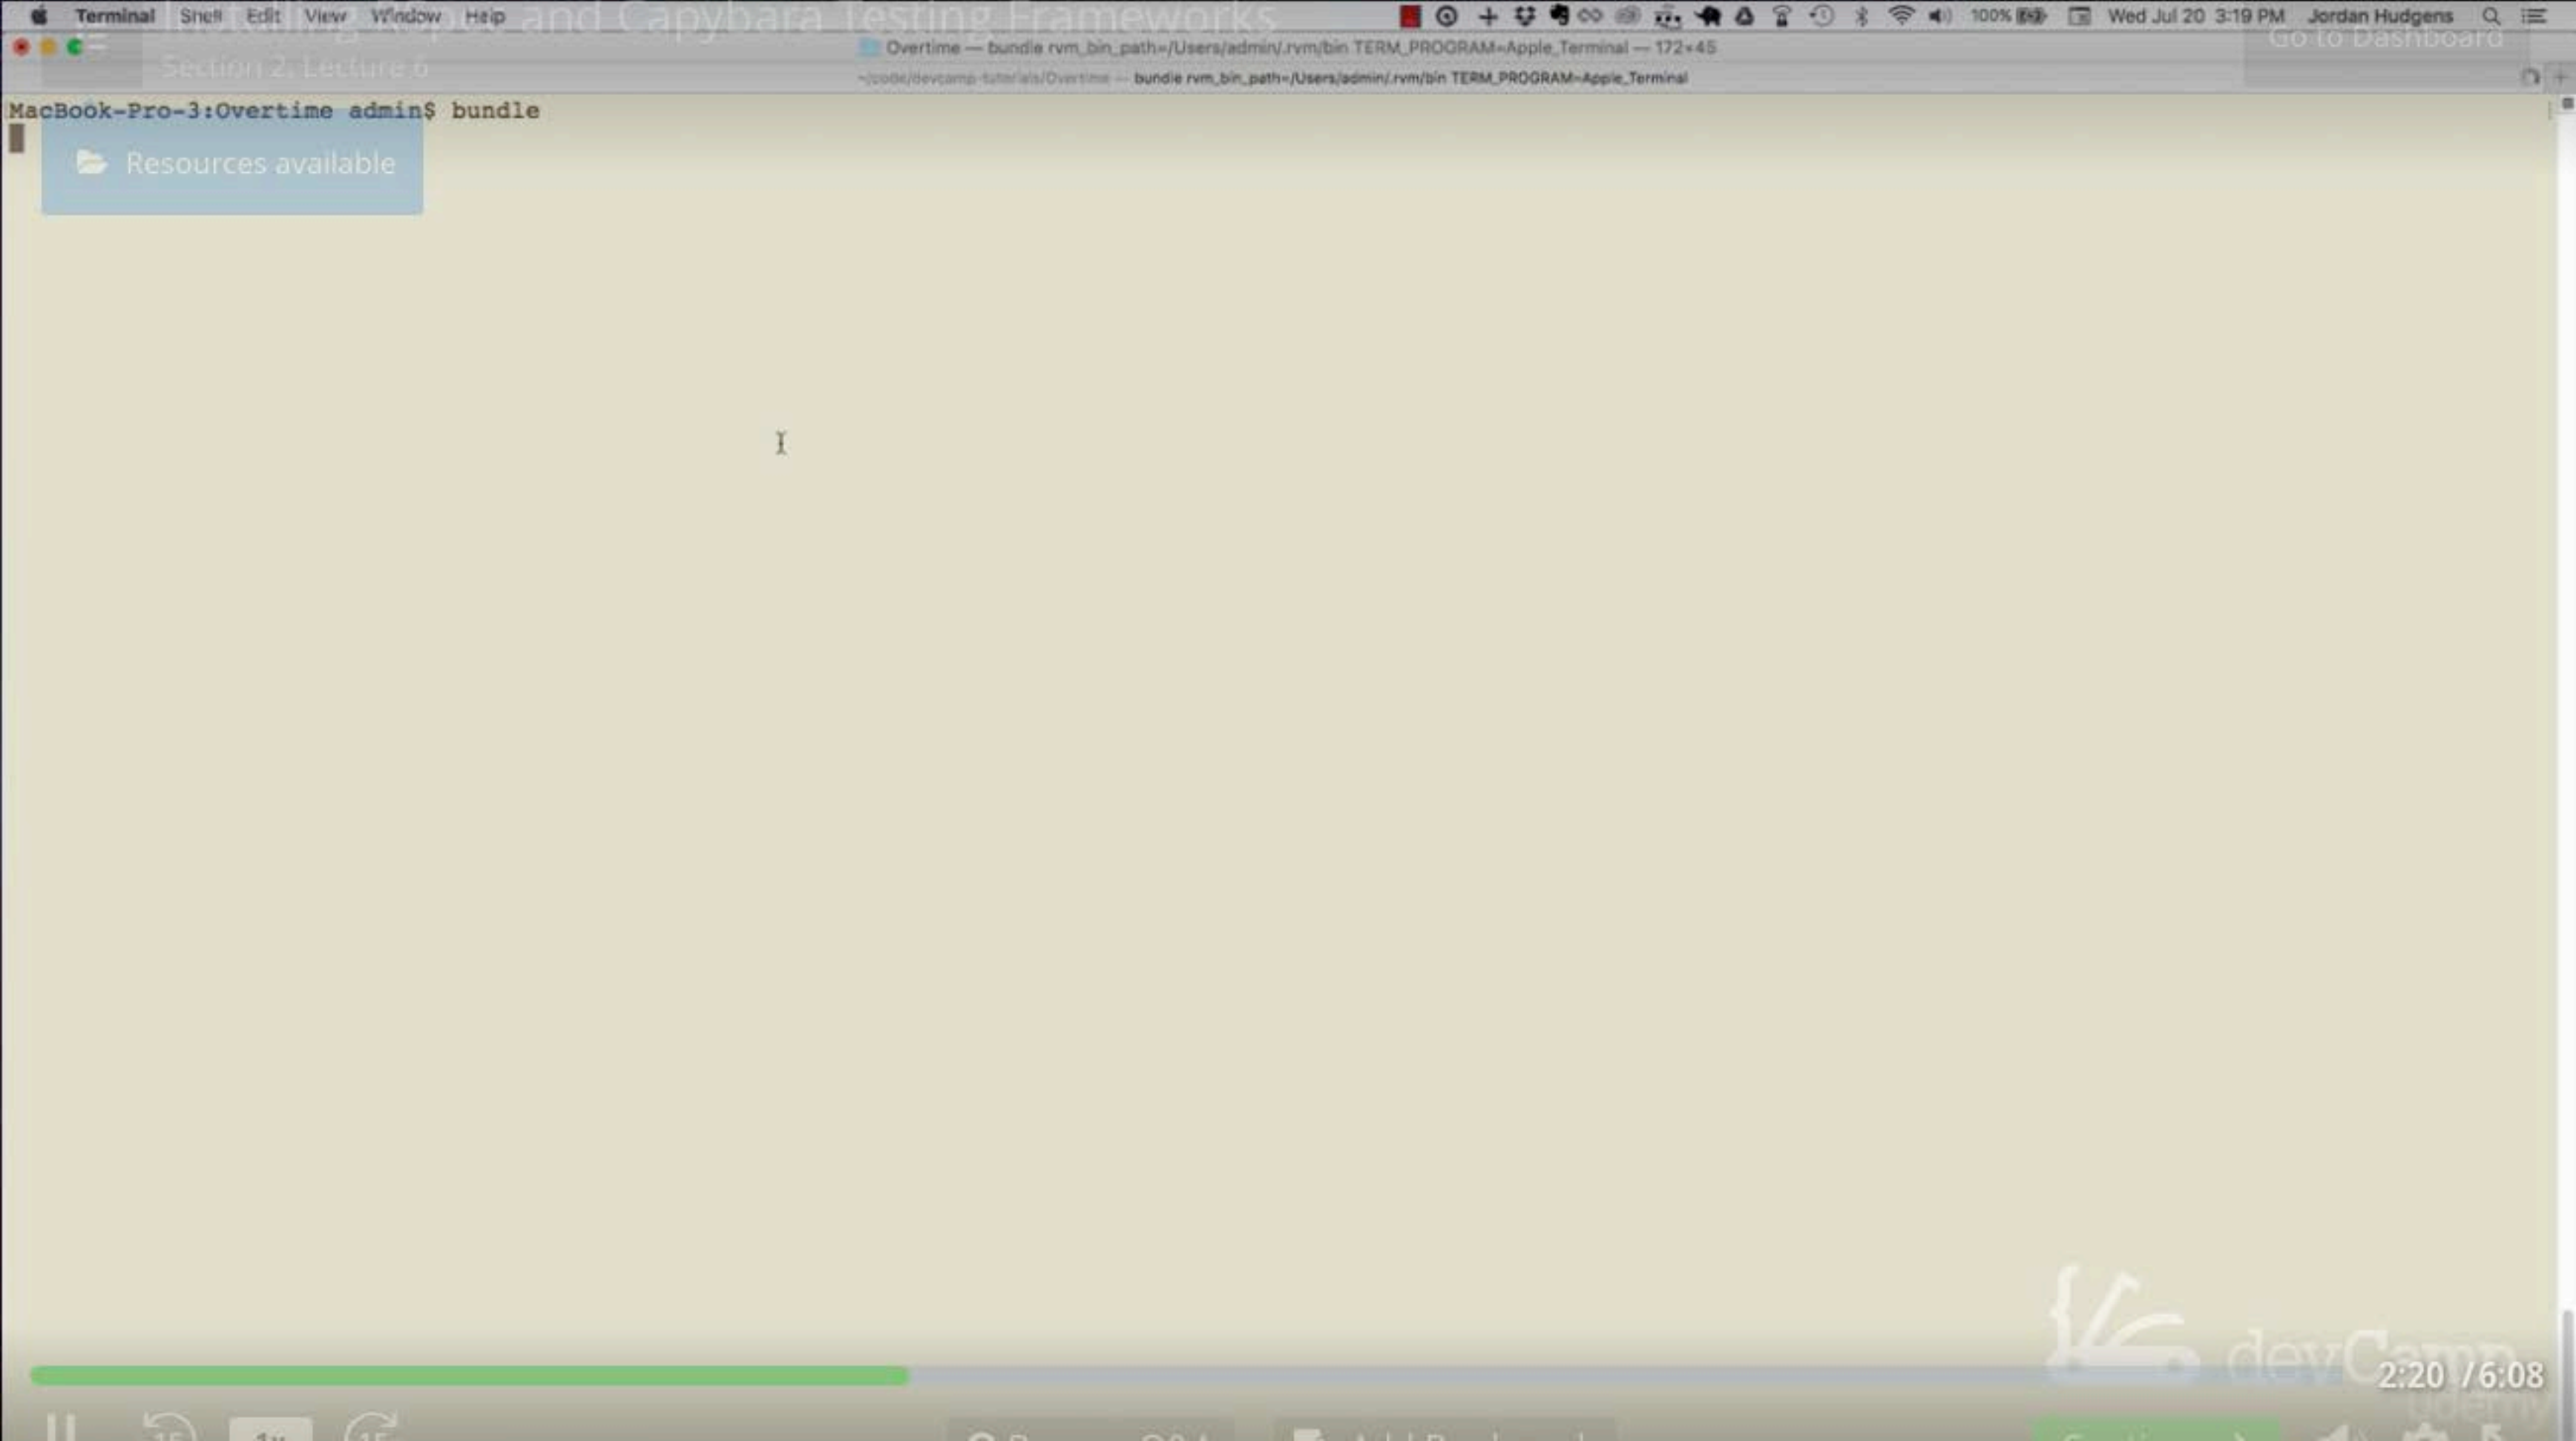



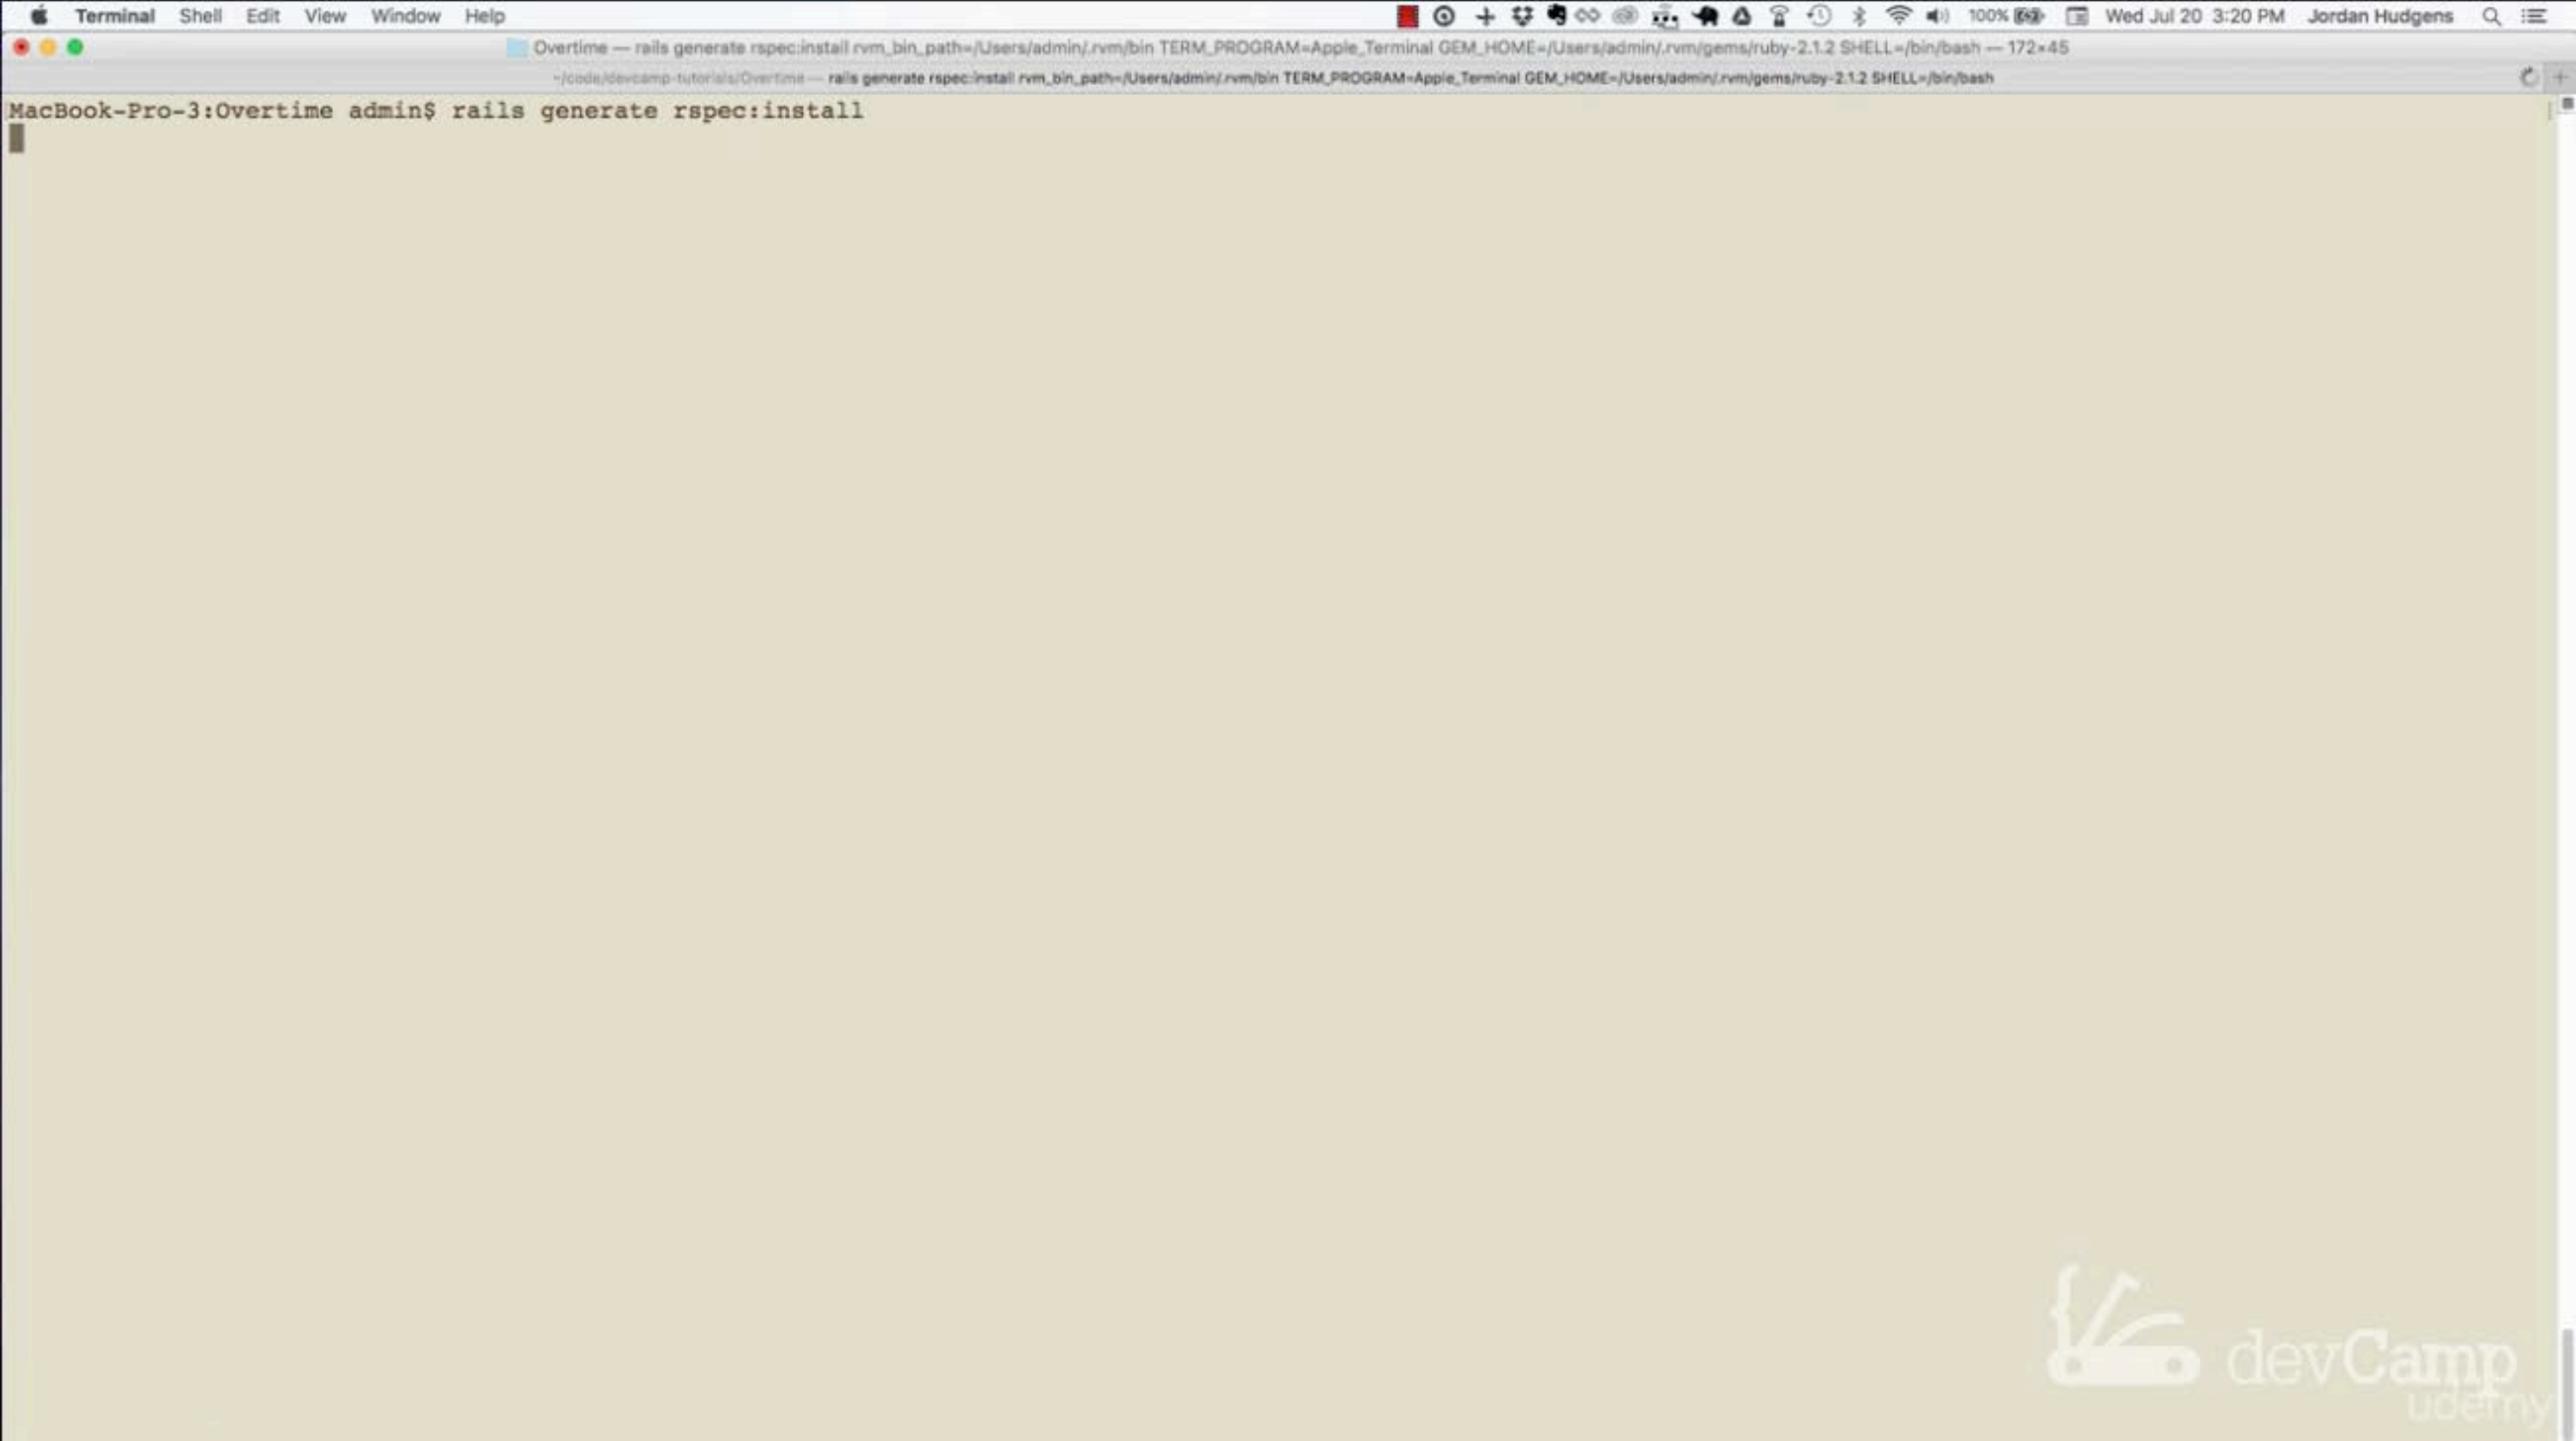

```
MacBook-Pro-3:Overtime admin$ rails generate rspec:install
Running via Spring preloader in process 53341
create spec
create spec
create spec/spec_helper.rb
create spec/rails_helper.rb
MacBook-Pro-3:Overtime admin$
```

[Go to Dashboard](#)

FOLDERS

Overtime

app

bin

config

db

lib

log

public

spec

New File

Controllers

Rename...

Open Terminal Here...

helpers

New Folder...

Delete Folder

Find in Folder...

test\_helper.rb

tmp

vendor

.gitignore

.rspec

config.ru

Gemfile

Gemfile.lock

Rakefile

README.md

Section 2, Lecture 6

README.md

Gemfile

1 source 'https://rubygems.org'

2

3 gem 'rails', '4.2.6'

4 gem 'pg', '~> 0.15'

5 gem 'sass-rails', '~> 5.0'

6 gem 'uglifier', '>= 1.3.0'

7 gem 'coffee-rails', '~> 4.1.0'

8 gem 'jquery-rails'

9 gem 'turbolinks'

10 gem 'jbuilder', '~> 2.0'

11 gem 'sdoc', '~> 0.4.0', group: :doc

12

13 group :development, :test do

14 gem 'byebug'

15 gem 'rspec-rails', '~> 3.0'

16 gem 'capybara'

17 gem 'database\_cleaner'

18 end

19

20 group :development do

21 gem 'web-console', '~> 2.0'

22 gem 'spring'

23 end



## Section 2, Lecture 6

Resources available

```
1 # This file is copied to spec/ when you run 'rails
2 ENV['RAILS_ENV'] ||= 'test'
3 require File.expand_path('.../config/environment
4 # Prevent database truncation if the environment i
5 abort("The Rails environment is running in production mode!") if Rails.env.production?
6 require 'spec_helper'
7 require 'rspec/rails'
8 # Add additional requires below this line. Rails is not loaded until this point!
9
10 # Requires supporting ruby files with custom matchers and macros, etc, in
11 # spec/support/ and its subdirectories. Files matching `spec/**/*_spec.rb` are
12 # run as spec files by default. This means that files in spec/support that end
13 # in _spec.rb will both be required and run as specs, causing the specs to be
14 # run twice. It is recommended that you do not name files matching this glob to
15 # end with _spec.rb. You can configure this pattern with the --pattern
16 # option on the command line or in ~/.rspec, .rspec or '.rspec-local'.
17 #
18 # The following line is provided for convenience purposes. It has the downside
19 # of increasing the boot-up time by auto-requiring all files in the support
20 # directory. Alternatively, in the individual *_spec.rb files, manually
21 # require only the support files necessary.
22 #
23 # Dir[Rails.root.join('spec/support/**/*.rb')].each { |f| require f }
24
25 # Checks for pending migration and applies them before tests are run.
26 # If you are not using ActiveRecord, you can remove this line.
27 ActiveRecord::Migration.maintain_test_schema!
28
29 RSpec.configure do |config|
30   # Remove this line if you're not using ActiveRecord or ActiveRecord fixtures
31   config.fixture_path = "#{::Rails.root}/spec/fixtures"
32
33   # If you're not using ActiveRecord, or you'd prefer not to run each of your
34   # examples within a transaction, remove the following line or assign false
35   # instead of true.
36   config.use_transactional_fixtures = true
37
38   # RSpec Rails can automatically mix in different behaviours to your tests
39   # based on their file location, for example enabling you to call `get` and
40   # `post` in specs under `spec/controllers`.
41   #
42   # You can disable this behaviour by removing the line below, and instead
43   # explicitly tag your specs with their type, e.g.:
44   #
45   #     RSpec.describe UsersController, :type => :controller do
46   #       # ...
47   #     end
48   #
49   # The different available types are documented in the features, such as in
50   # http://relishrspec.org/RSPEC/#core-behaviours
51   config.infer_spec_type_from_file_location!
```




FOLDERS

Overtime

- app
- bin
- config
- db
- lib
- log
- public
- spec
  - rails\_helper.rb
  - spec\_helper.rb

- tmp
- vendor
  - .gitignore
  - .rspec
  - config.ru
  - Gemfile
  - Gemfile.lock
  - Rakefile
  - README.md

```
1 ENV['RAILS_ENV'] ||= 'test'
2 require File.expand_path('../../config/environment', __FILE__)
3
4 abort("The Rails environment is running in production mode!") if Rails.env.production?
5 require 'spec_helper'
6 require 'rspec/rails'
7 require 'capybara/rails'
8
9 ActiveRecord::Migration.maintain_test_schema!
10
11 RSpec.configure do |config|
12   config.fixture_path = "#{::Rails.root}/spec/fixtures"
13   config.use_transactional_fixtures = false
14   config.before(:suite) { DatabaseCleaner.clean_with(:truncation) }
15   config.before(:each) { DatabaseCleaner.strategy = :transaction }
16   config.before(:each, :js => true) { DatabaseCleaner.strategy = :truncation }
17   config.before(:each) { DatabaseCleaner.start }
18   config.after(:each) { DatabaseCleaner.clean }
19   config.infer_spec_type_from_file_location!
20   config.filter_rails_from_backtrace!
21 end
```

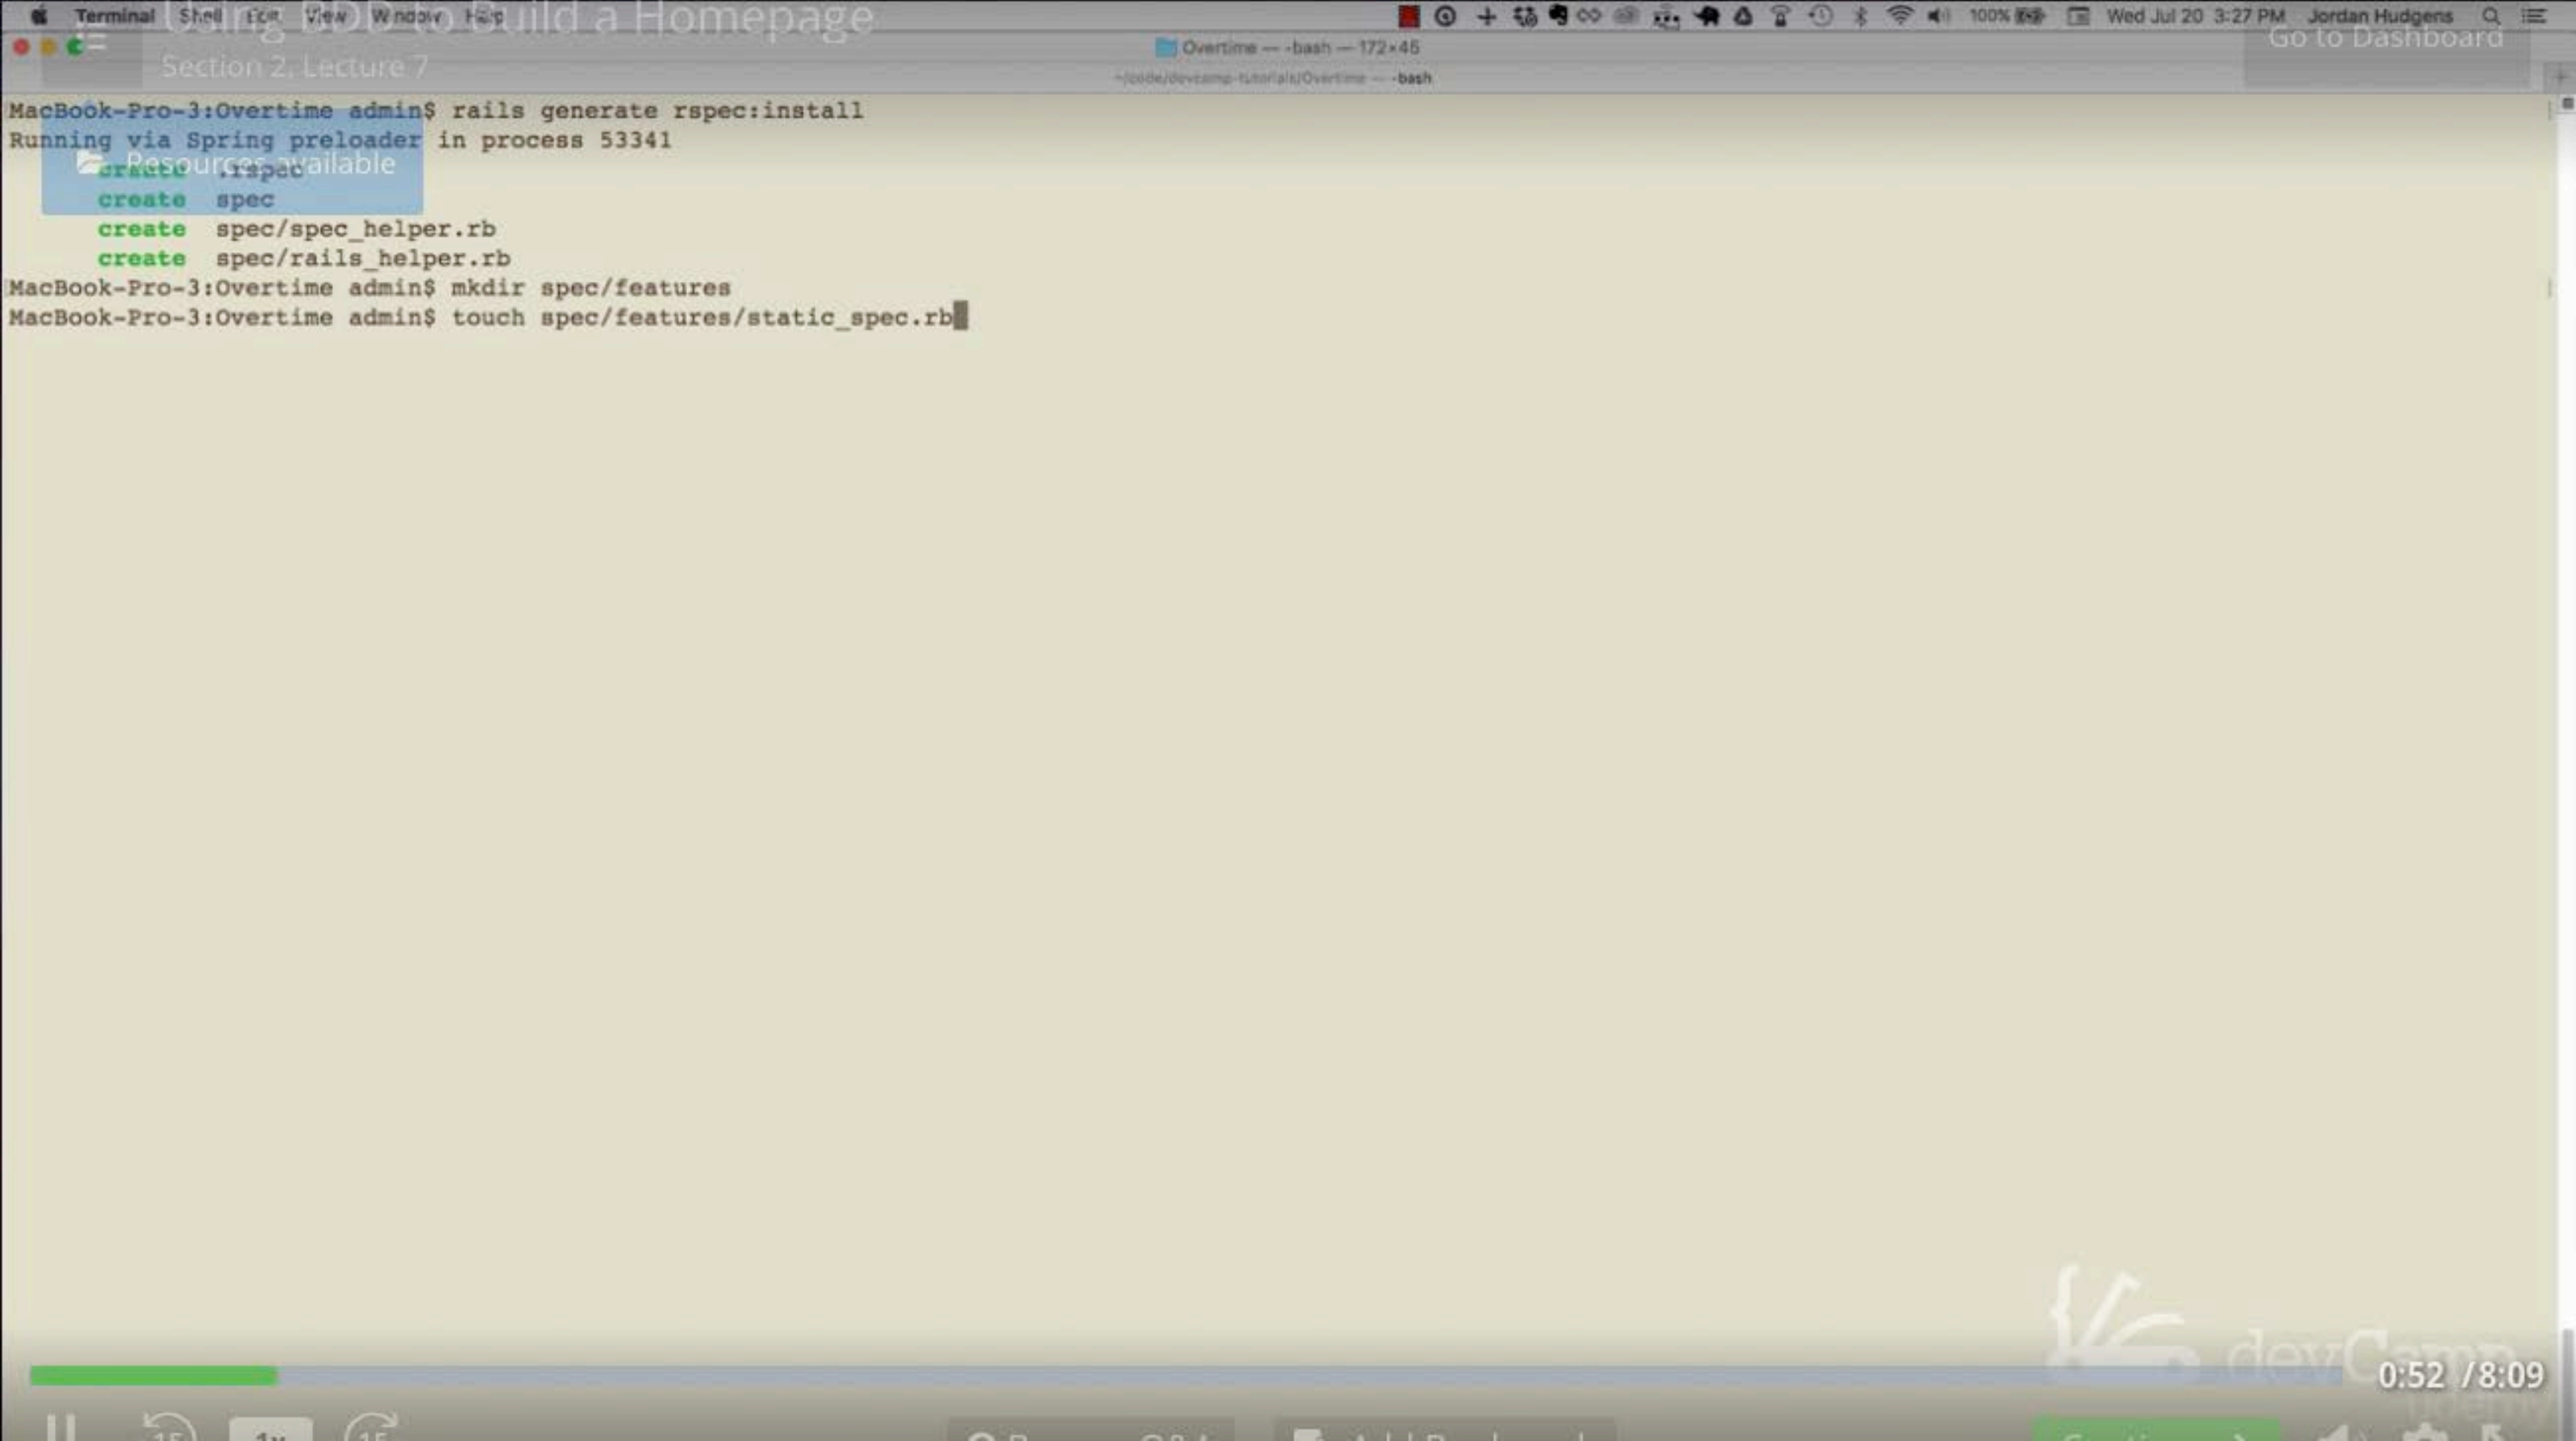

## Section 2, Lecture 7

Overtime -- bash -- 172x45

~/code/devcamp-tutorial/Overtime -- bash

Go to Dashboard

MacBook-Pro-3:Overtime admin\$ rails generate rspec:install

Running via Spring preloader in process 53341

create .rspec

create spec

create spec/spec\_helper.rb

create spec/rails\_helper.rb

MacBook-Pro-3:Overtime admin\$ mkdir spec/features

MacBook-Pro-3:Overtime admin\$ touch spec/features/static\_spec.rb

FOLDERS

- ▼ Overtime
  - ▶ app
  - ▶ bin
  - ▶ config
  - ▶ db
  - ▶ lib
  - ▶ log
  - ▶ public
  - ▼ spec
    - ▶ features
      - rails\_helper.rb
      - spec\_helper.rb
  - ▶ tmp
  - ▶ vendor
    - .gitignore
    - .rspec
    - config.ru
    - Gemfile
    - Gemfile.lock
    - Rakefile
    - README.md

```
1 require 'rails_helper'
2
3 describe 'navigate' do
4   describe 'homepage' do
5     it 'can be reached successfully' do
6       visit root_path
7       expect(page.status_code).to eq(200)
8     end
9   end
10 end
```



```
Terminal Shell Edit View Window Help
Overtime -- bash -- 172x45
~/code/devcamp-tutorials/Overtime -- bash

create spec/rails_helper.rb
MacBook-Pro-3:Overtime admin$ mkdir spec/features
MacBook-Pro-3:Overtime admin$ touch spec/features/static_spec.rb
MacBook-Pro-3:Overtime admin$ rspec
/Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:661:in `rescue in connect': FATAL: database "Overtime_test" does not exist (ActiveRecord::NoDatabaseError)
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:651:in `connect'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:242:in `initialize'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:44:in `new'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:44:in `postgresql_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:438:in `new_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:448:in `checkout_new_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:422:in `acquire_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:349:in `block in checkout'
from /Users/admin/.rvm/rubies/ruby-2.1.2/lib/ruby/2.1.0/monitor.rb:211:in `mon_synchronize'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:348:in `checkout'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:263:in `block in connection'
from /Users/admin/.rvm/rubies/ruby-2.1.2/lib/ruby/2.1.0/monitor.rb:211:in `mon_synchronize'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:262:in `connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:571:in `retrieve_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_handling.rb:113:in `retrieve_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_handling.rb:87:in `connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:857:in `needs_migration?'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:396:in `load_schema_if_pending!'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:411:in `block in maintain_test_schema!'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:642:in `suppress_messages'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:416:in `method_missing'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:411:in `maintain_test_schema!'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/rails_helper.rb:9:in `'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/features/static_spec.rb:1:in `require'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/features/static_spec.rb:1:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1435:in `load'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1435:in `block in load_spec_files'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1433:in `each'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1433:in `load_spec_files'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:100:in `setup'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:86:in `run'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:71:in `run'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:45:in `invoke'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/exe/rspec:4:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/rspec:23:in `load'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/rspec:23:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/ruby_executable_hooks:15:in `eval'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/ruby_executable_hooks:15:in `'
MacBook-Pro-3:Overtime admin$
```





```
Terminal Shell Edit View Window Help
Overtime — ruby_executable_hooks ~/.rvm/gems/ruby-2.1.2@global/bin/bundle exec rake db:create — 172x45
~/code/devcamp-tutorials/Overtime — ruby_executable_hooks ~/.rvm/gems/ruby-2.1.2@global/bin/bundle exec rake db:create

MacBook-Pro-3:Overtime admin$ mkdir spec/features
MacBook-Pro-3:Overtime admin$ touch spec/features/static_spec.rb
MacBook-Pro-3:Overtime admin$ rspec
/Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:661:in `rescue in connect': FATAL: database "Overtime_test" does not exist (ActiveRecord::NoDatabaseError)
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:651:in `connect'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:242:in `initialize'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:44:in `new'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/postgresql_adapter.rb:44:in `postgresql_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:438:in `new_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:448:in `checkout_new_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:422:in `acquire_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:349:in `block in checkout'
from /Users/admin/.rvm/rubies/ruby-2.1.2/lib/ruby/2.1.0/monitor.rb:211:in `mon_synchronize'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:348:in `checkout'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:263:in `block in connection'
from /Users/admin/.rvm/rubies/ruby-2.1.2/lib/ruby/2.1.0/monitor.rb:211:in `mon_synchronize'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:262:in `connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_adapters/abstract/connection_pool.rb:571:in `retrieve_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_handling.rb:113:in `retrieve_connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/connection_handling.rb:87:in `connection'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:857:in `needs_migration?'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:396:in `load_schema_if_pending!'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:411:in `block in maintain_test_schema!'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:642:in `suppress_messages'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:416:in `method_missing'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:411:in `maintain_test_schema!'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/rails_helper.rb:9:in `'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/features/static_spec.rb:1:in `require'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/features/static_spec.rb:1:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1435:in `load'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1435:in `block in load_spec_files'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1433:in `each'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1433:in `load_spec_files'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:100:in `setup'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:86:in `run'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:71:in `run'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:45:in `invoke'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/exe/rspec:4:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/rspec:23:in `load'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/rspec:23:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/ruby_executable_hooks:15:in `eval'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/ruby_executable_hooks:15:in `'
MacBook-Pro-3:Overtime admin$ bundle exec rake db:create
```





Resources available

```
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:857:in `needs_migration?'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:396:in `load_schema_if_pending!'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:411:in `block in maintain_test_schema!'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:642:in `suppress_messages'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:416:in `method_missing'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/activerecord-4.2.6/lib/active_record/migration.rb:411:in `maintain_test_schema!'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/rails_helper.rb:9:in `'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/features/static_spec.rb:1:in `require'
from /Users/admin/code/devcamp-tutorials/Overtime/spec/features/static_spec.rb:1:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1435:in `load'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1435:in `block in load_spec_files'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1433:in `each'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/configuration.rb:1433:in `load_spec_files'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:100:in `setup'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:86:in `run'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:71:in `run'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/lib/rspec/core/runner.rb:45:in `invoke'
from /Users/admin/.rvm/gems/ruby-2.1.2/gems/rspec-core-3.5.0/exe/rspec:4:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/rspec:23:in `load'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/rspec:23:in `'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/ruby_executable_hooks:15:in `eval'
from /Users/admin/.rvm/gems/ruby-2.1.2/bin/ruby_executable_hooks:15:in `'
```

```
MacBook-Pro-3:Overtime admin$ bundle exec rake db:create
MacBook-Pro-3:Overtime admin$ bundle exec rake db:migrate
MacBook-Pro-3:Overtime admin$ rspec
Running via Spring preloader in process 53528
```

F

Failures:

- 1) navigate homepage can be reached successfully  
Failure/Error: visit root\_path  
  
NameError:  
undefined local variable or method `root\_path' for #<RSpec::ExampleGroups::Navigate::Homepage:0x007fc7d7b4db50>  
# ./spec/features/static\_spec.rb:6:in `block (3 levels) in <top (required)>'


```
Finished in 0.10534 seconds (files took 9.79 seconds to load)
1 example, 1 failure
```

Failed examples:

```
rspec ./spec/features/static_spec.rb:5 # navigate homepage can be reached successfully
```

```
MacBook-Pro-3:Overtime admin$
```



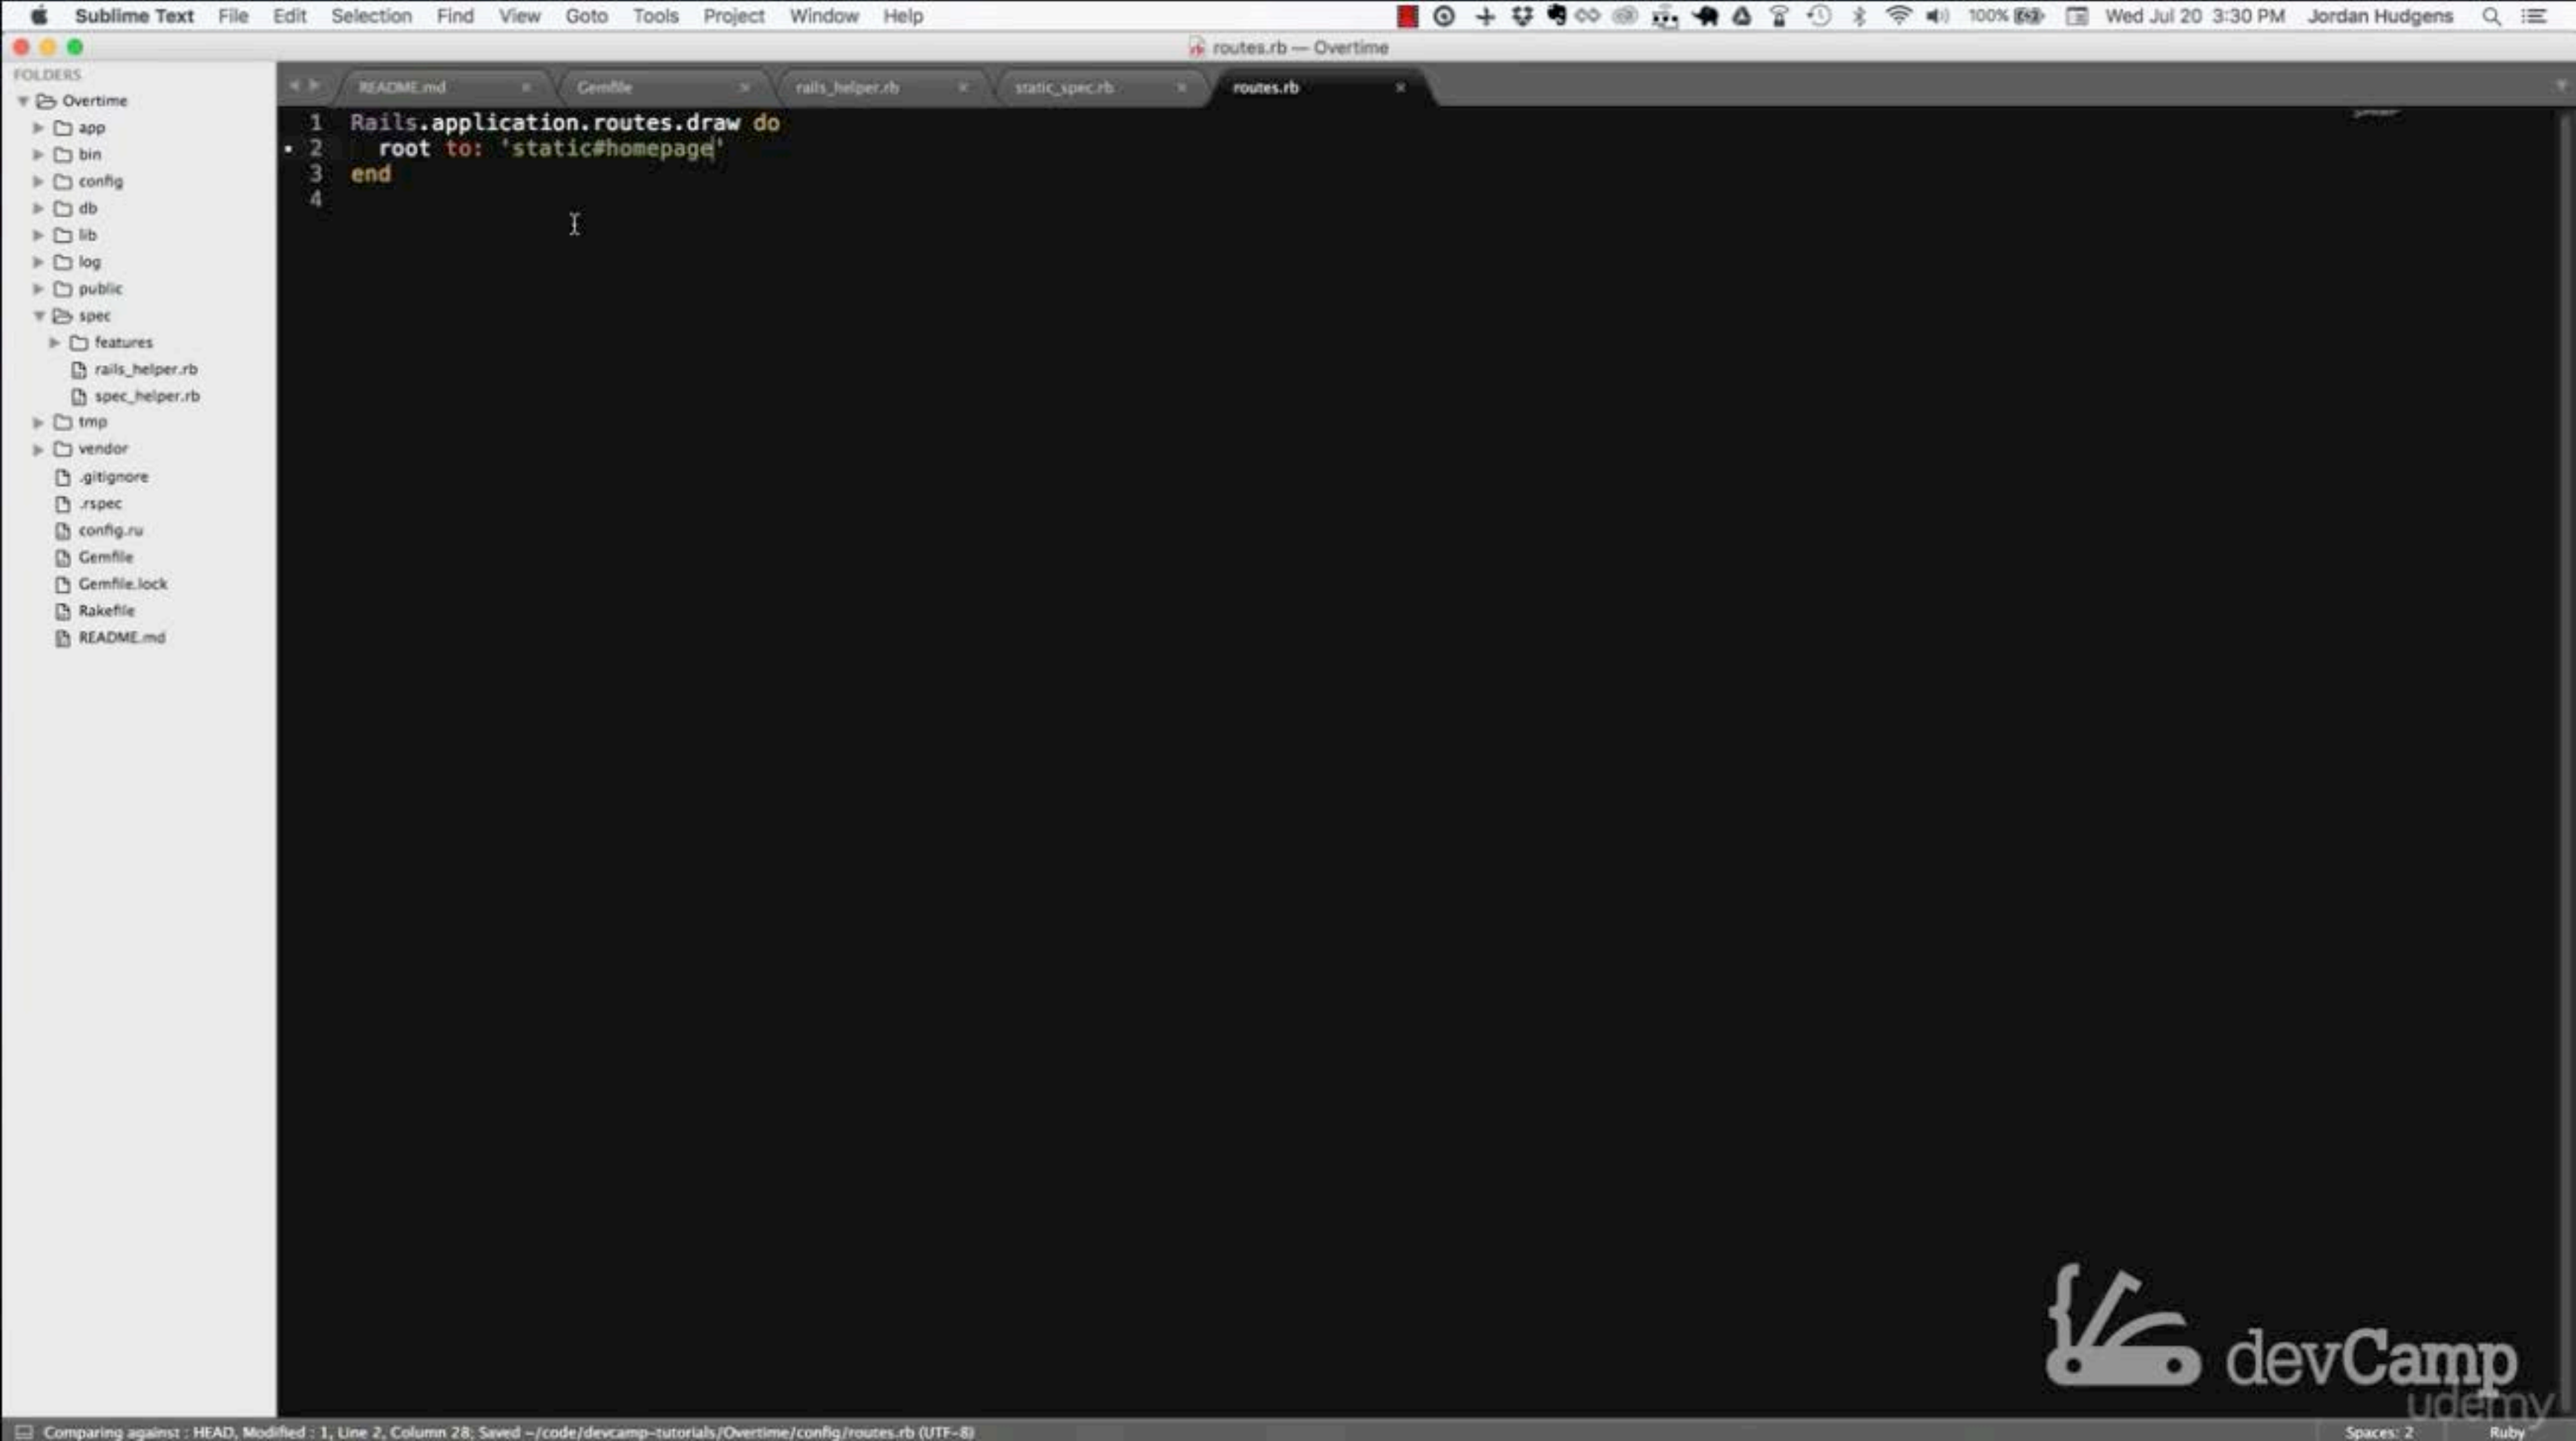

Running via Spring preloader in process 53584

F

Failures:

- 1) navigate homepage can be reached successfully

Failure/Error: visit root\_path

ActionController::RoutingError:

uninitialized constant StaticController

```
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/etag.rb:24:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/conditionalget.rb:25:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/head.rb:13:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/session/abstract/id.rb:225:in `context'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/session/abstract/id.rb:220:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:38:in `call_app'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:20:in `block in call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:20:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/methodoverride.rb:22:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/runtime.rb:18:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/lock.rb:17:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/sendfile.rb:113:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/engine.rb:518:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/application.rb:165:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:66:in `block in call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:50:in `each'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:50:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/mock_session.rb:30:in `request'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/test.rb:244:in `process_request'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/test.rb:58:in `get'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:61:in `process'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:36:in `process_and_follow_redirects'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:22:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/driver.rb:43:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/session.rb:233:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/dsl.rb:52:in `block (2 levels) in <module:DSL>'
# ./spec/features/static_spec.rb:6:in `block (3 levels) in <top (required)>'
# -----
# --- Caused by: ---
# NameError:
#   uninitialized constant StaticController
#   /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/etag.rb:24:in `call'
```

Finished in 0.0379 seconds (files took 5.48 seconds to load)


1 example, 1 failure



devCamp

uodemy



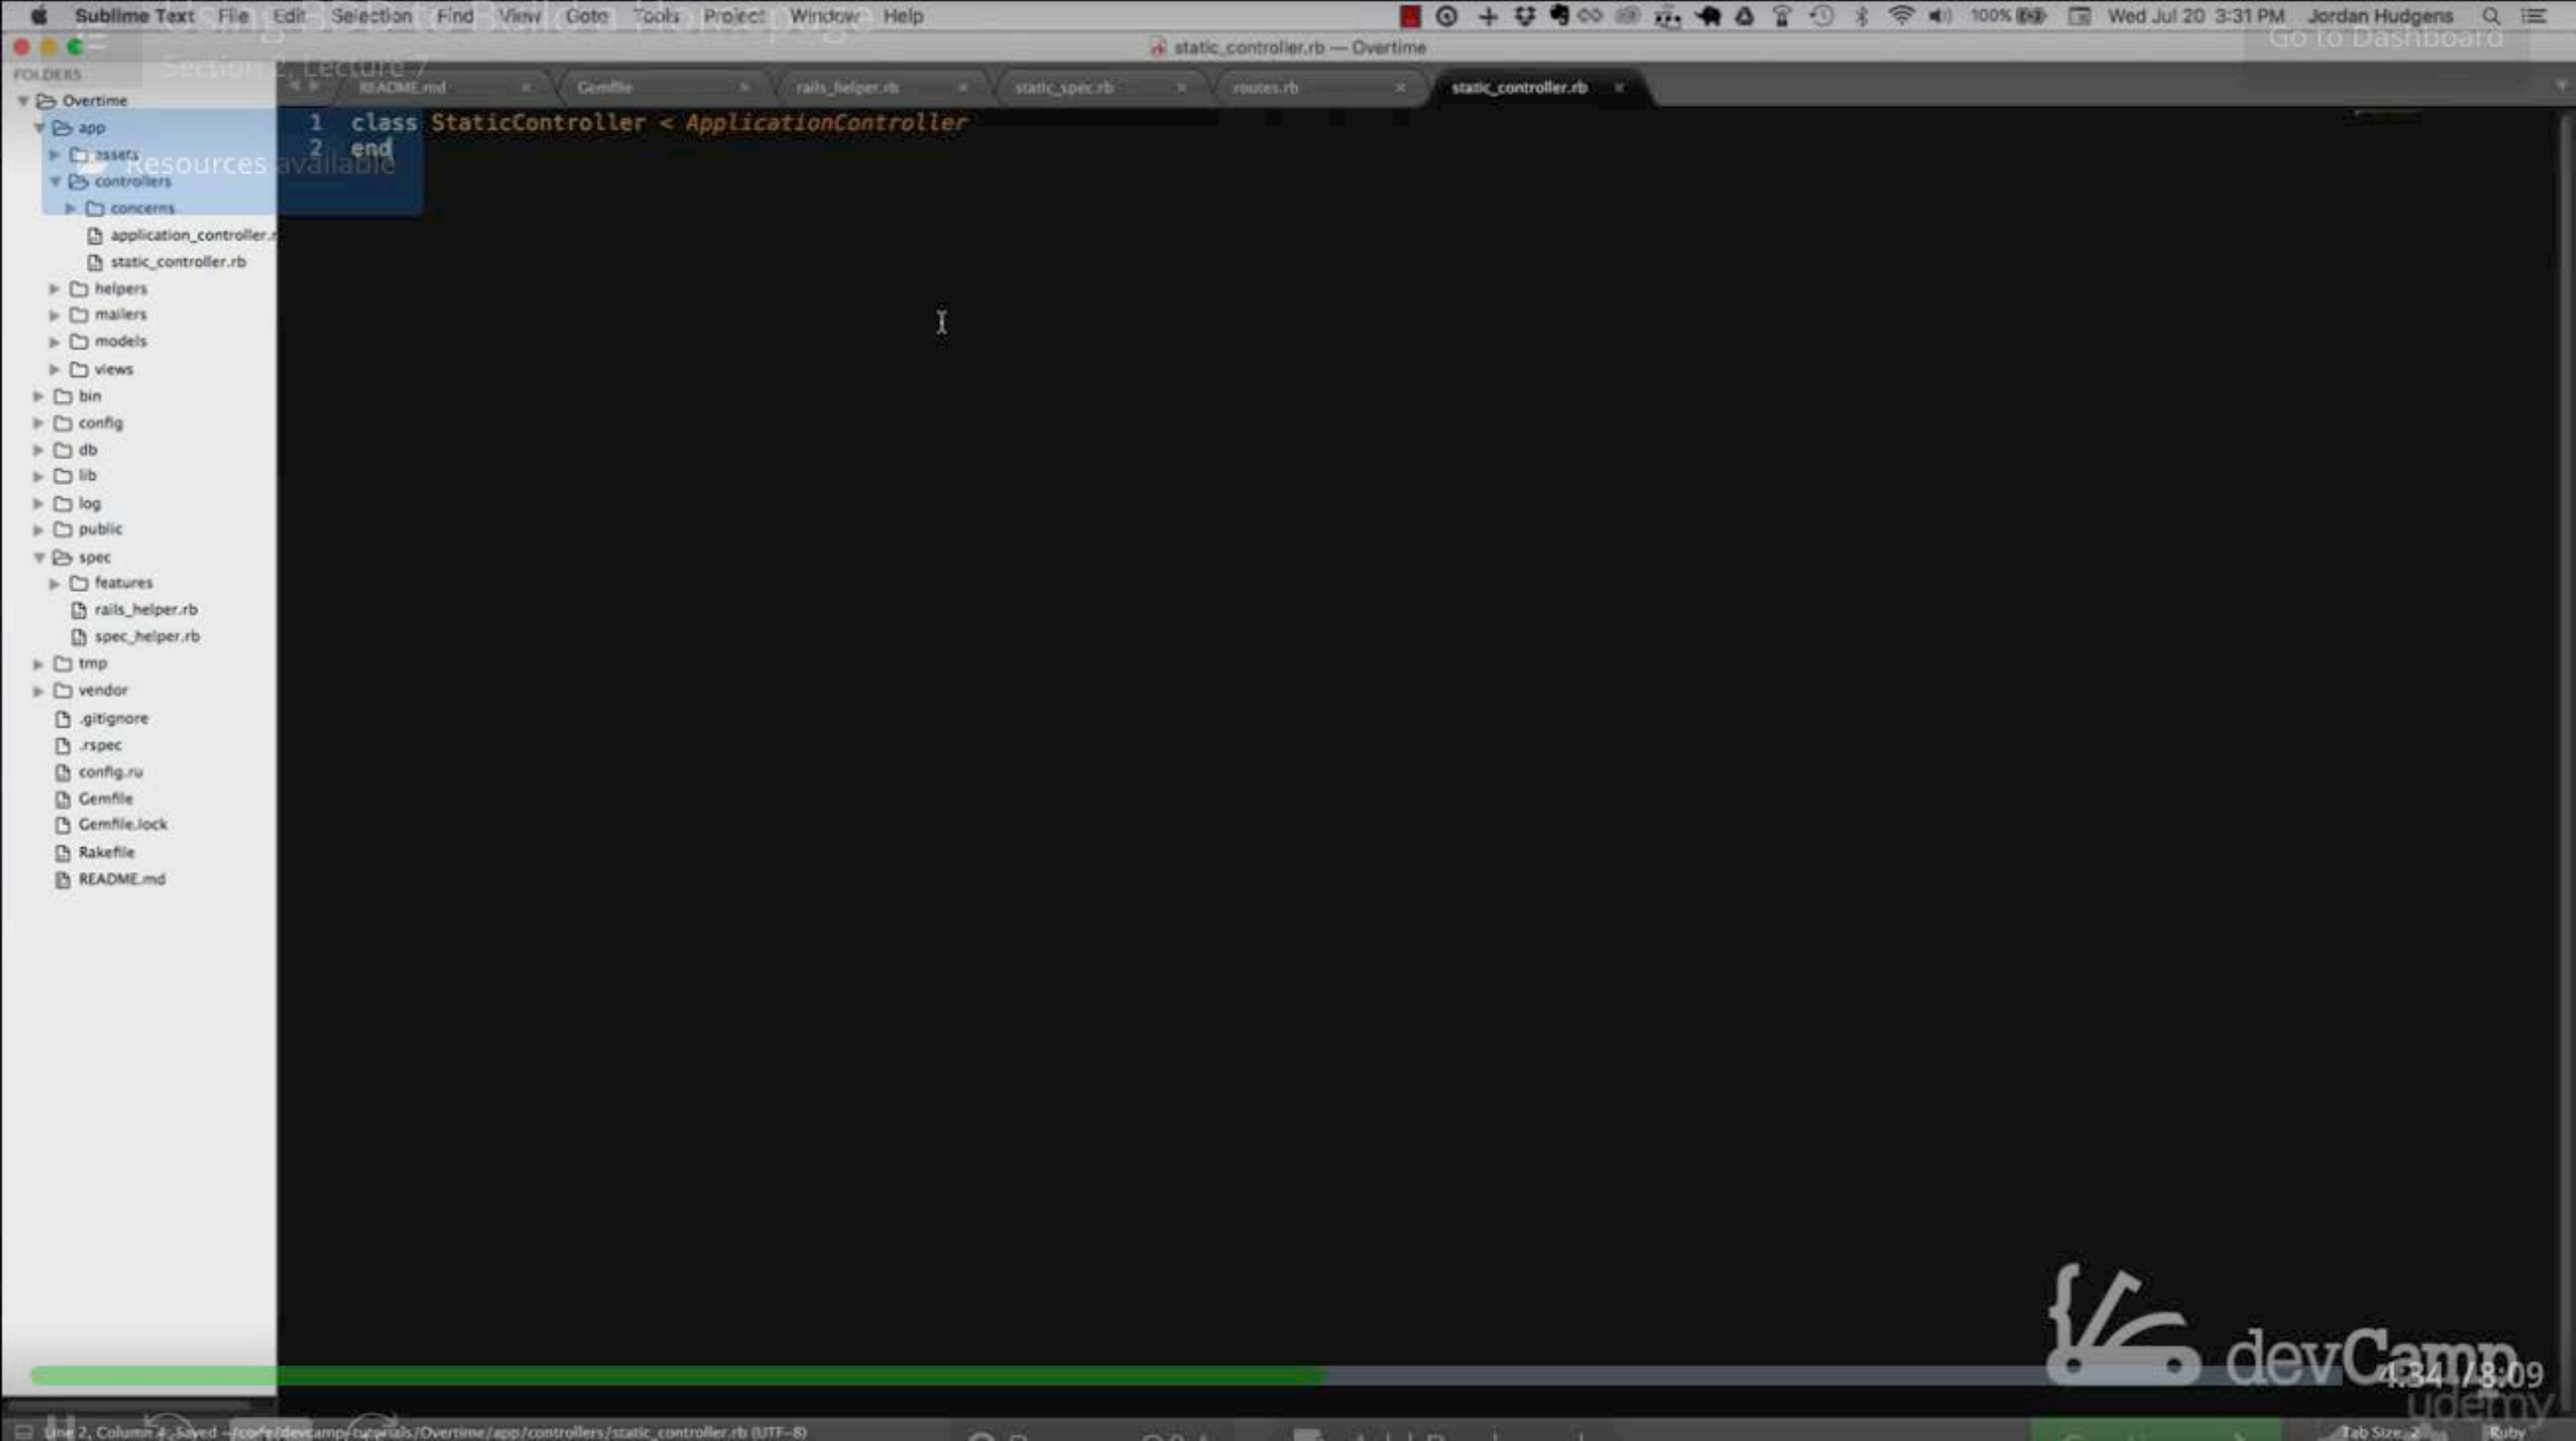

F

## Failures:

- 1) navigate homepage can be reached successfully

Failure/Error: visit root\_path

AbstractController::ActionNotFound:

The action 'homepage' could not be found for StaticController

```
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/etag.rb:24:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/conditionalget.rb:25:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/head.rb:13:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/session/abstract/id.rb:225:in `context'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/session/abstract/id.rb:220:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:38:in `call_app'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:20:in `block in call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:20:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/methodoverride.rb:22:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/runtime.rb:18:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/lock.rb:17:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/sendfile.rb:113:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/engine.rb:518:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/application.rb:165:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:66:in `block in call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:50:in `each'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:50:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/mock_session.rb:30:in `request'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/test.rb:244:in `process_request'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/test.rb:58:in `get'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:61:in `process'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:36:in `process_and_follow_redirects'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:22:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/driver.rb:43:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/session.rb:233:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/dsl.rb:52:in `block (2 levels) in <module:DSL>'
# ./spec/features/static_spec.rb:6:in `block (3 levels) in <top (required)>'
```

Finished in 0.06657 seconds (files took 5.42 seconds to load)

1 example, 1 failure


## Failed examples:

rspec ./spec/features/static\_spec.rb:5 # navigate homepage can be reached successfully

MacBook-Pro-3:Overtime admin\$





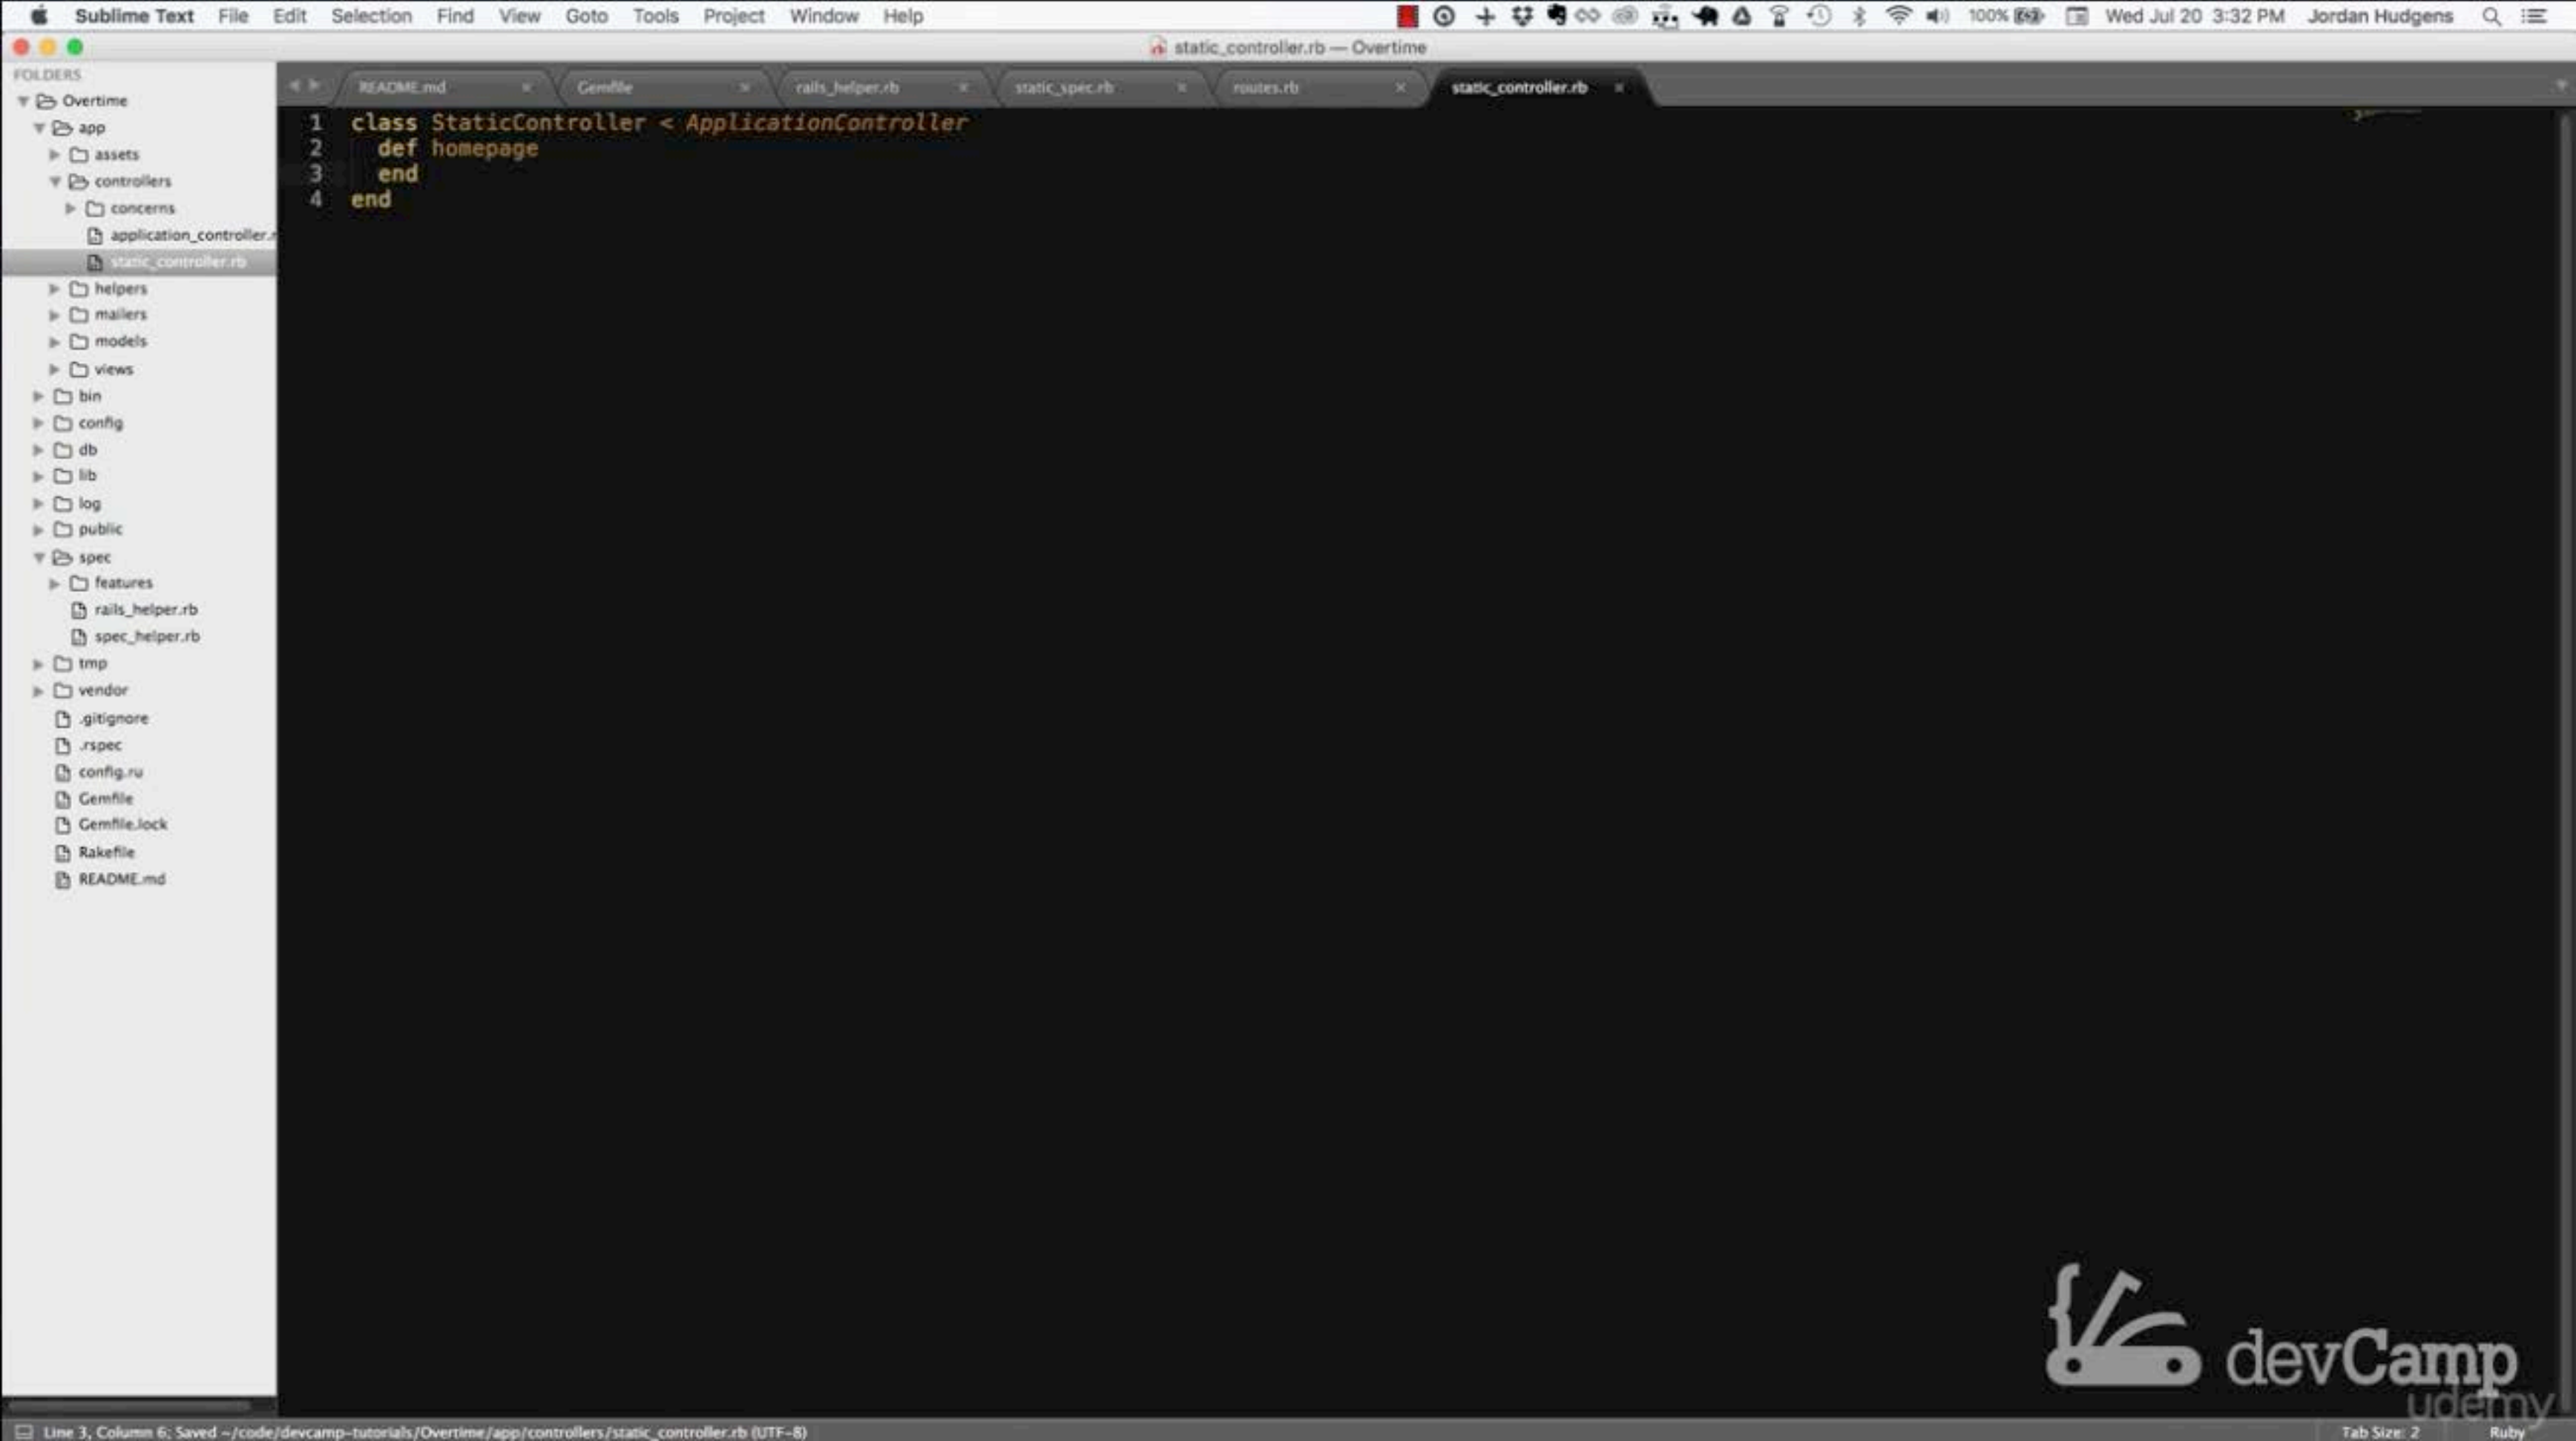



Failures:

```
1) navigate homepage can be reached successfully
   Failure/Error: visit root_path

   ActionView::MissingTemplate:
     Missing template static/homepage, application/homepage with {:locale=>[:en], :formats=>[:html], :variants=>[], :handlers=>[:erb, :builder, :raw, :ruby, :coffee, :jbuilder]}. Searched in:
       * "/Users/admin/code/devcamp-tutorials/Overtime/app/views"
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/etag.rb:24:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/conditionalget.rb:25:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/head.rb:13:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/session/abstract/id.rb:225:in `context'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/session/abstract/id.rb:220:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:38:in `call_app'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:20:in `block in call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:20:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/methodoverride.rb:22:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/runtime.rb:18:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/lock.rb:17:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/sendfile.rb:113:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/engine.rb:518:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/application.rb:165:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:66:in `block in call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:50:in `each'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:50:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/mock_session.rb:30:in `request'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/test.rb:244:in `process_request'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/test.rb:58:in `get'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:61:in `process'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:36:in `process_and_follow_redirects'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:22:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/driver.rb:43:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/session.rb:233:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/dsl.rb:52:in `block (2 levels) in <module:DSL>'
# ./spec/features/static_spec.rb:6:in `block (3 levels) in <top (required)>'
```

Finished in 0.0744 seconds (files took 5.46 seconds to load)

1 example, 1 failure

Failed examples:

```
rspec ./spec/features/static_spec.rb:5 # navigate homepage can be reached successfully
```

MacBook-Pro-3:Overtime admin\$



1 |



```
Terminal Shell Edit View Window Help
Overtime -- bash -- 172x45
~/code/devcamp-tutorials/Overtime -- bash

ilder}}. Searched in:
  * "/Users/admin/code/devcamp-tutorials/Overtime/app/views"
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/etag.rb:24:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/conditionalget.rb:25:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/head.rb:13:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/session/abstract/id.rb:225:in `context'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/session/abstract/id.rb:220:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:38:in `call_app'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:20:in `block in call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/rack/logger.rb:20:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/methodoverride.rb:22:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/runtime.rb:18:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/lock.rb:17:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/sendfile.rb:113:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/engine.rb:518:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/railties-4.2.6/lib/rails/application.rb:165:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:66:in `block in call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:50:in `each'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-1.6.4/lib/rack/urlmap.rb:50:in `call'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/mock_session.rb:30:in `request'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/test.rb:244:in `process_request'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/rack-test-0.6.3/lib/rack/test.rb:58:in `get'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:61:in `process'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:36:in `process_and_follow_redirects'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/browser.rb:22:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/rack_test/driver.rb:43:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/session.rb:233:in `visit'
# /Users/admin/.rvm/gems/ruby-2.1.2/gems/capybara-2.7.1/lib/capybara/dsl.rb:52:in `block (2 levels) in <module:DSL>'
# ./spec/features/static_spec.rb:6:in `block (3 levels) in <top (required)>'

Finished in 0.0744 seconds (files took 5.46 seconds to load)
1 example, 1 failure

Failed examples:


rspec ./spec/features/static_spec.rb:5 # navigate homepage can be reached successfully


MacBook-Pro-3:Overtime admin$ rspec
Running via Spring preloader in process 53680
.

Finished in 0.46977 seconds (files took 5.51 seconds to load)
1 example, 0 failures
1
MacBook-Pro-3:Overtime admin$
```





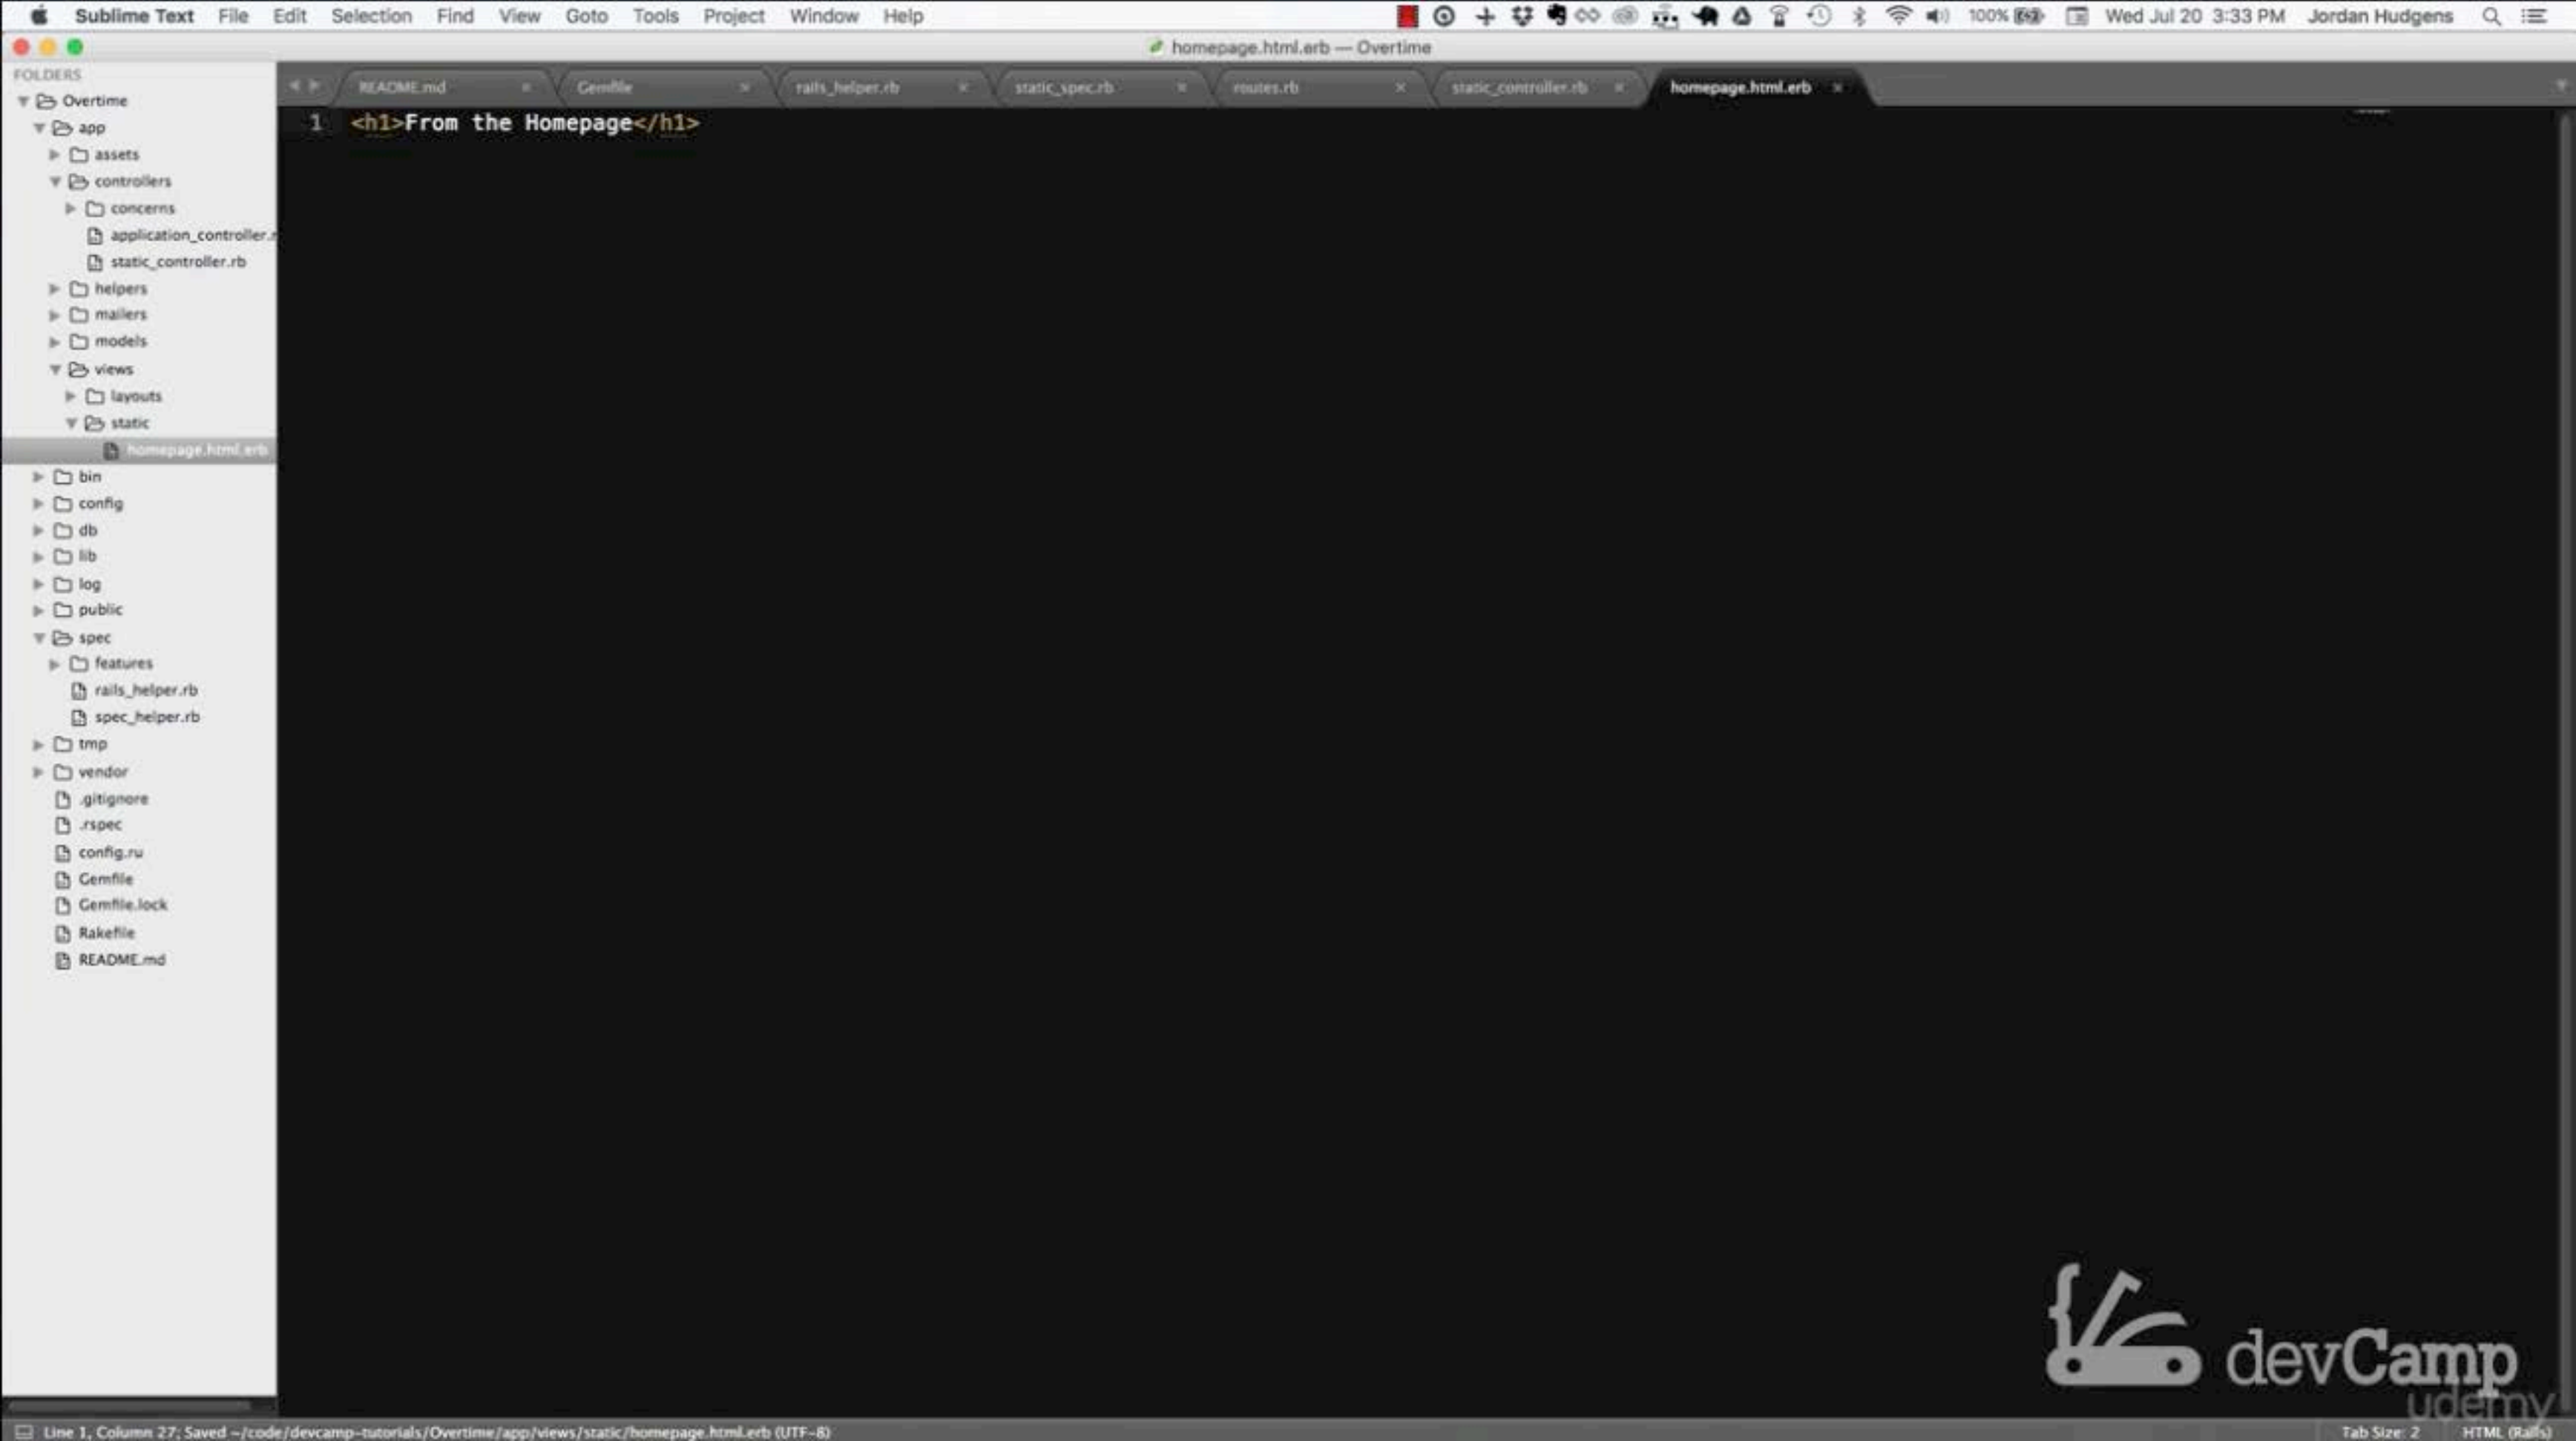

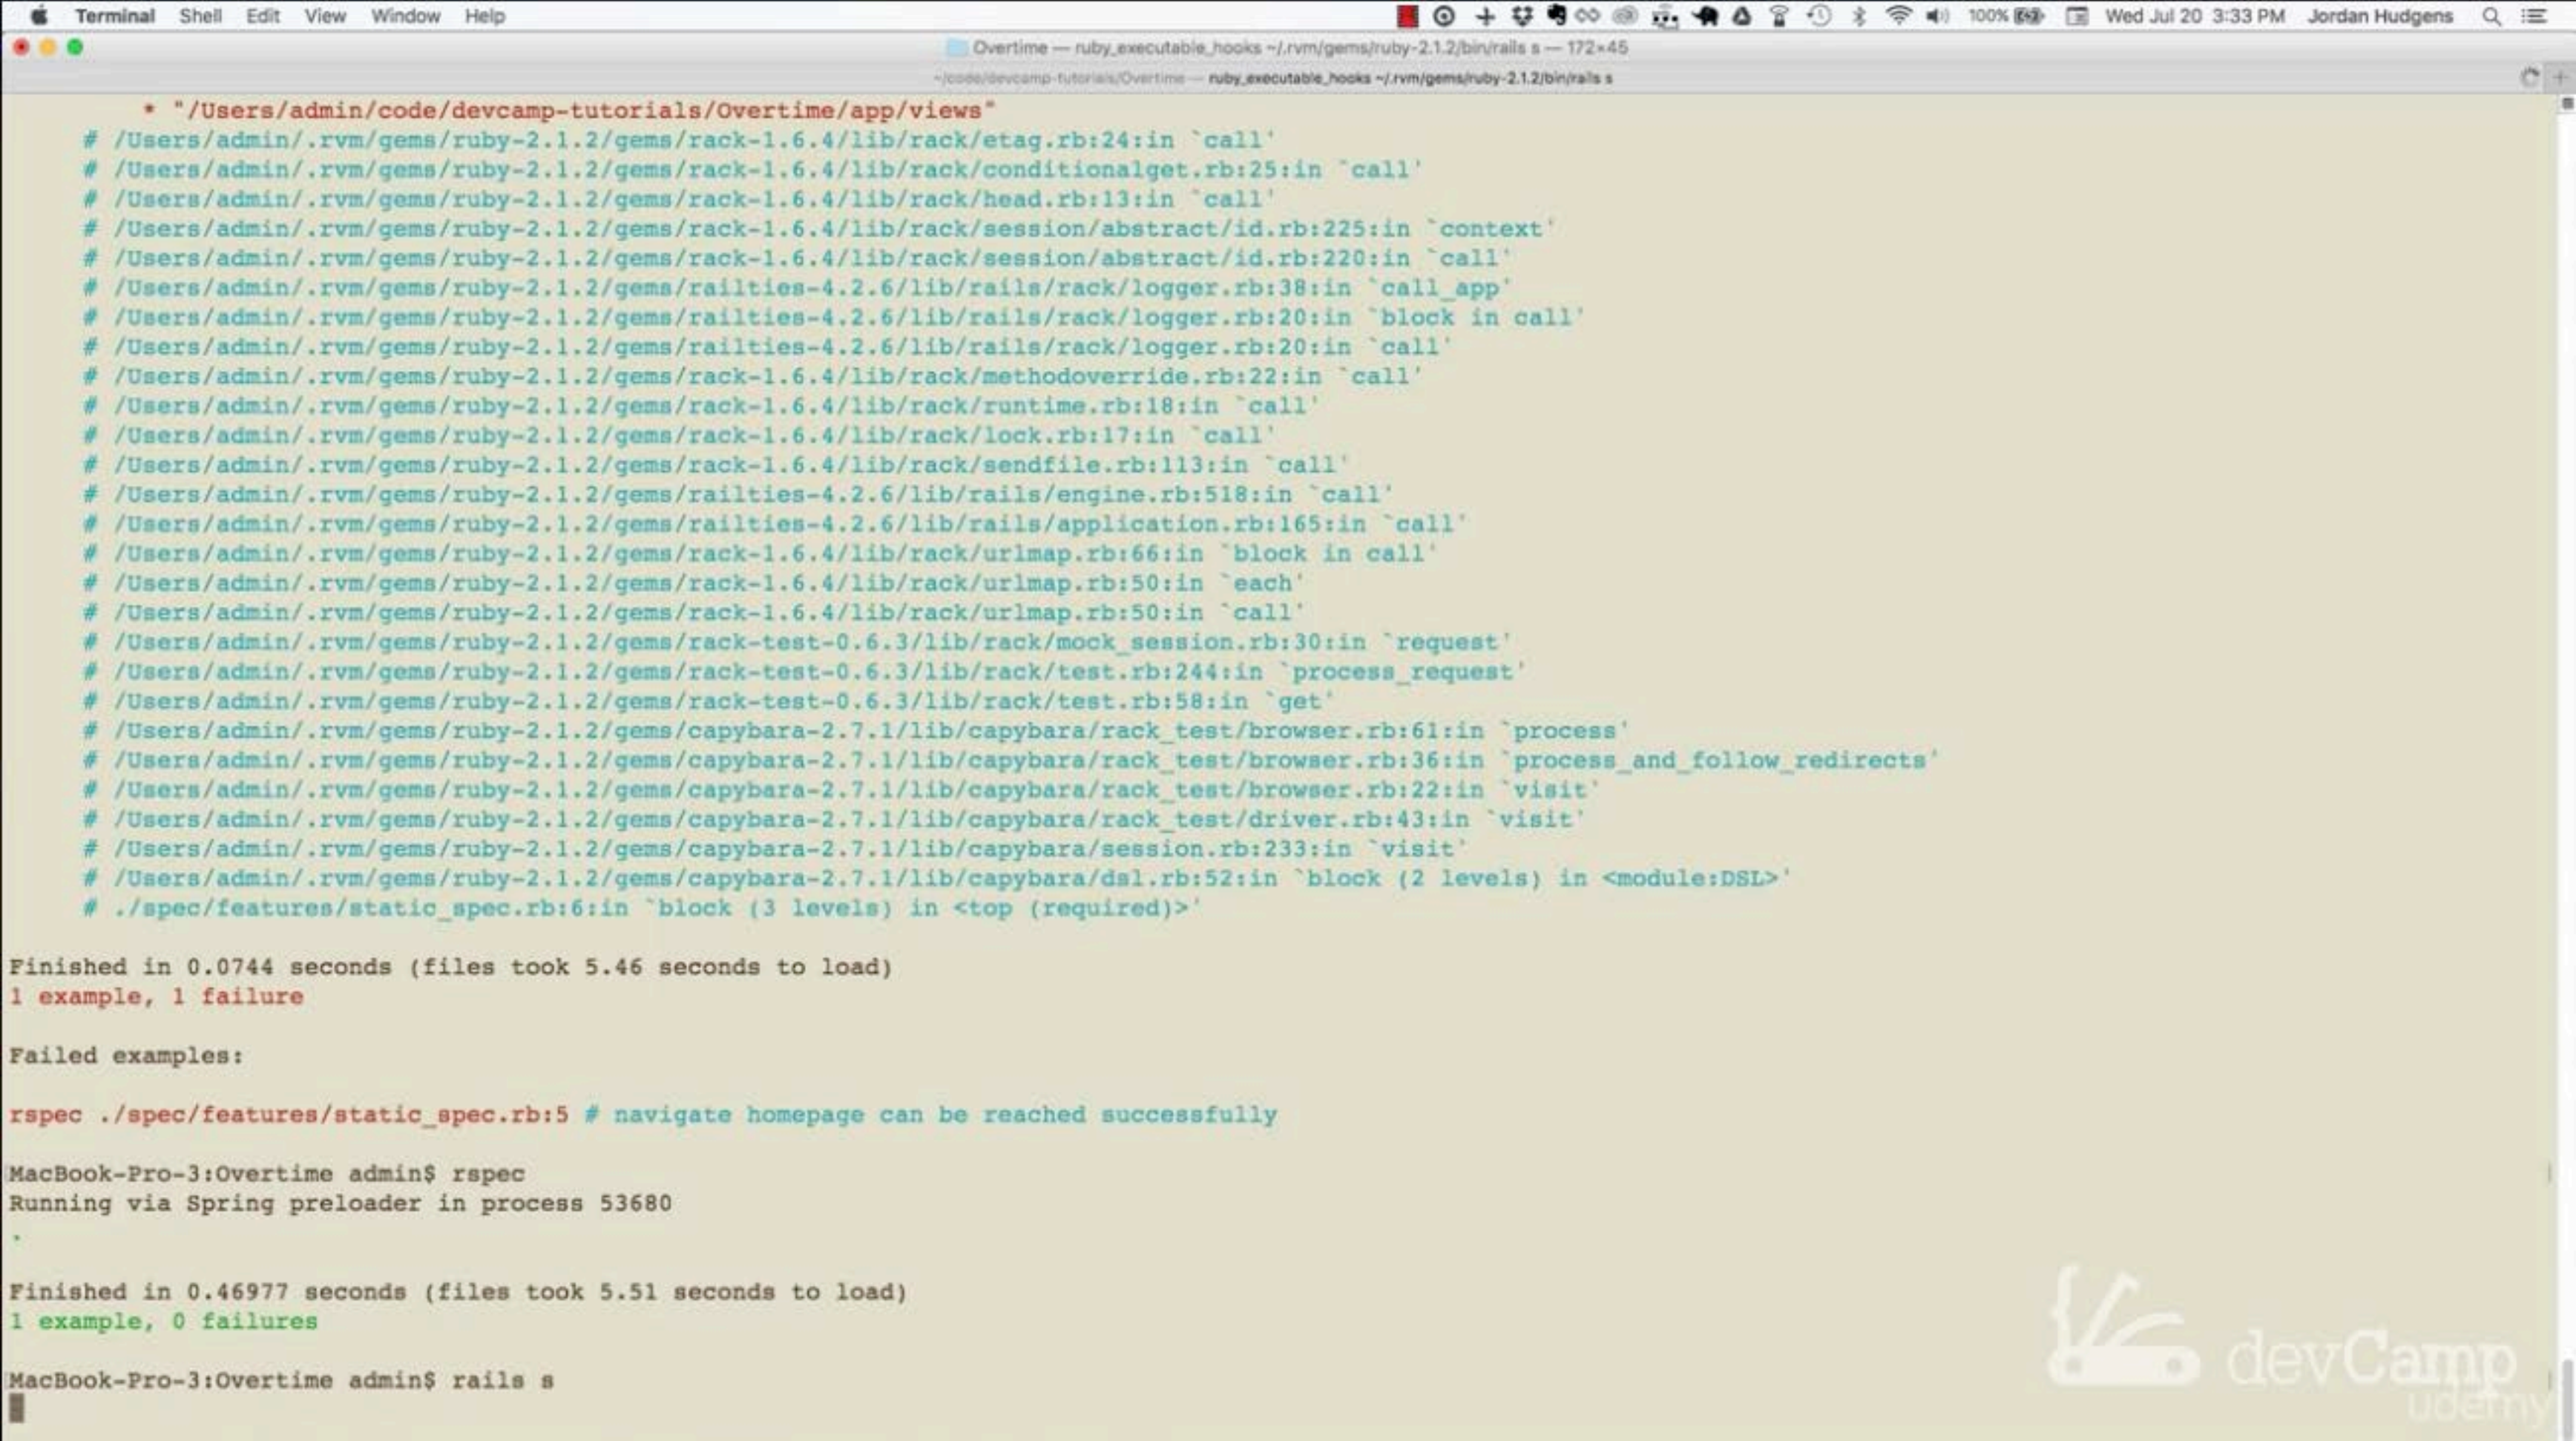



# From the Homepage

