

## Listing links

Title	Url	
Mackenzie's Website	<a href="http://mackenziechild.me">http://mackenziechild.me</a>	Show Edit Destroy
Twitter	<a href="http://twitter.com/mackenziechild">http://twitter.com/mackenziechild</a>	Show Edit Destroy

[New Link](#)

```
1: bash
[roddit (master)]$ git checkout -b add_users
Switched to a new branch 'add_users'
[roddit (add_users)]$
```

# RubyGems.org

your community gem host

[all gems](#) [sign in](#) [sign up](#)

## devise 3.3.0

Flexible authentication solution for Rails with Warden

INSTALL > `gem install devise`

[Download](#) [Badge](#) [Subscribe](#) [RSS](#)

### Authors

Jose Valim, Carlos Antonio

8,586,146 66,648  
total downloads for this version

### Owners



### Licenses

MIT

### Links

[Homepage](#)[Source Code](#)[Documentation](#)[Mailing List](#)

### Gemfile

```
gem 'devise', '~> 3.3.0'
```

### Versions

3.3.0 August 13, 2014 (160 KB)  
3.2.4 March 17, 2014 (151 KB)  
3.2.3 February 20, 2014 (151 KB)  
3.2.2 November 25, 2013 (151 KB)  
3.2.1 November 13, 2013 (151 KB)

[Show all versions \(121 total\)](#)

### Runtime Dependencies

bcrypt ~> 3.0  
orm\_adapter ~> 0.1  
railties < 5, >= 3.2.0  
thread\_safe ~> 0.1  
warden ~> 1.2.3

### Ruby Dependency

>= 0

[Help](#) [Guides](#) [Blog](#) [Contribute](#)[Mobile](#) [Status](#) [Uptime](#) [Code](#) [Discuss](#) [Stats](#) [About](#)

Supported by



Sponsored by


GitHub

Designed by



Rendered with


drumple

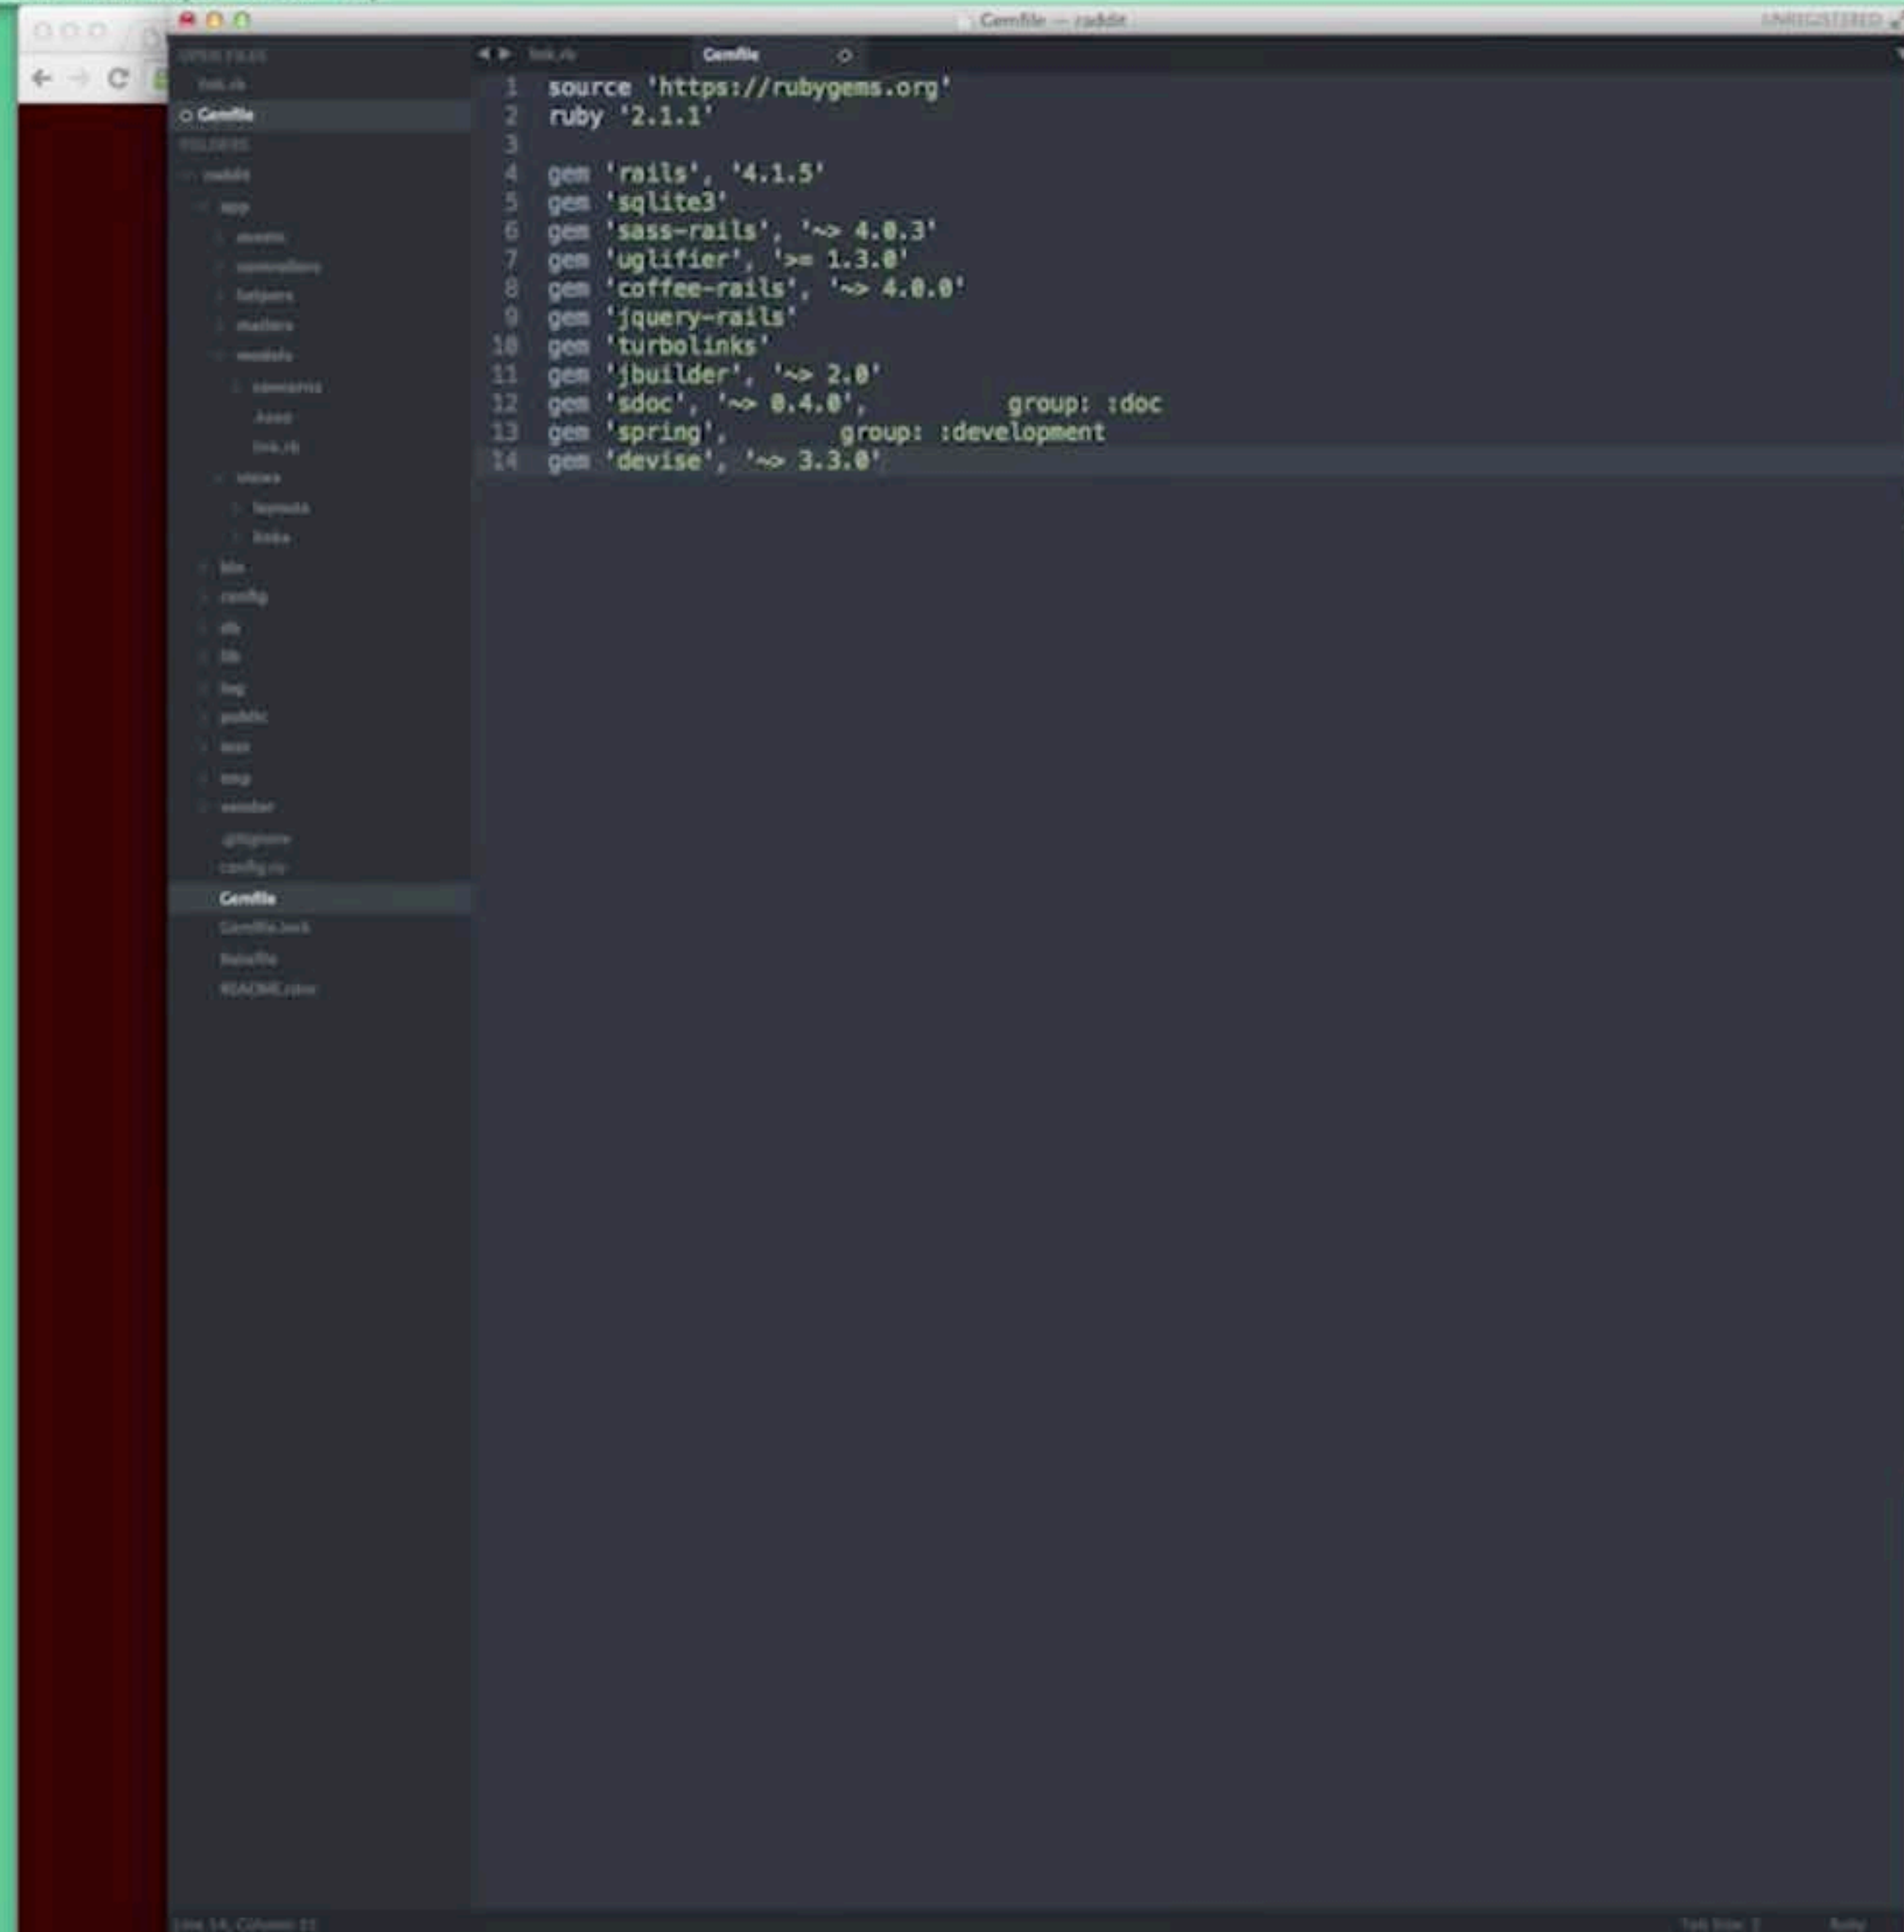


The screenshot shows the Sublime Text editor interface. On the left is a file explorer sidebar showing a project structure with folders like 'app', 'assets', 'config', 'db', 'lib', 'log', 'public', 'test', 'tmp', and 'vendor'. The main editor area displays a file named 'Gemfile' with the following content:

```
1 source 'https://rubygems.org'
2 ruby '2.1.1'
3
4 gem 'rails', '4.1.5'
5 gem 'sqlite3'
6 gem 'sass-rails', '~> 4.0.3'
7 gem 'uglifier', '>= 1.3.0'
8 gem 'coffee-rails', '~> 4.0.0'
9 gem 'jquery-rails'
10 gem 'turbolinks'
11 gem 'jbuilder', '~> 2.0'
12 gem 'sdoc', '~> 0.4.0', group: :doc
13 gem 'spring', group: :development
14 gem 'devise', '~> 3.3.0'
```

The status bar at the bottom indicates 'Line 14, Column 21'.

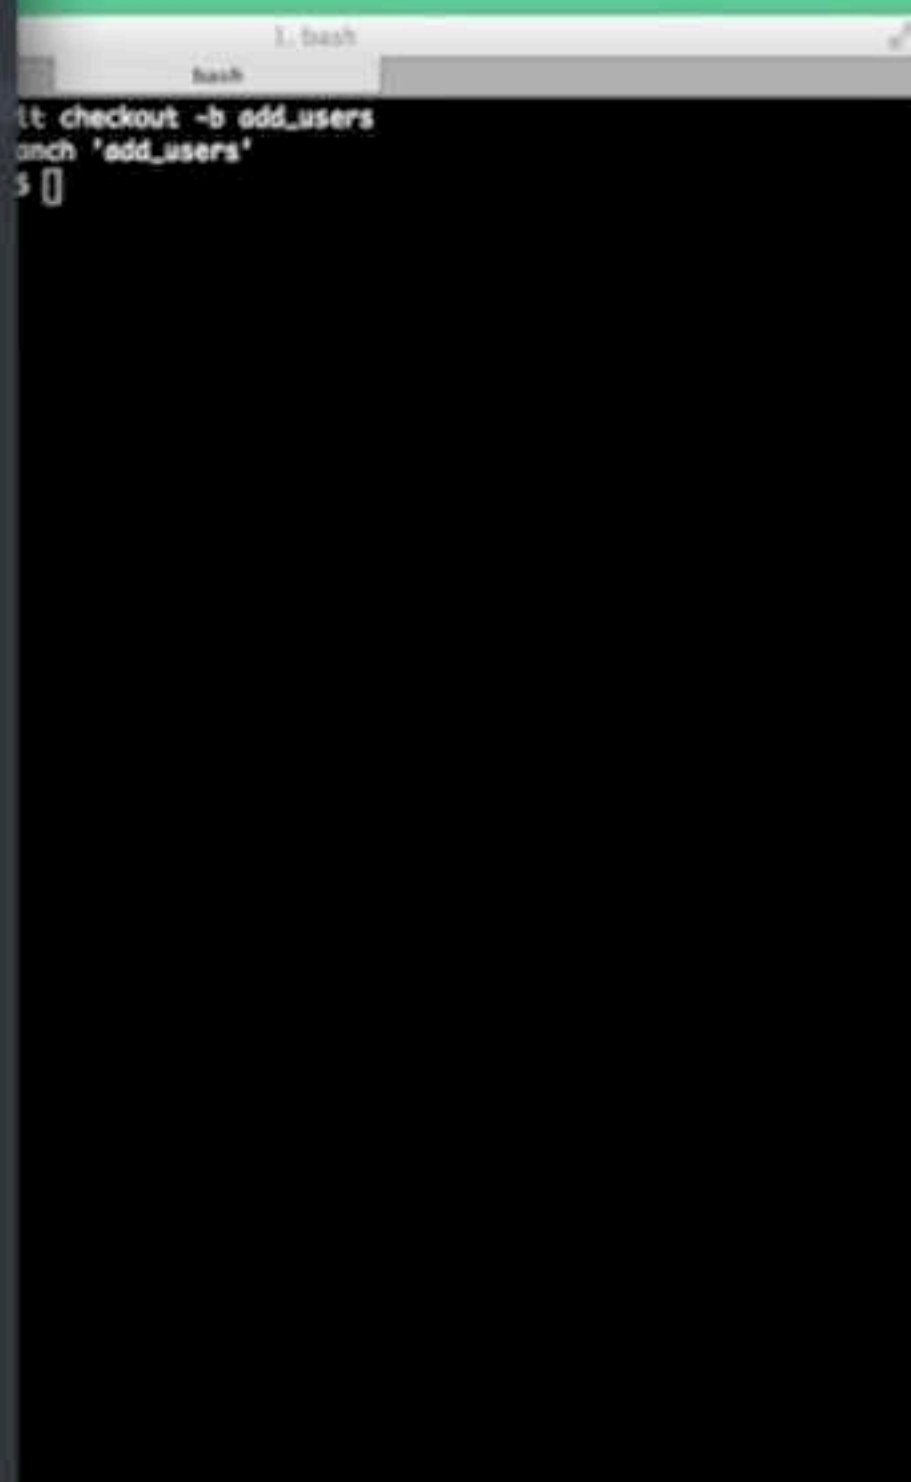

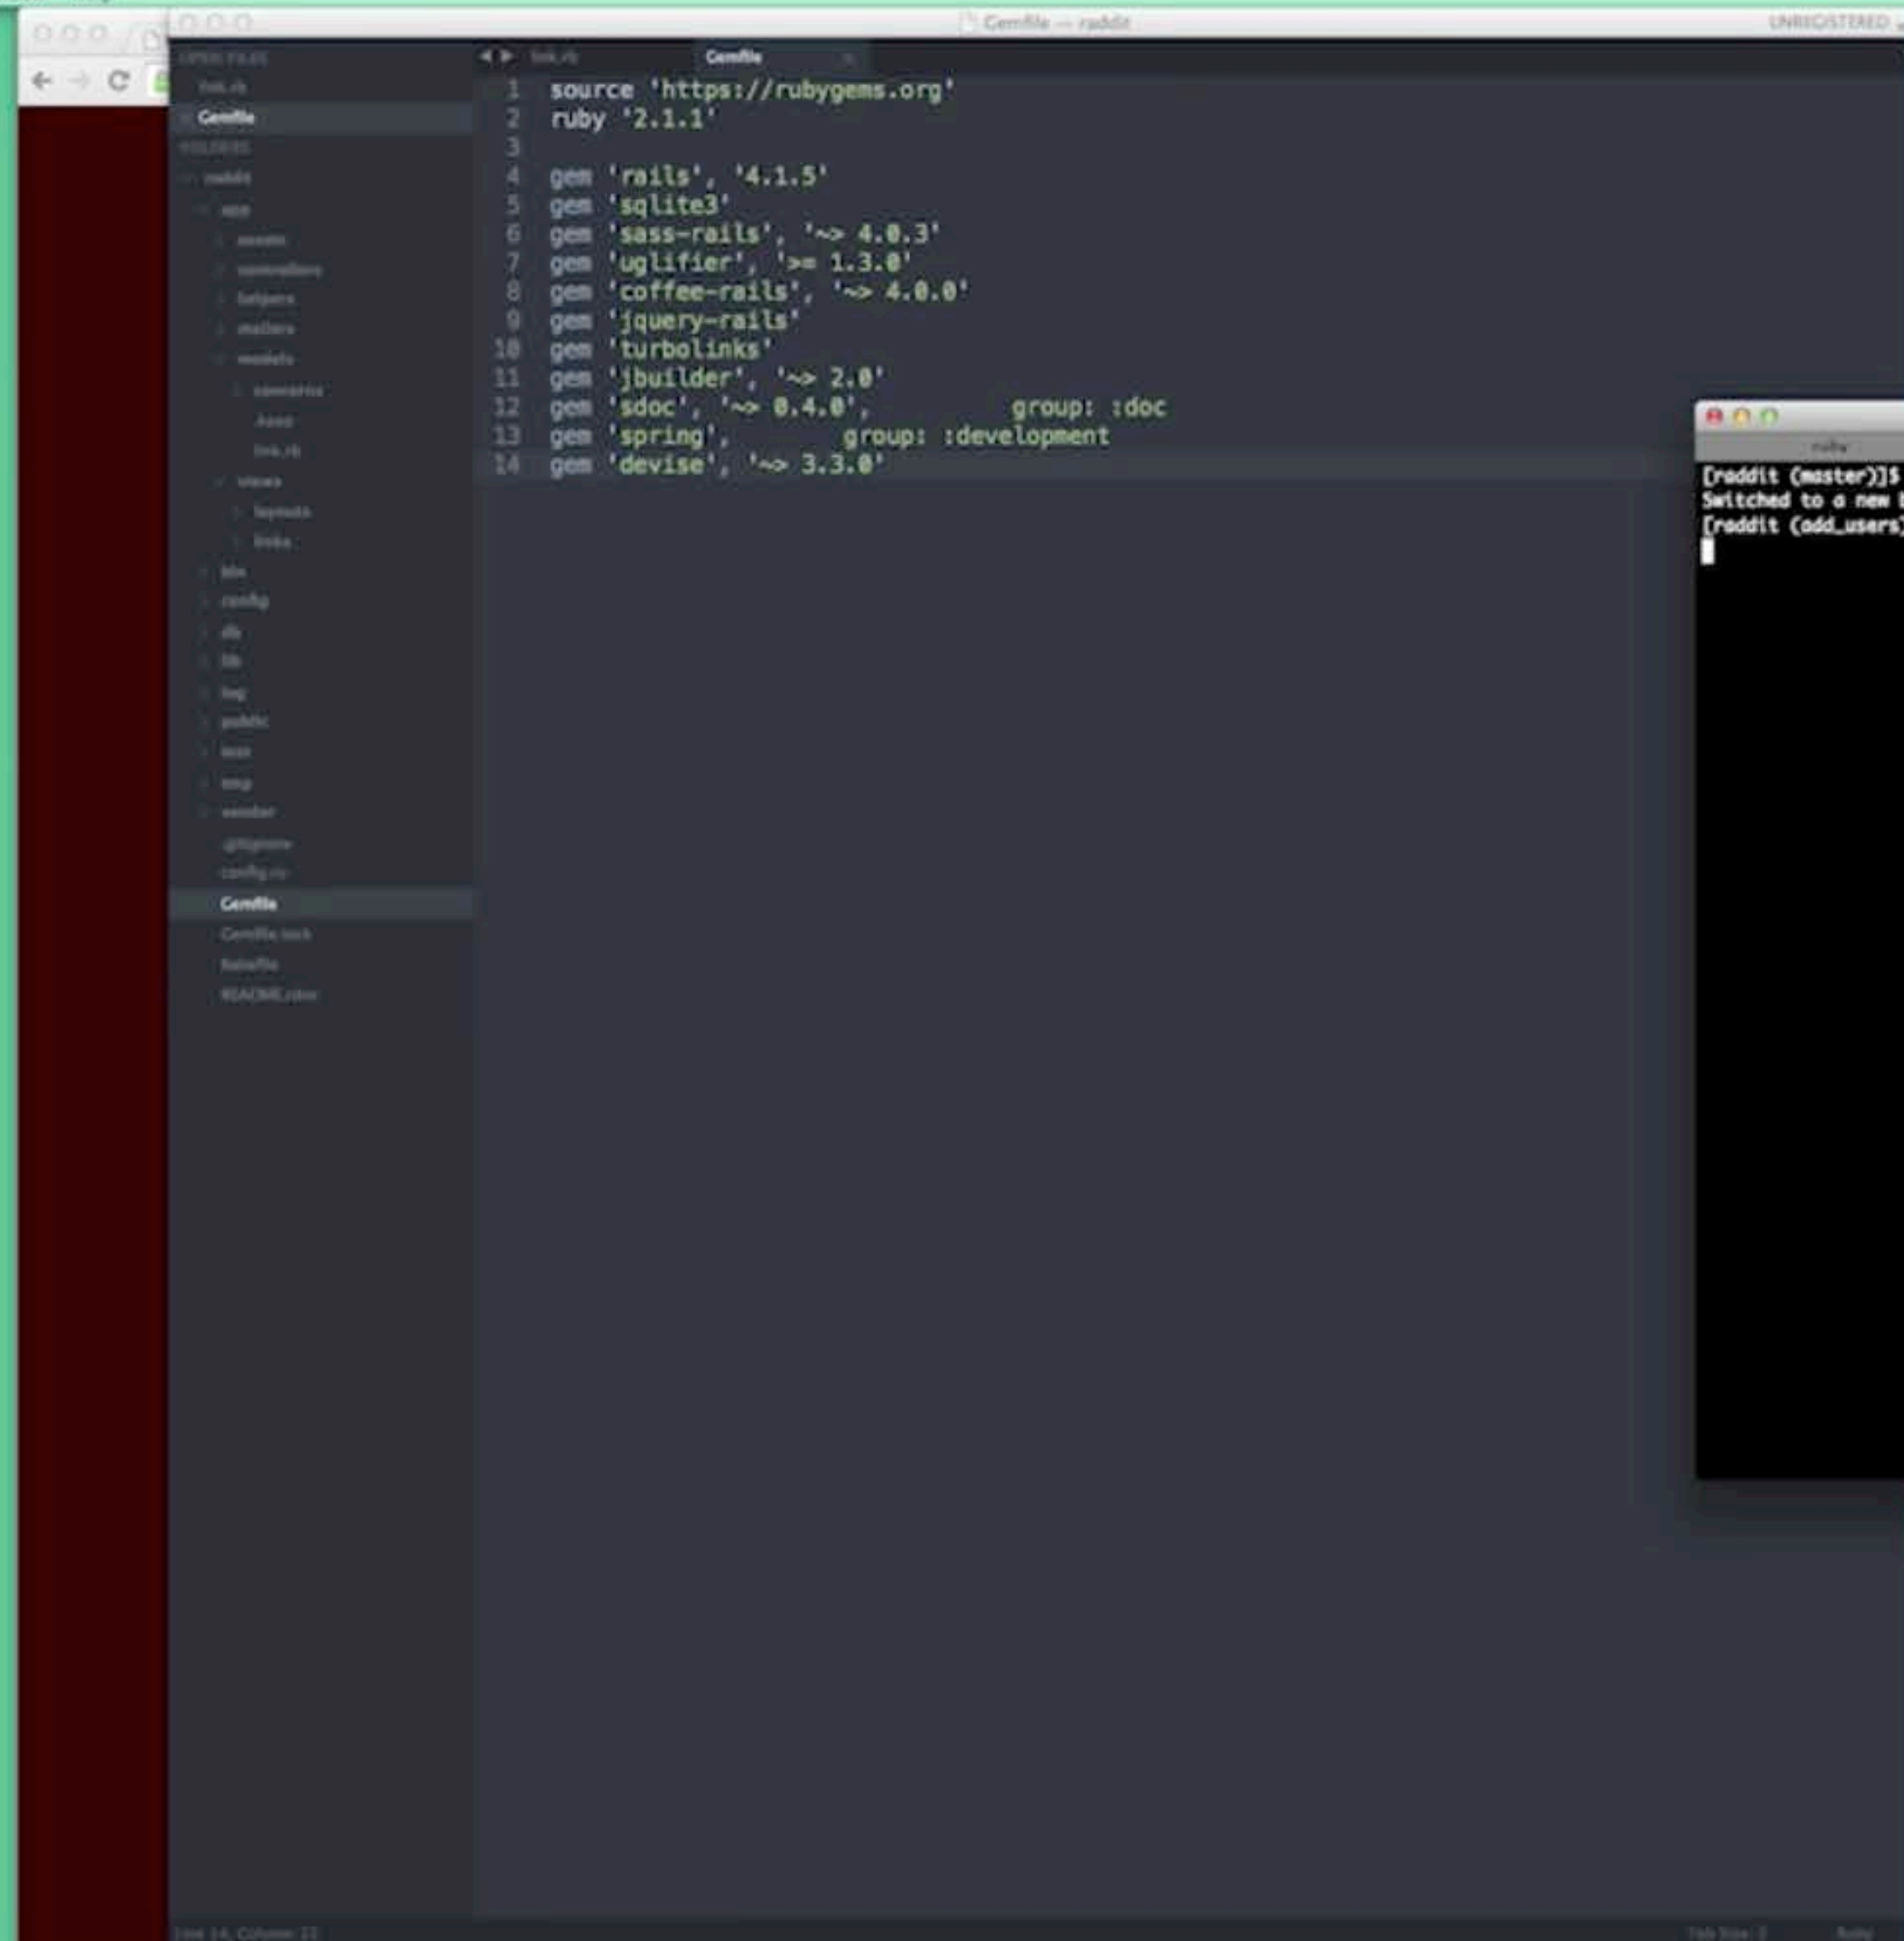

The screenshot shows a web browser window with the address bar displaying 'Gemfile - reddit'. The page content is a Ruby Gemfile for a project named 'reddit'. The file is located at 'link.rb'. The Gemfile contains the following code:

```
1 source 'https://rubygems.org'
2 ruby '2.1.1'
3
4 gem 'rails', '4.1.5'
5 gem 'sqlite3'
6 gem 'sass-rails', '~> 4.0.3'
7 gem 'uglifier', '>= 1.3.0'
8 gem 'coffee-rails', '~> 4.0.0'
9 gem 'jquery-rails'
10 gem 'turbolinks'
11 gem 'jbuilder', '~> 2.0'
12 gem 'sdoc', '~> 0.4.0', group: :doc
13 gem 'spring', group: :development
14 gem 'devise', '~> 3.3.0'
```

The browser's left sidebar shows a file explorer view with the following structure:

- link.rb
- Gemfile
- public
- app
- assets
- config
- db
- lib
- models
- views
- test
- tmp
- vendor
- gitignore
- config.ru
- Gemfile
- Gemfile.lock
- Rakefile
- README.rdoc

The status bar at the bottom of the browser window shows 'Line 14, Column 22'.



The screenshot shows a terminal window with the following commands and output:

```
[reddit (master)]$ git checkout -b add_users
Switched to a new branch 'add_users'
[reddit (add_users)]$ bundle install
```



A screenshot of a terminal window with a dark background. The title bar at the top reads "Gemfile - reddit". The terminal shows the execution of a series of commands to install Ruby on Rails and its dependencies. The commands are:  
1. `source 'https://rubygems.org'`  
2. `ruby '2.1.1'`  
3. (blank line)  
4. `gem 'rails', '4.1.5'`  
5. `gem 'sqlite3'`  
6. `gem 'sass-rails', '~> 4.0.3'`  
7. `gem 'uglifier', '>= 1.3.0'`  
8. `gem 'coffee-rails', '~> 4.0.0'`  
9. `gem 'jquery-rails'`  
10. `gem 'turbolinks'`  
11. `gem 'jbuilder', '~> 2.0'`  
12. `gem 'sdoc', '~> 0.4.0', group: :doc`  
13. `gem 'spring', group: :development`  
14. `gem 'devise', '~> 3.3.0'`  
The output of these commands is a list of gems being installed, including rack, rack-test, actionpack, mime-types, polyglot, treestop, mail, actionmailer, activemodel, arel, activerecord, bcrypt, coffee-script, execjs, coffee-rails, thor, railties, orm\_adapter, warden, devise, hike, multi\_json, jbuilder, jquery-rails, bundler, tilt, sprockets, sprockets-rails, rails, rdoc, sass, sass-rails, sdoc, spring, sqlite3, turbolinks, uglifier, and jbuilder. The output ends with "Your bundle is complete!" and instructions to use 'bundle show' and 'bundle exec'.

```
Using rack 1.5.2
Using rack-test 0.6.2
Using actionpack 4.1.5
Using mime-types 1.25.1
Using polyglot 0.3.5
Using tree-top 1.4.15
Using mail 2.5.4
Using actionmailer 4.1.5
Using activemodel 4.1.5
Using arel 5.0.1.28140414130214
Using activerecord 4.1.5
Using bcrypt 3.1.7
Using coffee-script-source 1.8.0
Using execjs 2.2.1
Using coffee-script 2.3.0
Using thor 0.19.1
Using railties 4.1.5
Using coffee-rails 4.0.1
Using orm_adapter 0.5.0
Using warden 1.2.3
Using devise 3.3.0
Using hike 1.2.3
Using multi_json 1.10.1
Using jbuilder 2.1.3
Using jquery-rails 3.1.2
Using bundler 1.7.2
Using tilt 1.4.1
Using sprockets 2.11.0
Using sprockets-rails 2.1.4
Using rails 4.1.5
Using rdoc 4.1.1
Using sass 3.2.19
Using sass-rails 4.0.3
Using sdock 0.4.1
Using spring 1.1.3
Using sqlite3 1.3.9
Using turbolinks 2.3.0
Using uglifier 2.5.3
Your bundle is complete!
Use 'bundle show [gemname]' to see where a bundled gem is installed.
[rabbit@odd-users]$
```

Rails

localhost:3000/links

## Listing links

Title	Url
Mackenzie's Website	http://mackenziechild.me
Twitter	http://twitter.com/mackenziechild

New Link

```


1 source 'https://rubygems.org'
2 ruby '2.1.1'
3
4 gem 'rails', '4.1.5'
5 gem 'sqlite3'
6 gem 'sass-rails', '~> 4.0.3'
7 gem 'uglifier', '>= 1.3.0'
8 gem 'coffee-rails', '~> 4.0.0'
9 gem 'jquery-rails'
10 gem 'turbolinks'
11 gem 'jbuilder', '~> 2.0'
12 gem 'sdoc', '~> 0.4.0', group: :doc
13 gem 'spring', group: :development
14 gem 'devise', '~> 3.3.0'
  
```

Line 14, Column 11

```

Using rack 1.5.2
Using rack-test 0.6.2
Using actionpack 4.1.5
Using mime-types 1.25.1
Using polyglot 0.3.5
Using treetop 1.4.15
Using mail 2.5.4
Using actionmailer 4.1.5
Using activemodel 4.1.5
Using arel 5.0.1.20140414130214
Using activerecord 4.1.5
Using bcrypt 3.1.7
Using coffee-script-source 1.8.0
Using exaccjs 2.2.1
Using coffee-script 2.3.0
Using thor 0.19.1
Using railties 4.1.5
Using coffee-rails 4.0.1
Using orm_adapter 0.5.0
Using warden 1.2.3
Using devise 3.3.0
Using hike 1.2.3
Using multi_json 1.10.1
Using jbuilder 2.1.3
Using jquery-rails 3.1.2
Using bundler 1.7.2
Using tilt 1.4.1
Using sprockets 2.11.0
Using sprockets-rails 2.1.4
Using rails 4.1.5
Using rdoc 4.1.1
Using sass 3.2.19
Using sass-rails 4.0.3
Using sdoc 0.4.1
Using spring 1.1.3
Using sqlite3 1.3.9
Using turbolinks 2.3.0
Using uglifier 2.5.3
Your bundle is complete!
Use 'bundle show [gemname]' to see where a bundled gem is installed.
[rails@add_users]$ rails g devise:install
  
```



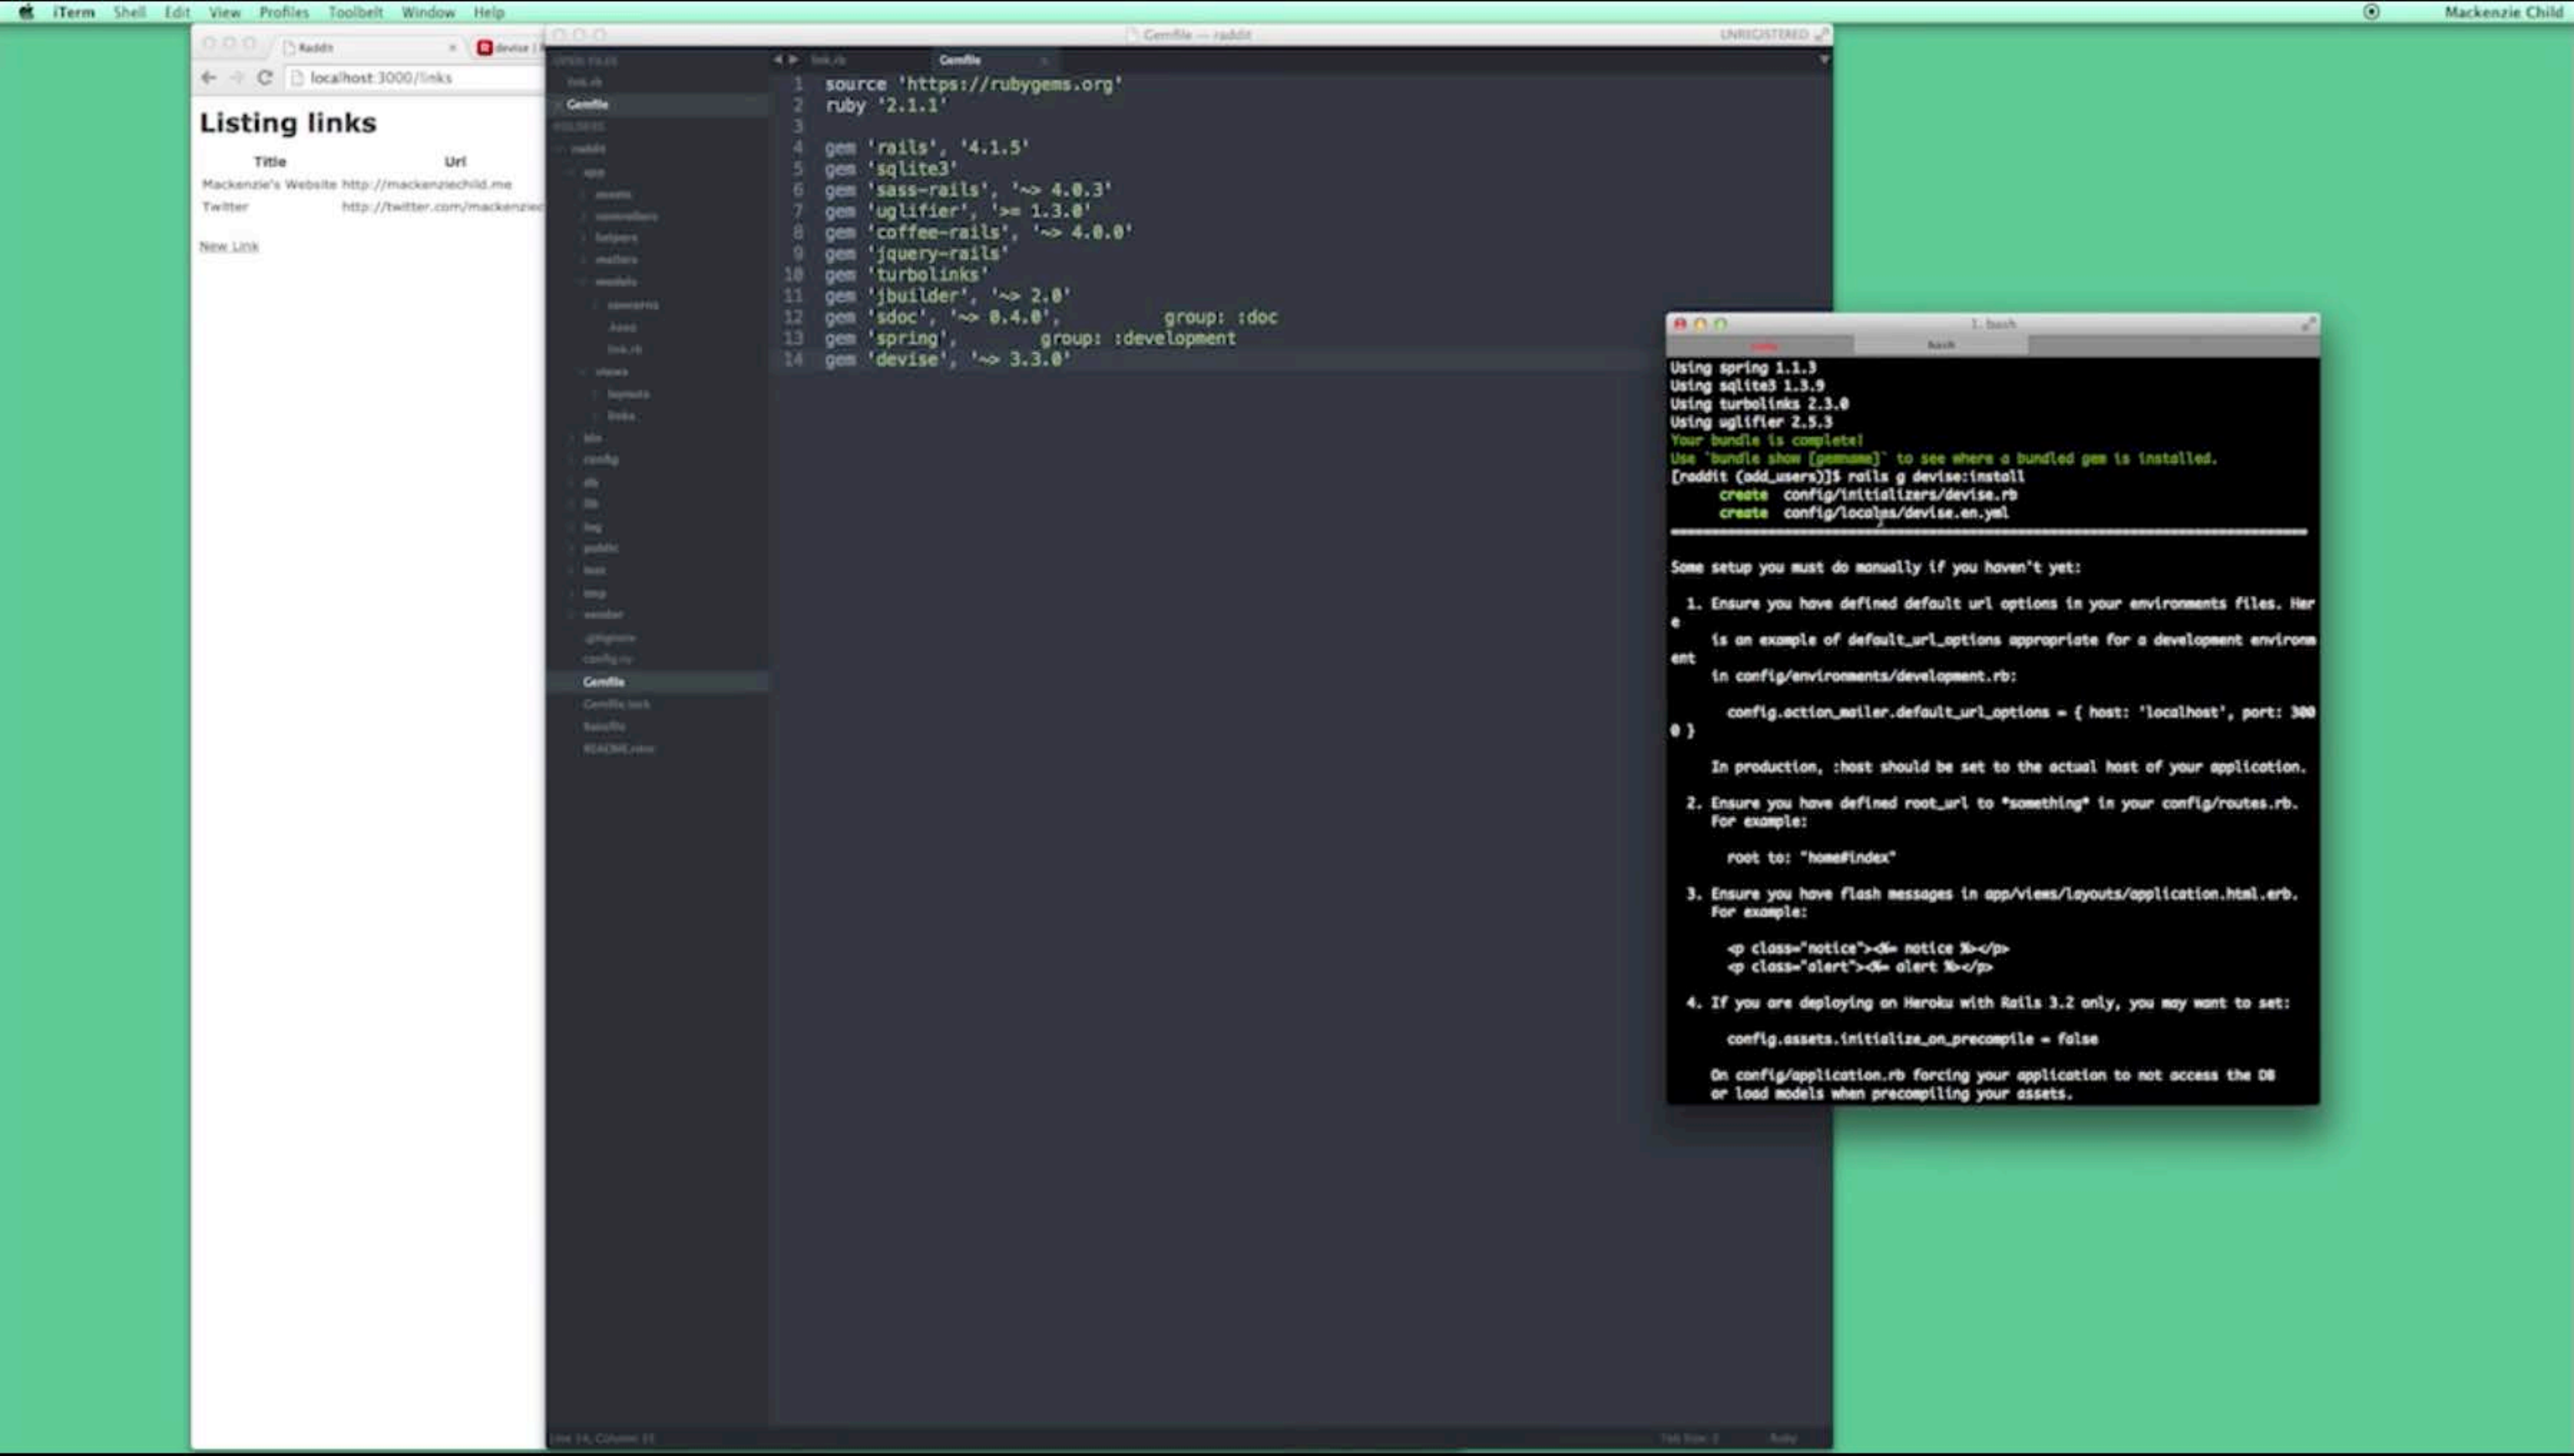

## Listing links

Title	Uri
Mackenzie's Website	http://mackenziechild.me
Twitter	http://twitter.com/mackenziechild

New Link

```
1 source 'https://rubygems.org'
2 ruby '2.1.1'
3
4 gem 'rails', '4.1.5'
5 gem 'sqlite3'
6 gem 'sass-rails', '~> 4.0.3'
7 gem 'uglifier', '>= 1.3.0'
8 gem 'coffee-rails', '~> 4.0.0'
9 gem 'jquery-rails'
10 gem 'turbolinks'
11 gem 'jbuilder', '~> 2.0'
12 gem 'sdock', '~> 0.4.0', group: :doc
13 gem 'spring', group: :development
14 gem 'devise', '~> 3.3.0'
```

```
Using spring 1.1.3
Using sqlite3 1.3.9
Using turbolinks 2.3.0
Using uglifier 2.5.3
Your bundle is complete!
Use 'bundle show [gemname]' to see where a bundled gem is installed.
[raddit (add_users)]$ rails g devise:install
  create config/initializers/devise.rb
  create config/locales/devise.en.yml
```

Some setup you must do manually if you haven't yet:

1. Ensure you have defined default url options in your environments files. Here is an example of default\_url\_options appropriate for a development environment in config/environments/development.rb:

```
config.action_mailer.default_url_options = { host: 'localhost', port: 3000 }
```

In production, :host should be set to the actual host of your application.

2. Ensure you have defined root\_url to \*something\* in your config/routes.rb. For example:

```
root to: "home#index"
```

3. Ensure you have flash messages in app/views/layouts/application.html.erb. For example:


```
<p class="notice"><%= notice %></p>
<p class="alert"><%= alert %></p>
```

4. If you are deploying on Heroku with Rails 3.2 only, you may want to set:


```
config.assets.initialize_on_precompile = false
```

On config/application.rb forcing your application to not access the DB or load models when precompiling your assets.



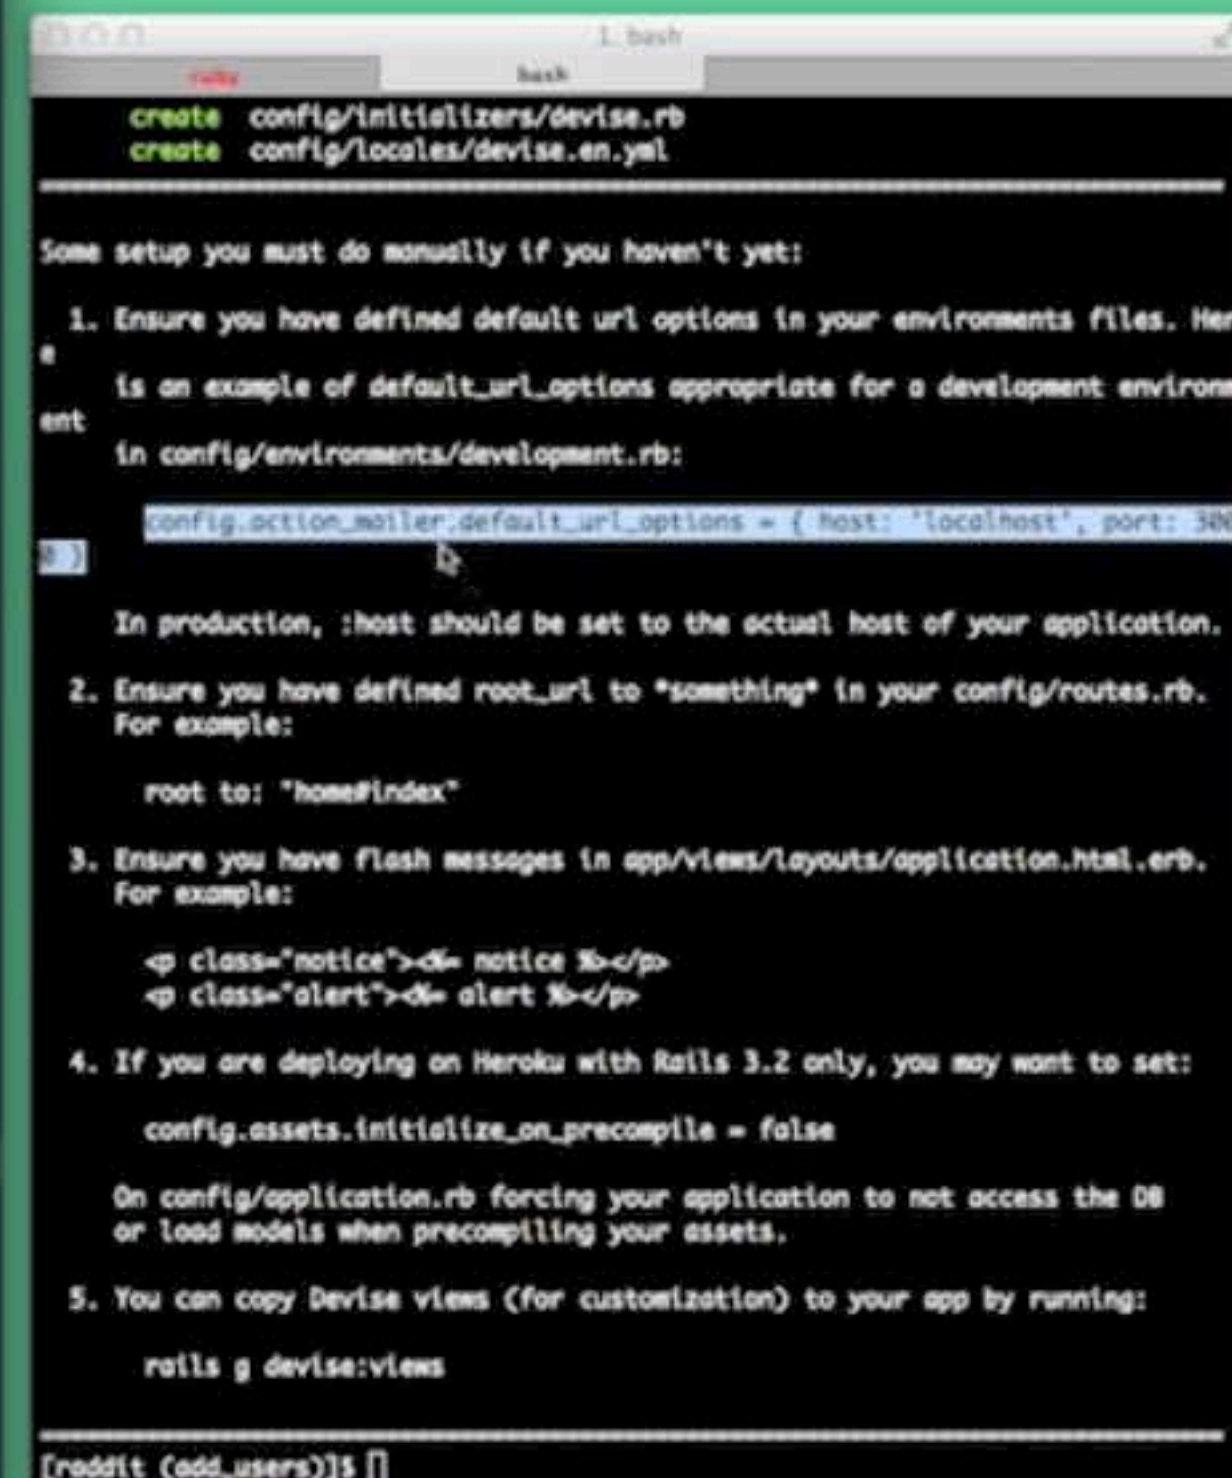



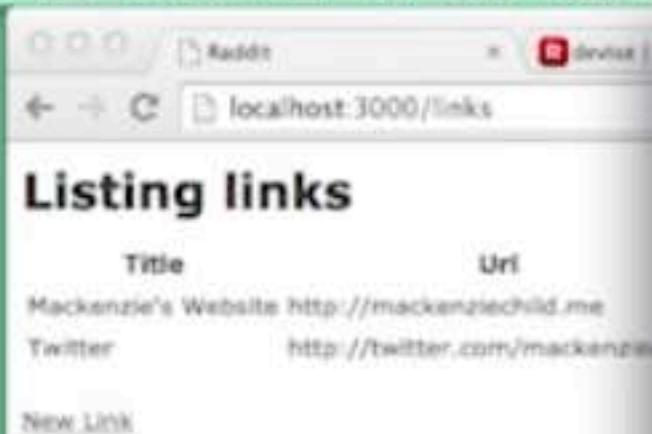

```

1 Rails.application.routes.draw do
2   resources :links
3
4   root to: "links#index"
5
6   # The priority is based upon order of creation: first created => highest priority.
7   # See how all your routes lay out with "rake routes".
8
9   # You can have the root of your site routed with "root"
10  # root 'welcome#index'
11
12  # Example of regular route:
13  # get 'products/:id' => 'catalog#view'
14
15  # Example of named route that can be invoked with purchase_url(id: product.id)
16  # get 'products/:id/purchase' => 'catalog#purchase', as: :purchase
17
18  # Example resource route (maps HTTP verbs to controller actions automatically):
19  # resources :products
20
21  # Example resource route with options:
22  # resources :products do
23  #   member do
24  #     get 'short'
25  #     post 'toggle'
26  #   end
27  #
28  #   collection do
29  #     get 'sold'
30  #   end
31  # end
32
33  # Example resource route with sub-resources:
34  # resources :products do
35  #   resources :comments, :sales
36  #   resource :seller
37  # end
38
39  # Example resource route with more complex sub-resources:
40  # resources :products do
41  #   resources :comments
42  #   resources :sales do
43  #     get 'recent', on: :collection
44  #   end
45  # end
46
47  # Example resource route with concerns:
48  # concern :toggleable do
49  #   post 'toggle'
50  # end
51  # resources :posts, concerns: :toggleable
52  # resources :photos, concerns: :toggleable
53
54  # Example resource route within a namespace:
55  # namespace :admin do
56  #   # Directs /admin/products/* to Admin::ProductsController
57  #   # (app/controllers/admin/products_controller.rb)
58  #   resources :products
59  # end
60 end
61

```

```

1. bash
create config/initializers/devise.rb
create config/locales/devise.en.yml

```

Some setup you must do manually if you haven't yet:

1. Ensure you have defined default url options in your environments files. Here is an example of default\_url\_options appropriate for a development environment in config/environments/development.rb:

```

config.action_mailer.default_url_options = { host: 'localhost', port: 3000 }

```

In production, :host should be set to the actual host of your application.
2. Ensure you have defined root\_url to \*something\* in your config/routes.rb. For example:

```

root to: 'home#index'

```
3. Ensure you have flash messages in app/views/layouts/application.html.erb. For example:

```

<%= notice %>
<%= alert %>

```
4. If you are deploying on Heroku with Rails 3.2 only, you may want to set:

```

config.assets.initialize_on_precompile = false

```

On config/application.rb forcing your application to not access the DB or load models when precompiling your assets.
5. You can copy Devise views (for customization) to your app by running:

```



rails g devise:views

```

```

[raddit (add_users)]$

```

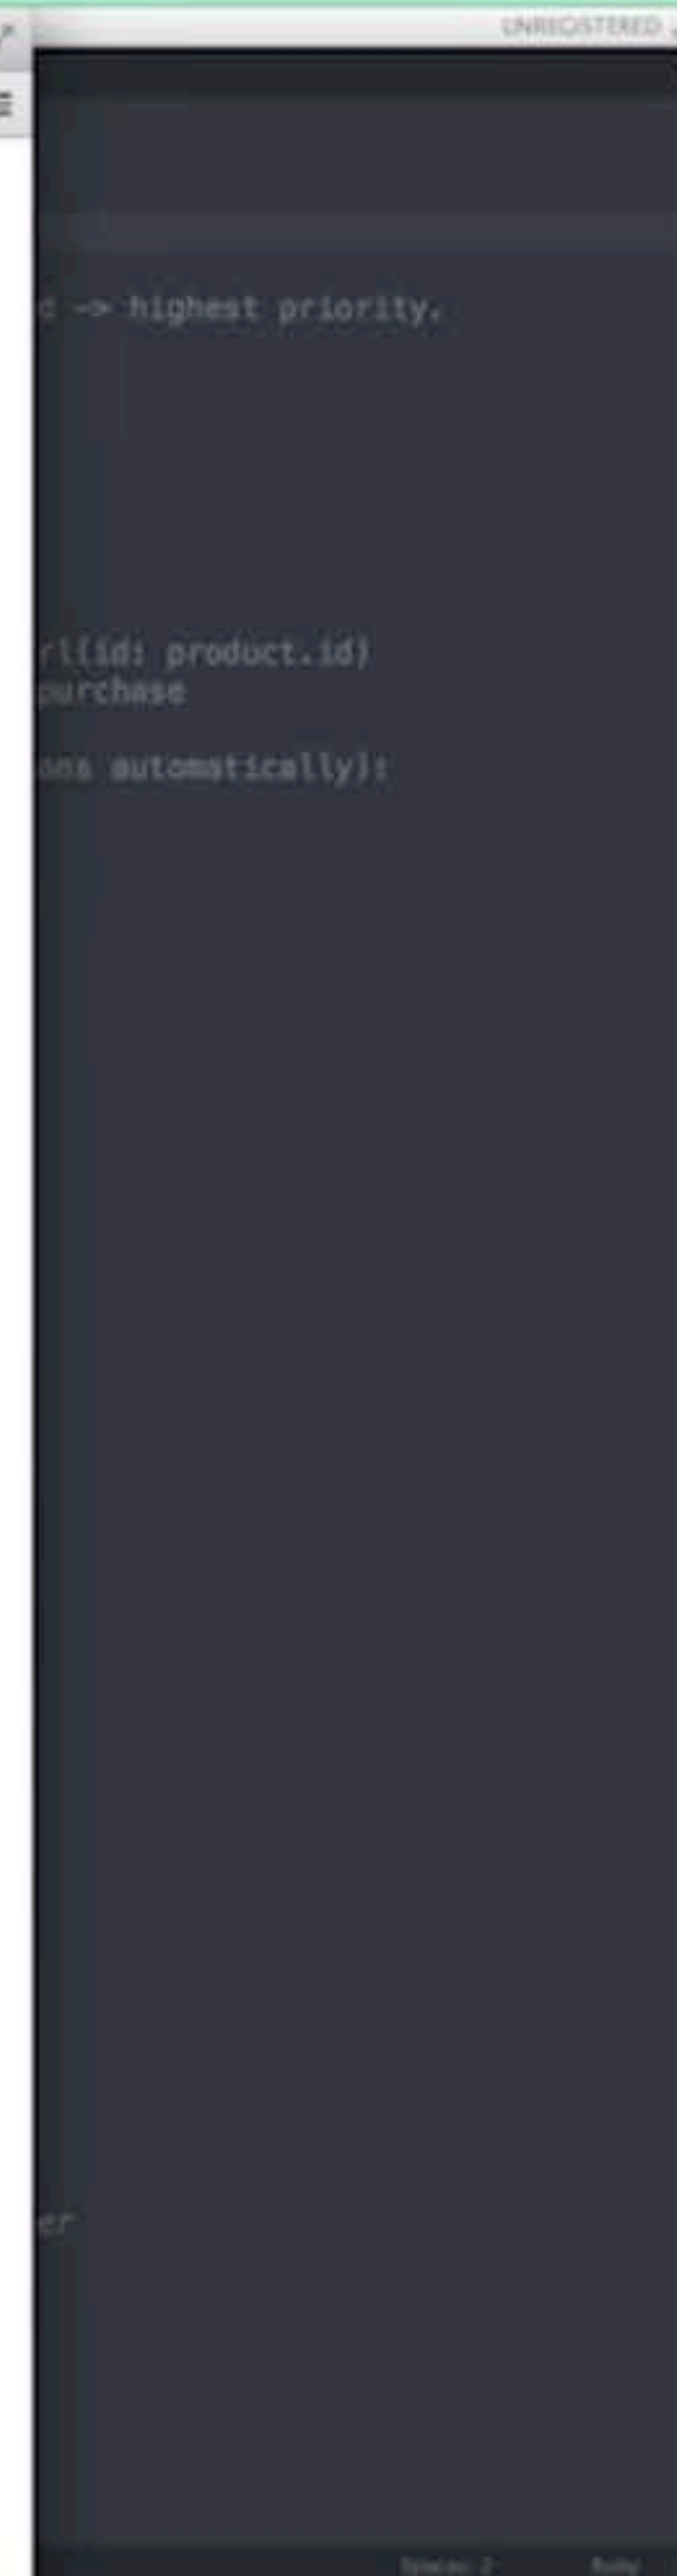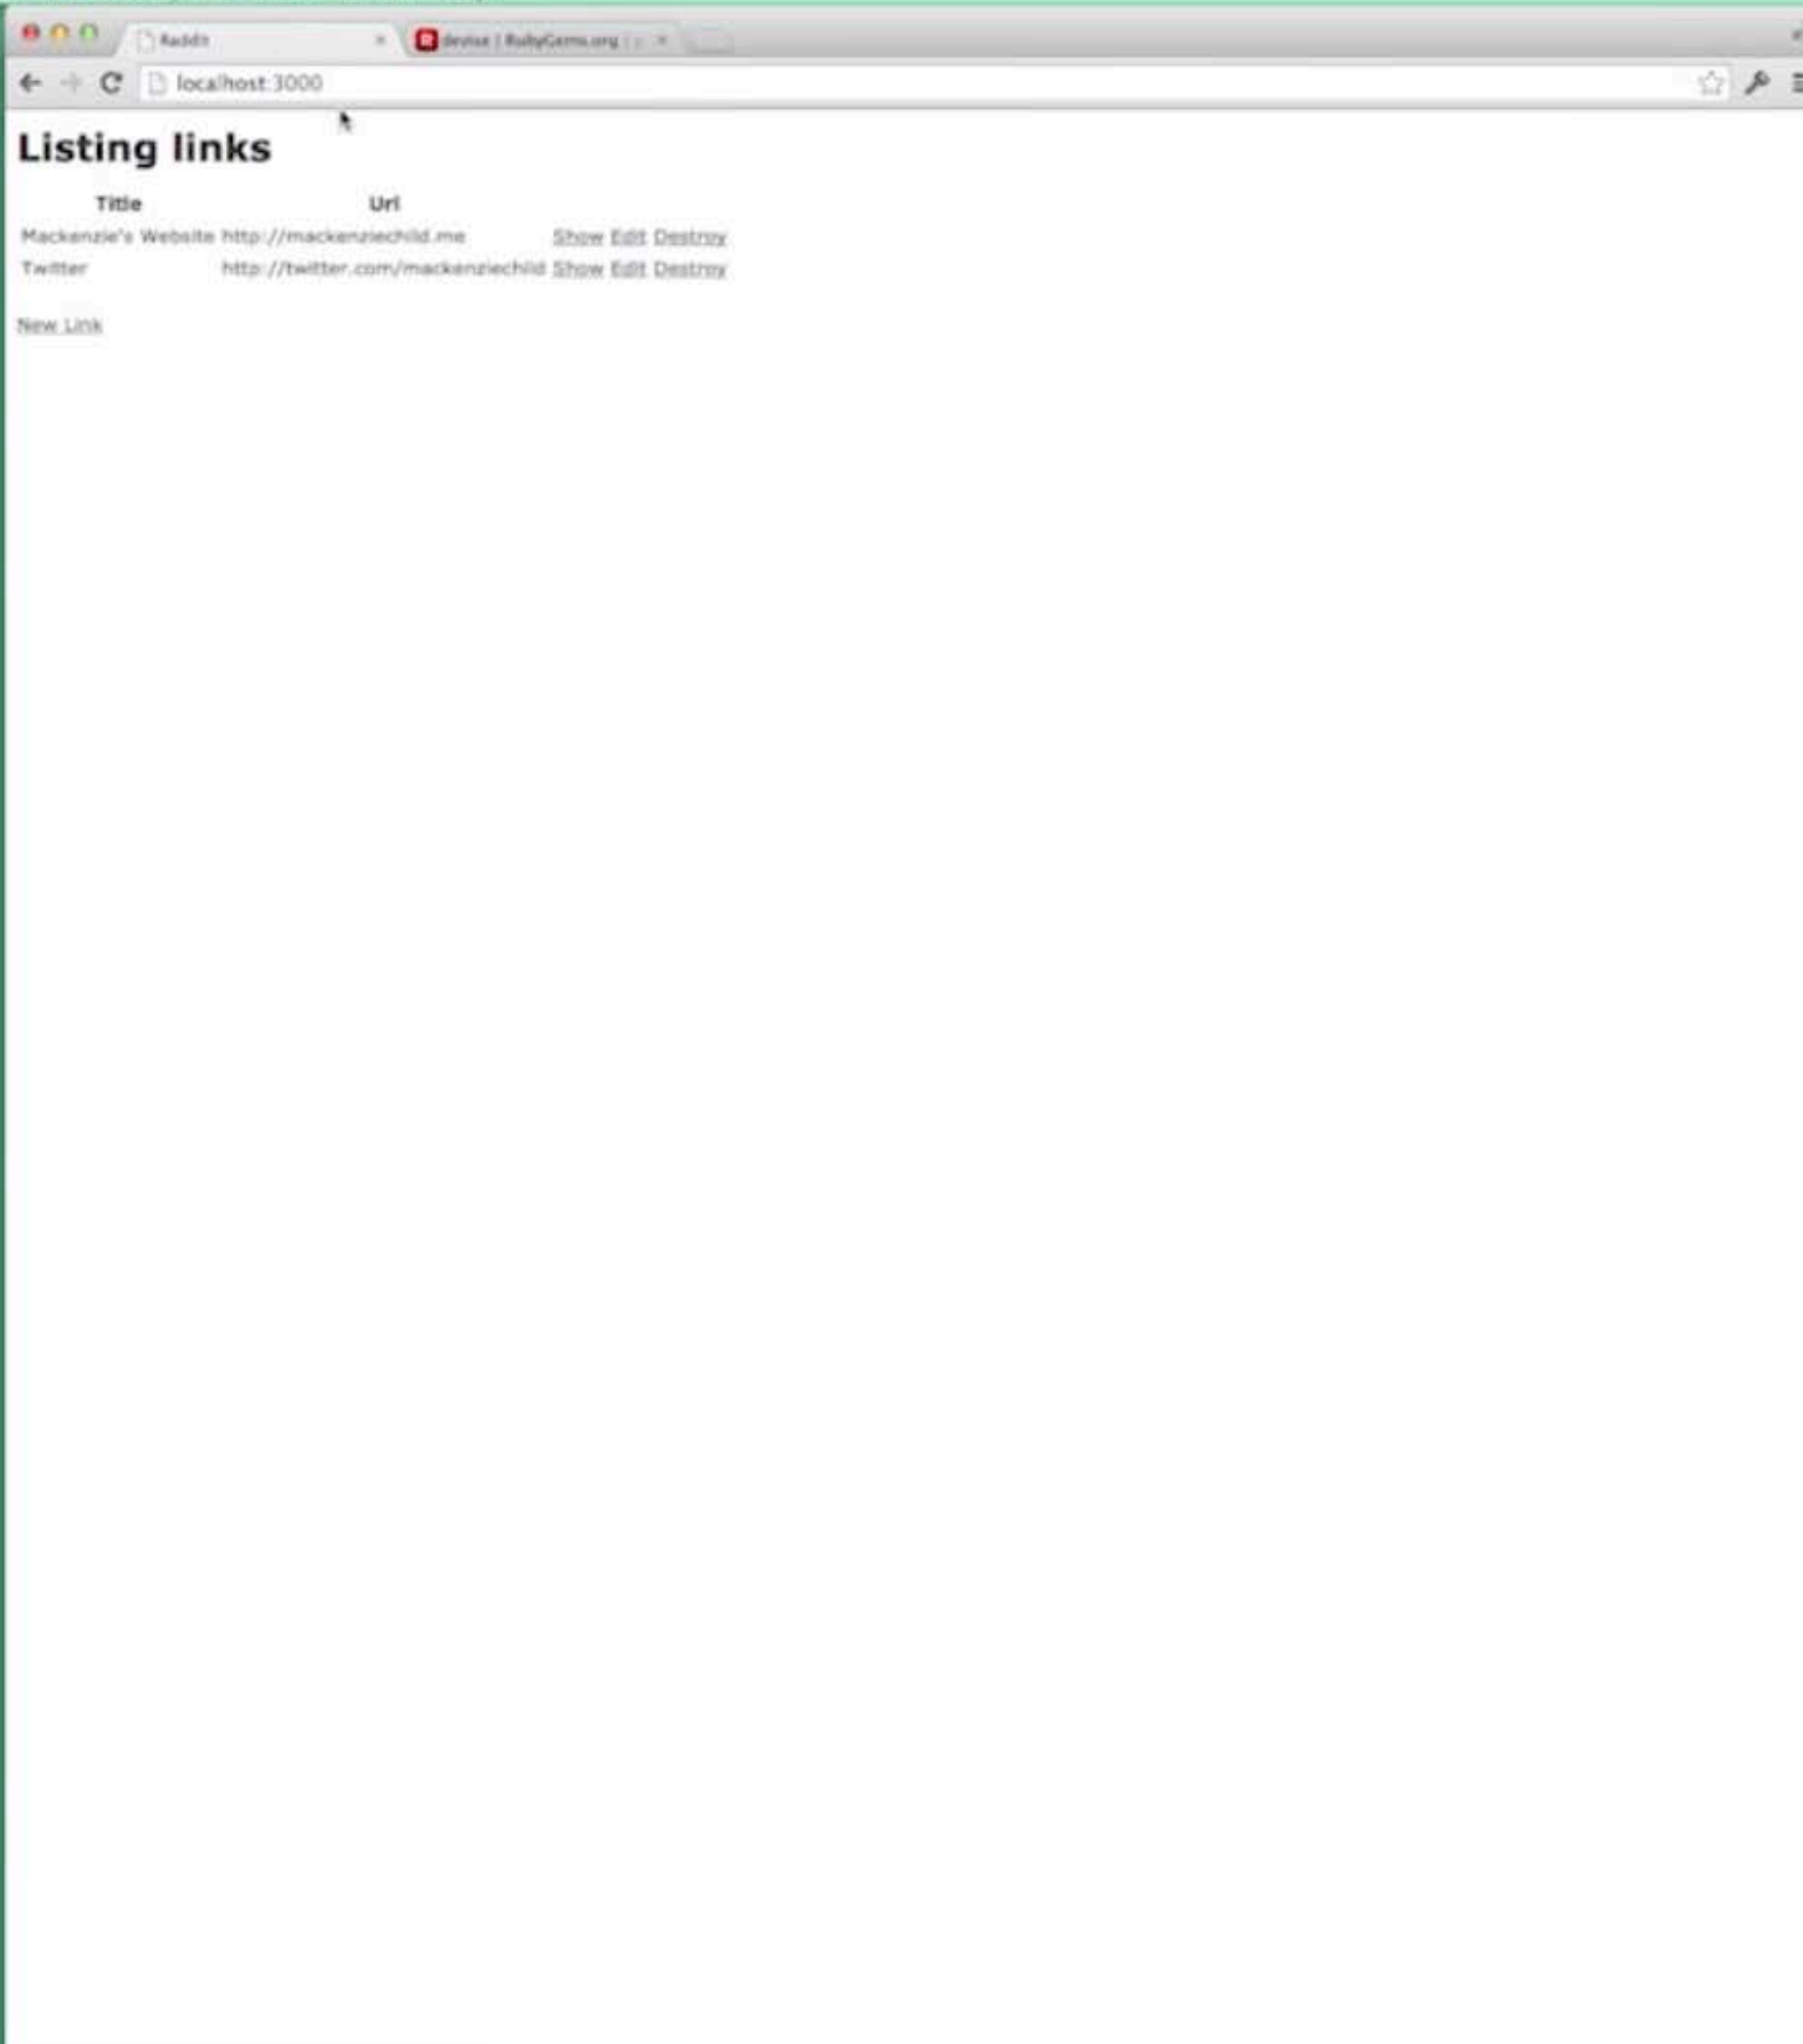



Raddit  
localhost:3000

## Listing links

Title	Uri
Mackenzie's Website	http://mackenziechild.me
Twitter	http://twitter.com/mackenziechild

New Link

```

1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>Raddit</title>
5   <%= stylesheet_link_tag 'application', media: 'all', 'data-turbolinks-track' => true %>
6   <%= javascript_include_tag 'application', 'data-turbolinks-track' => true %>
7   <%= csrf_meta_tags %>
8 </head>
9 <body>
10
11   <%= flash.each do |name, msg| %>
12     <%= content_tag(:div, msg, class: "alert alert-#{name}") %>
13   <%= end %>
14
15   <%= yield %>
16
17 </body>
18 </html>
19

```

```

1: bash
create config/initializers/devise.rb
create config/locales/devise.en.yml

```

---

Some setup you must do manually if you haven't yet:

1. Ensure you have defined default url options in your environments files. Here is an example of default\_url\_options appropriate for a development environment in config/environments/development.rb:

```

config.action_mailer.default_url_options = { host: 'localhost', port: 3000 }

```

In production, :host should be set to the actual host of your application.

2. Ensure you have defined root\_url to \*something\* in your config/routes.rb. For example:

```

root to: "home#index"

```

3. Ensure you have flash messages in app/views/layouts/application.html.erb. For example:

```

<p class="notice"><%= notice %></p>
<p class="alert"><%= alert %></p>

```

4. If you are deploying on Heroku with Rails 3.2 only, you may want to set:

```

config.assets.initialize_on_precompile = false

```

On config/application.rb forcing your application to not access the DB or load models when precompiling your assets.

5. You can copy Devise views (for customization) to your app by running:

```

rails g devise:views

```

---

```

[raddit (add_users)]$ 

```

Raddit

localhost:3000

## Listing links

Title	Url
Mackenzie's Website	http://mackenziechild.me
Twitter	http://twitter.com/mackenziechild

New Link

```

1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>Raddit</title>
5   <%= stylesheet_link_tag 'application', media: 'all', 'data-turbolinks-track' => true %>
6   <%= javascript_include_tag 'application', 'data-turbolinks-track' => true %>
7   <%= csrf_meta_tags %>
8 </head>
9 <body>
10
11   <%= flash.each do |name, msg| %>
12     <%= content_tag(:div, msg, class: "alert alert-#{name}") %>
13   <%= end %>
14
15   <%= yield %>
16
17 </body>
18 </html>
19

```

Line 12, Column 57

1. Bash

3. Ensure you have flash messages in app/views/layouts/application.html.erb. For example:

```

<%= notice %>
<%= alert %>

```

4. If you are deploying on Heroku with Rails 3.2 only, you may want to set:

```

config.assets.initialize_on_precompile = false

```

On config/application.rb forcing your application to not access the DB or load models when precompiling your assets.

5. You can copy Devise views (for customization) to your app by running:

```

rails g devise:views

```


---

```

[raddit (add_users)]$ rails g devise:views
invoke  Devise::Generators::SharedViewsGenerator
create  app/views/devise/shared
create  app/views/devise/shared/_links.erb
invoke  form_for
create  app/views/devise/confirmations
create  app/views/devise/confirmations/new.html.erb
create  app/views/devise/passwords
create  app/views/devise/passwords/edit.html.erb
create  app/views/devise/passwords/new.html.erb
create  app/views/devise/registrations
create  app/views/devise/registrations/edit.html.erb
create  app/views/devise/registrations/new.html.erb
create  app/views/devise/sessions
create  app/views/devise/sessions/new.html.erb
create  app/views/devise/unlocks
create  app/views/devise/unlocks/new.html.erb
invoke  erb
create  app/views/devise/mailer
create  app/views/devise/mailer/confirmation_instructions.html.erb
create  app/views/devise/mailer/reset_password_instructions.html.erb
create  app/views/devise/mailer/unlock_instructions.html.erb
[raddit (add_users)]$

```



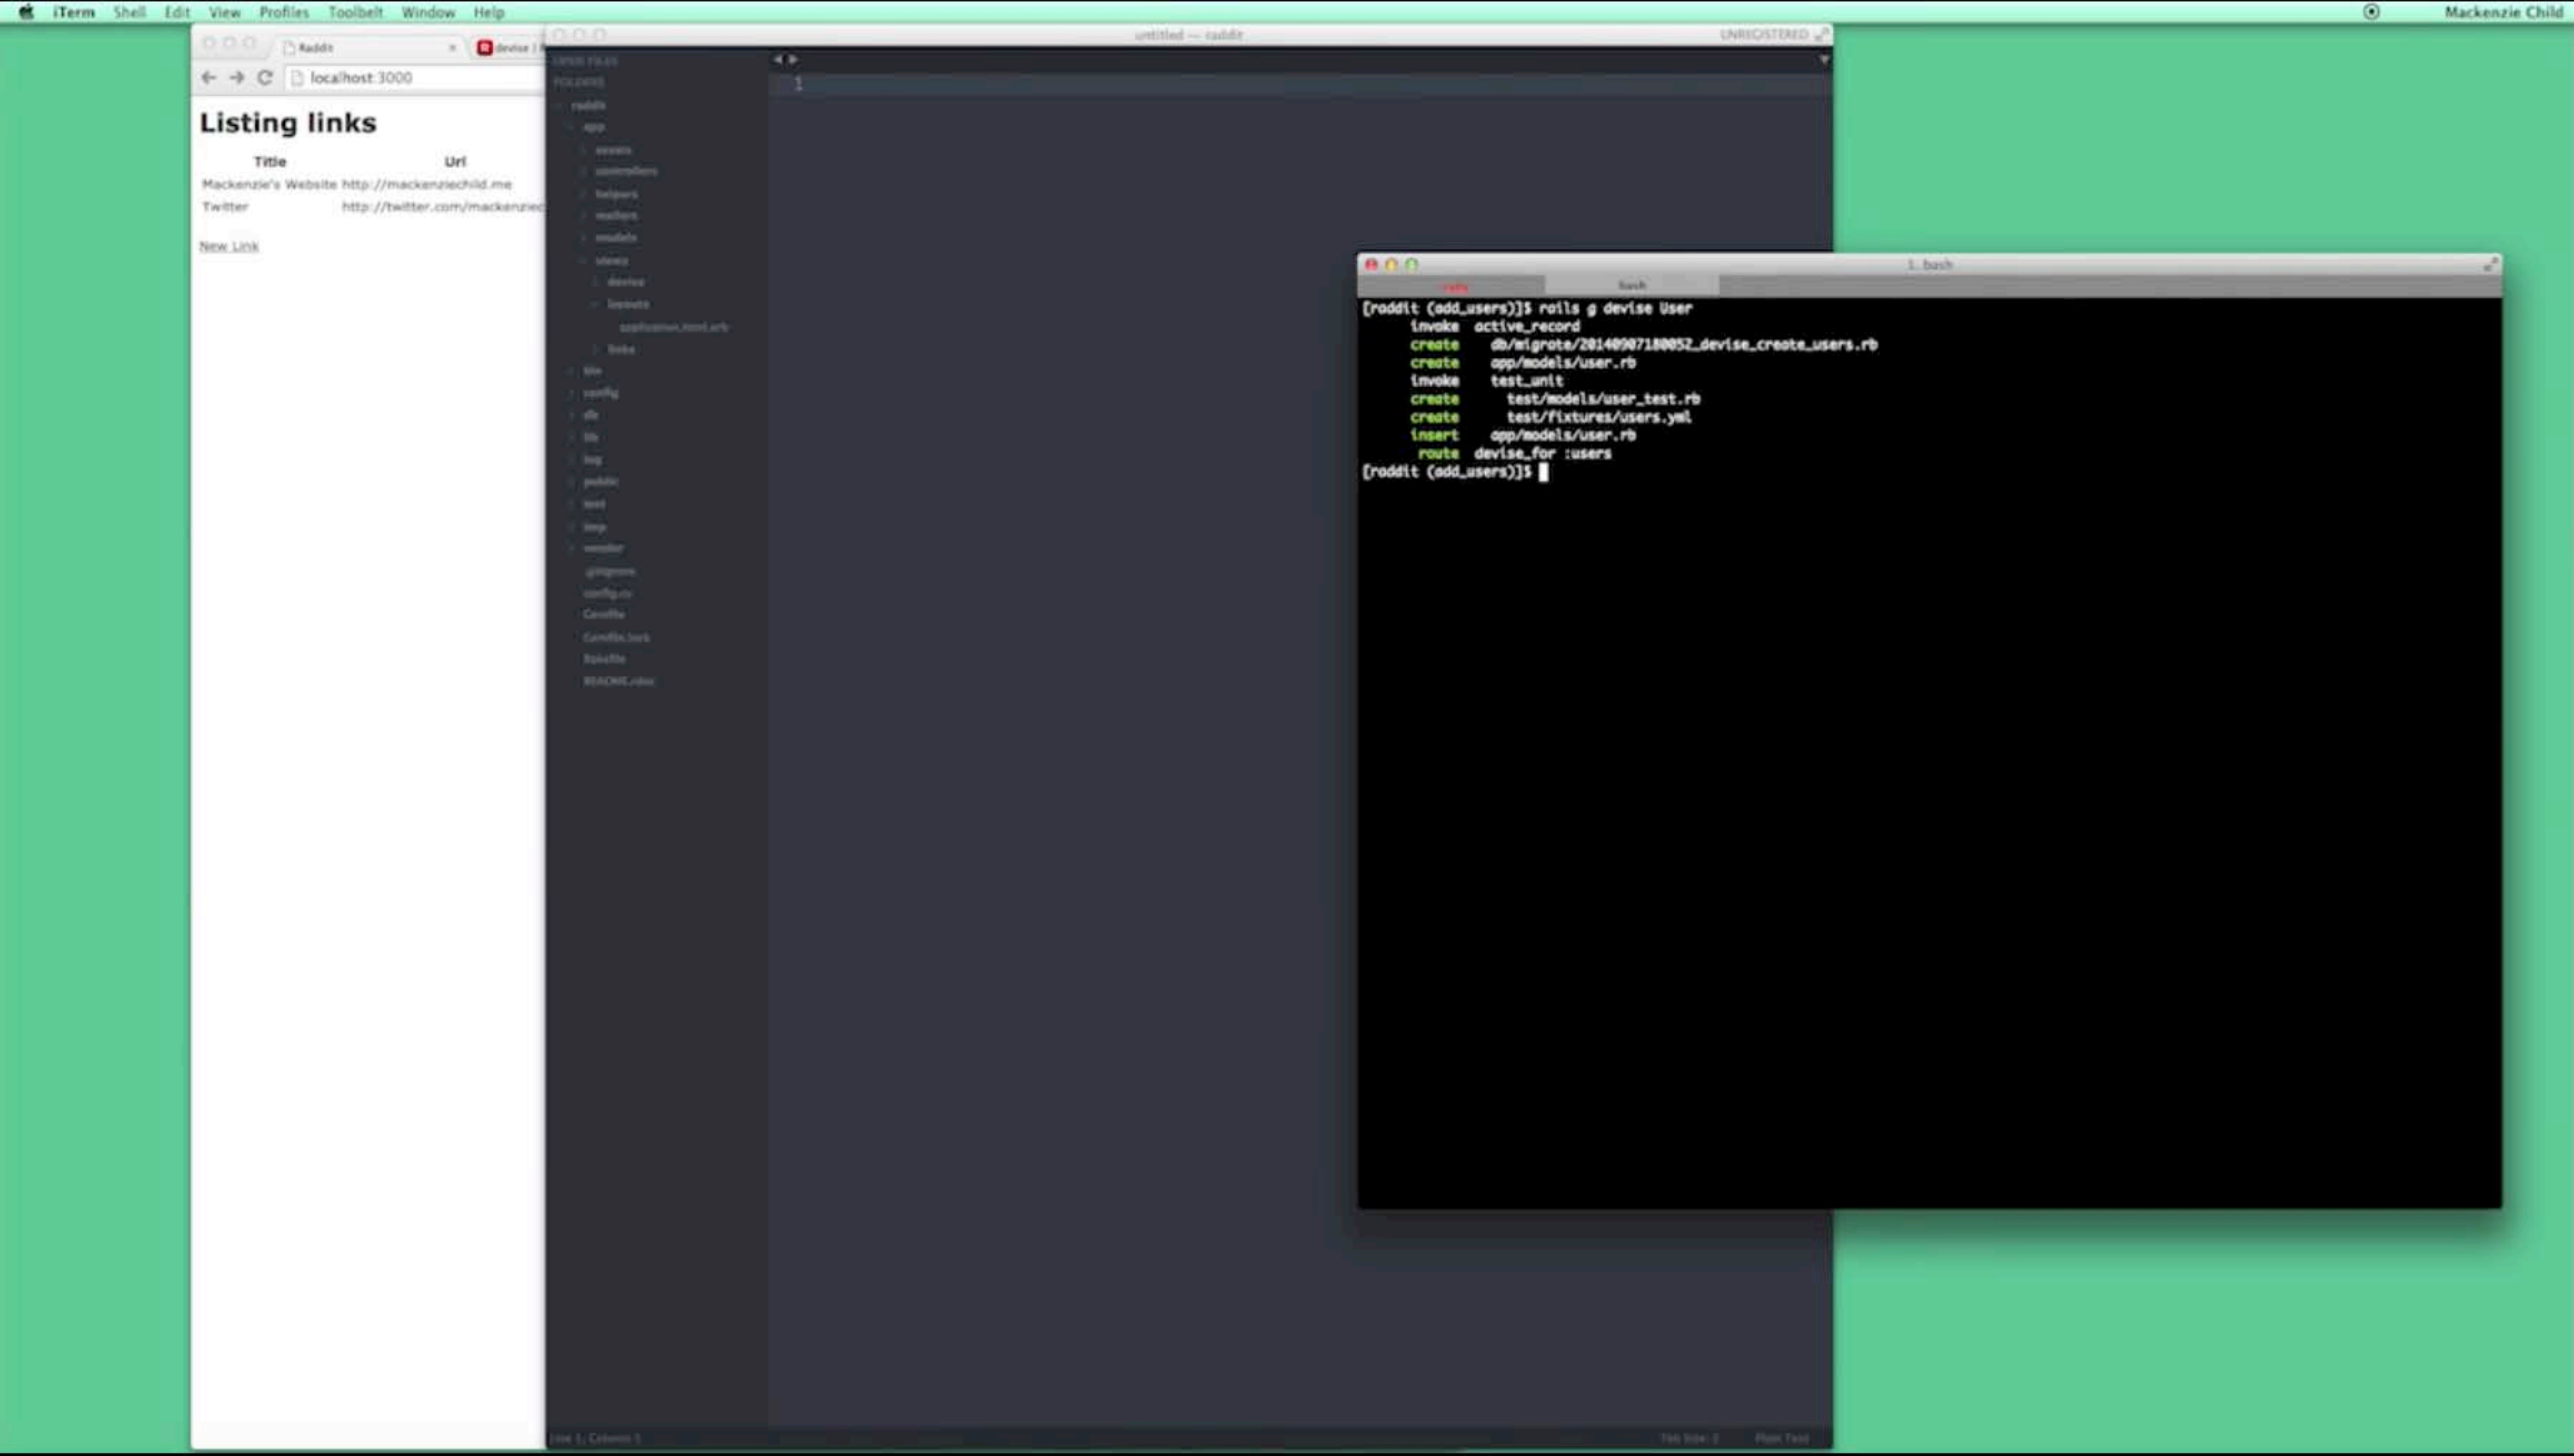


## Listing links

Title	Url
Mackenzie's Website	<a href="http://mackenziechild.me">http://mackenziechild.me</a>
Twitter	<a href="http://twitter.com/mackenziechild">http://twitter.com/mackenziechild</a>

New Link

```
[roddit (add_users)]$ rails g devise User
invoke  active_record
create  db/migrate/20140907180052_devise_create_users.rb
create  app/models/user.rb
invoke  test_unit
create  test/models/user_test.rb
create  test/fixtures/users.yml
insert  app/models/user.rb
route  devise_for :users
[roddit (add_users)]$
```

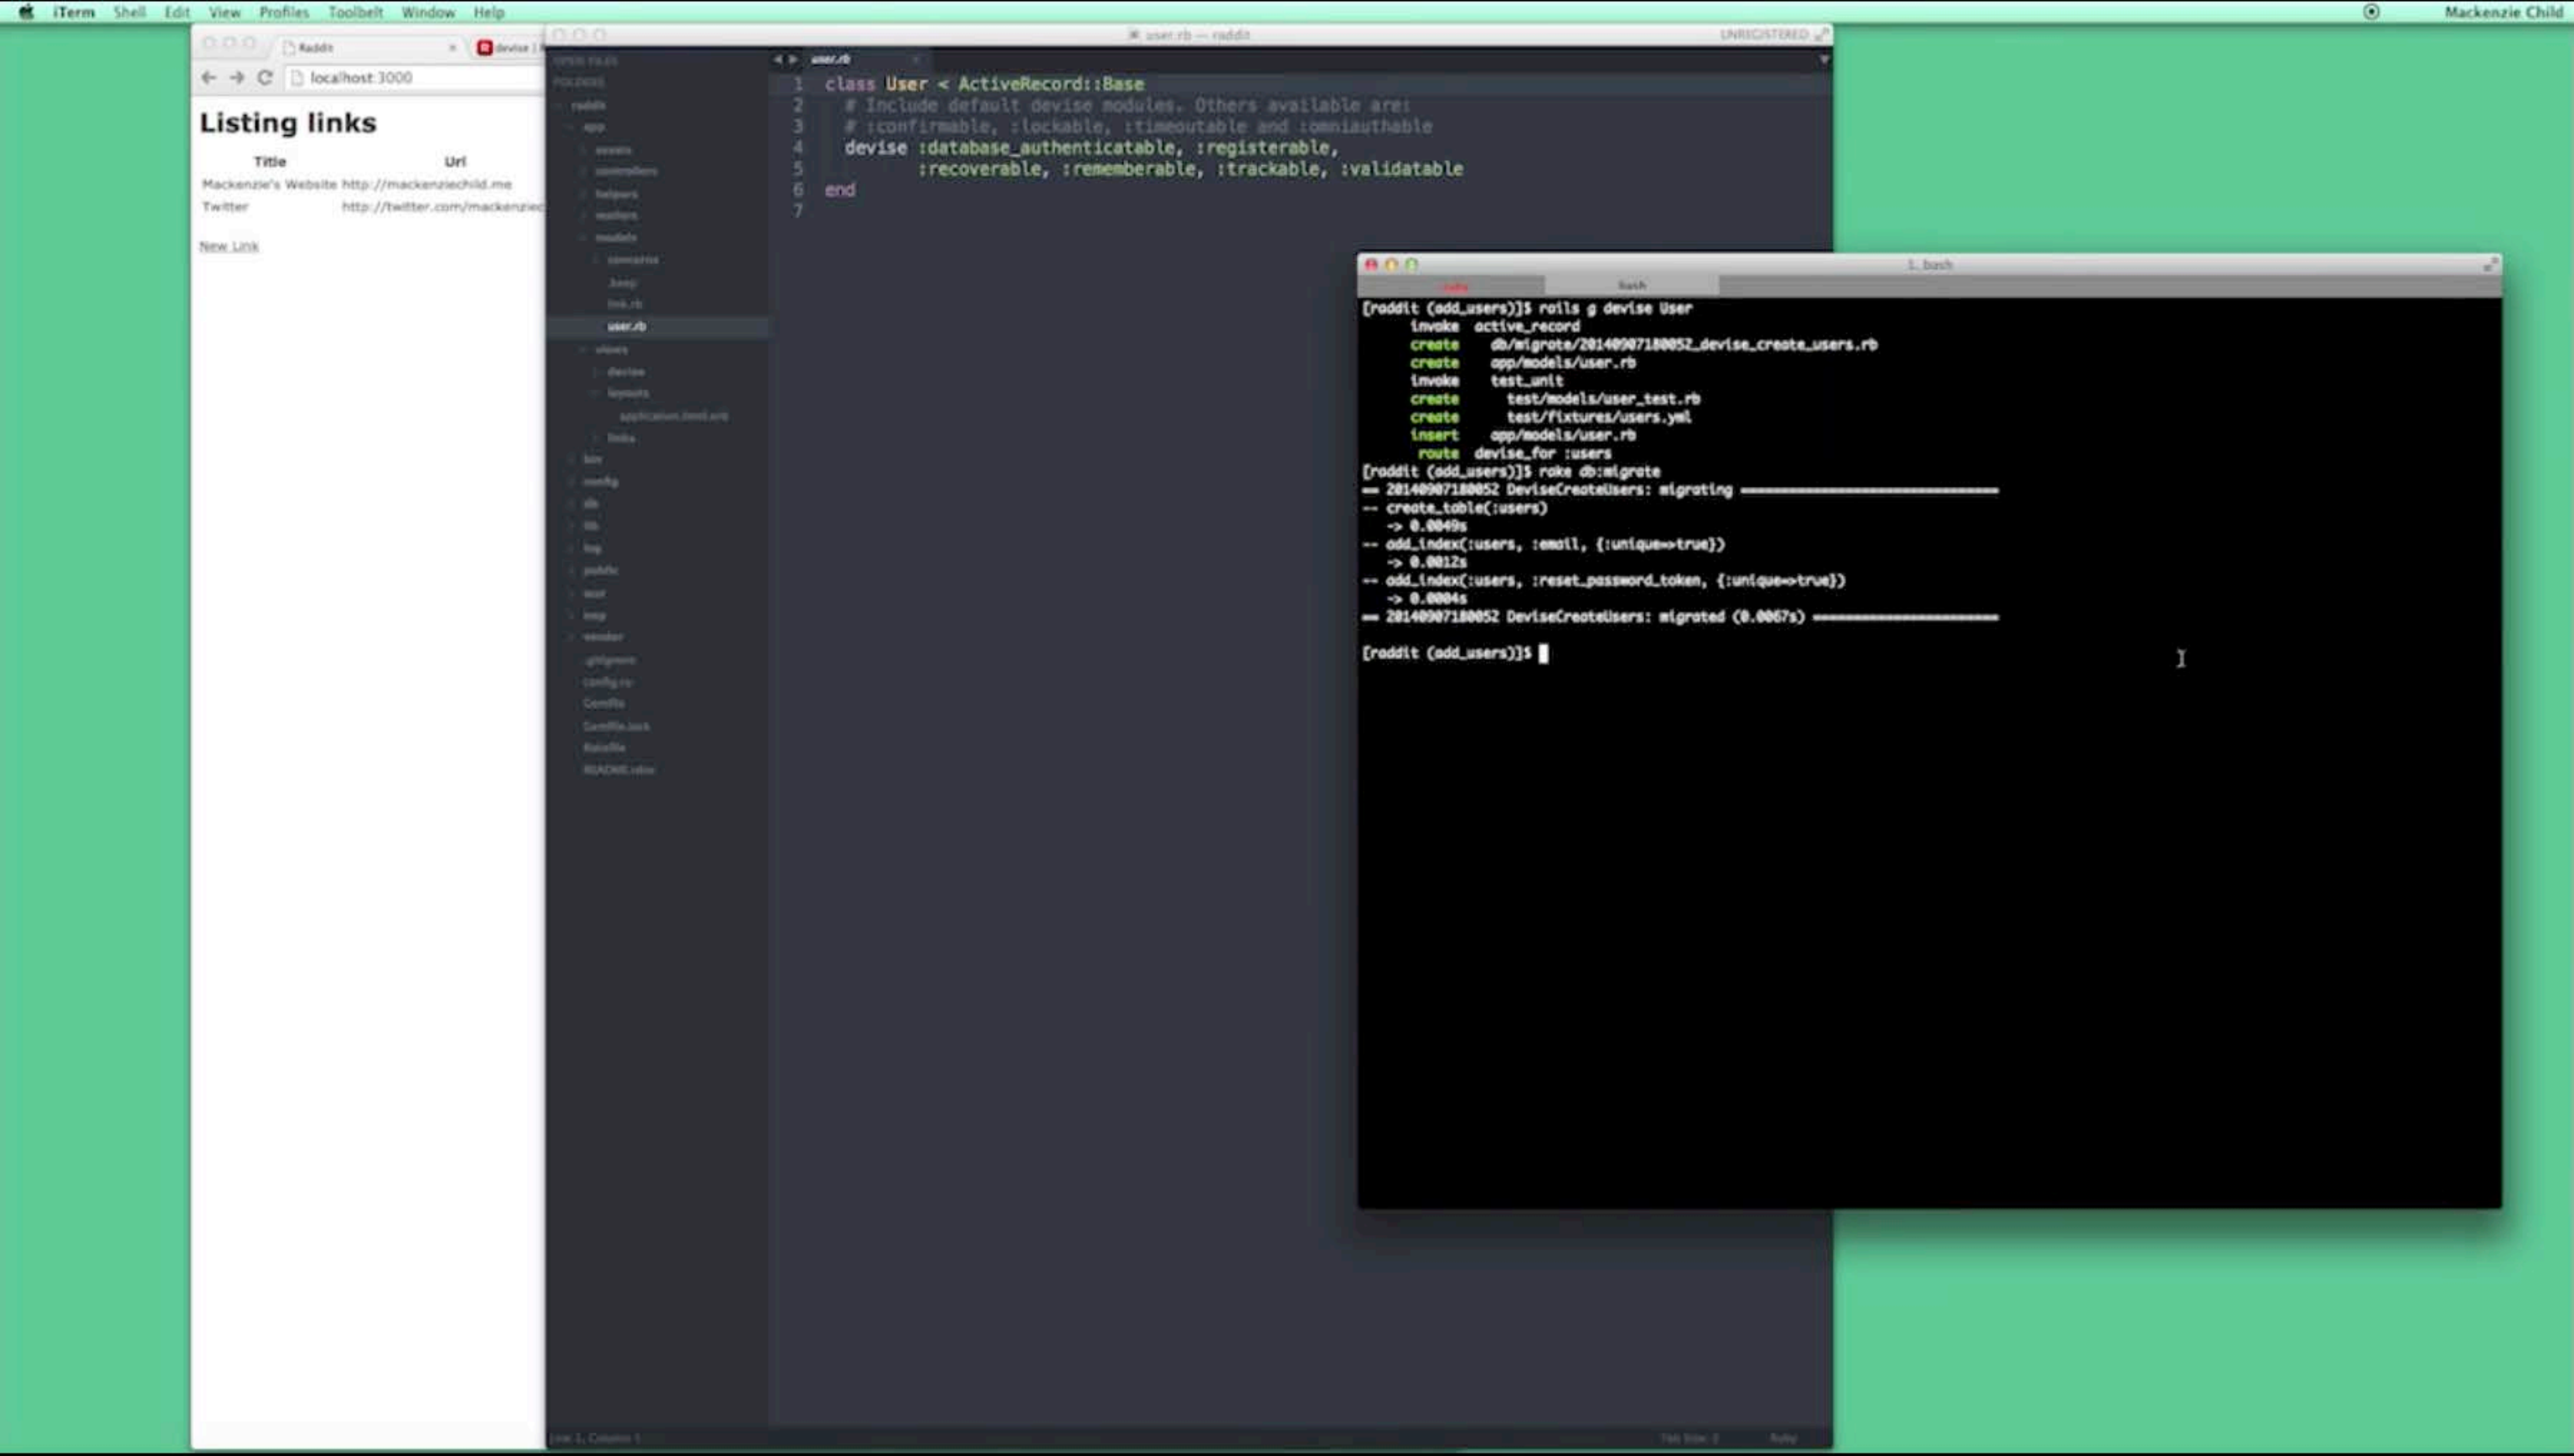

## Listing links

Title	Url
Mackenzie's Website	<a href="http://mackenziechild.me">http://mackenziechild.me</a>
Twitter	<a href="http://twitter.com/mackenziechild">http://twitter.com/mackenziechild</a>

New Link

```
1 class User < ActiveRecord::Base
2   # Include default devise modules. Others available are:
3   # :confirmable, :lockable, :timeoutable and :omniauthable
4   devise :database_authenticatable, :registerable,
5         :recoverable, :rememberable, :trackable, :validatable
6 end
7
```

```
[roddit (add_users)]$ rails g devise User
  invoke  active_record
  create  db/migrate/20140907180052_devise_create_users.rb
  create  app/models/user.rb
  invoke  test_unit
  create  test/models/user_test.rb
  create  test/fixtures/users.yml
  insert  app/models/user.rb
  route  devise_for :users
[roddit (add_users)]$ rake db:migrate
== 20140907180052 DeviseCreateUsers: migrating =====
-- create_table(:users)
   => 0.0049s
-- add_index(:users, :email, {:unique=>true})
   => 0.0012s
-- add_index(:users, :reset_password_token, {:unique=>true})
   => 0.0004s
== 20140907180052 DeviseCreateUsers: migrated (0.0067s) =====

[roddit (add_users)]$
```



localhost:3000/users/sign\_in

## Log in

Email

Password

☐ Remember me

[Sign up](#)

[Forgot your password?](#)

```
UNREGISTERED

/assets/links.js?body=1" for 127.0.0.1 at 2014-09-07 11:59:05 -0600

/assets/application.js?body=1" for 127.0.0.1 at 2014-09-07 11:59:05 -0600
[12:01:20] INFO going to shutdown ...
[12:01:20] INFO WEBrick::HTTPServer#start done.

users]]$ rails s
WEBrick
5 application starting in development on http://0.0.0.0:3000
a server -h` for more startup options
server is listening on all interfaces (0.0.0.0). Consider using 127.0.0.1 (--binding option)
Shutdown server
[12:01:22] INFO WEBrick 1.3.1
[12:01:22] INFO ruby 2.1.1 (2014-02-24) [x86_64-darwin13.0]
[12:01:22] INFO WEBrick::HTTPServer#start: pid=1145 port=3000

/users/sign_in" for 127.0.0.1 at 2014-09-07 12:01:31 -0600
rd::SchemaMigration Load (0.1ms) SELECT "schema_migrations".* FROM "schema_migrations"
y Devise::SessionsController#new as HTML
vise/shared/_links.erb (1.0ms)
vise/sessions/new.html.erb within layouts/application (18.2ms)
0 OK in 98ms (Views: 73.8ms | ActiveRecord: 0.4ms)

/assets/scaffolds.css?body=1" for 127.0.0.1 at 2014-09-07 12:01:31 -0600

/assets/jquery_ujs.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:31 -0600

/assets/application.css?body=1" for 127.0.0.1 at 2014-09-07 12:01:31 -0600

/assets/turbolinks.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:31 -0600

/assets/links.css?body=1" for 127.0.0.1 at 2014-09-07 12:01:31 -0600

/assets/jquery.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:31 -0600

/assets/links.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:31 -0600

/assets/application.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:31 -0600
```

localhost:3000/users/sign\_up

## Sign up

Email

Password (8 characters minimum)


Password confirmation

UNREGISTERED

1. ruby

```
"/assets/links.css?body=1" for 127.0.0.1 at 2014-09-07 12:01:48 -0600
"/assets/turbolinks.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:48 -0600
"/assets/jquery_ujs.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:48 -0600
"/assets/jquery.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:48 -0600
"/assets/links.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:48 -0600
"/assets/application.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:48 -0600
"/users/sign_up" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
  y Devise::RegistrationsController#new as HTML
  devise/shared/_links.erb (0.4ms)
  devise/registrations/new.html.erb within layouts/application (2.9ms)
  OK in 34ms (Views: 32.7ms | ActiveRecord: 0.0ms)
"/assets/application.css?body=1" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
"/assets/jquery.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
"/assets/turbolinks.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
"/assets/jquery_ujs.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
"/assets/scaffolds.css?body=1" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
"/assets/links.css?body=1" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
"/assets/application.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
"/assets/links.js?body=1" for 127.0.0.1 at 2014-09-07 12:01:55 -0600
```



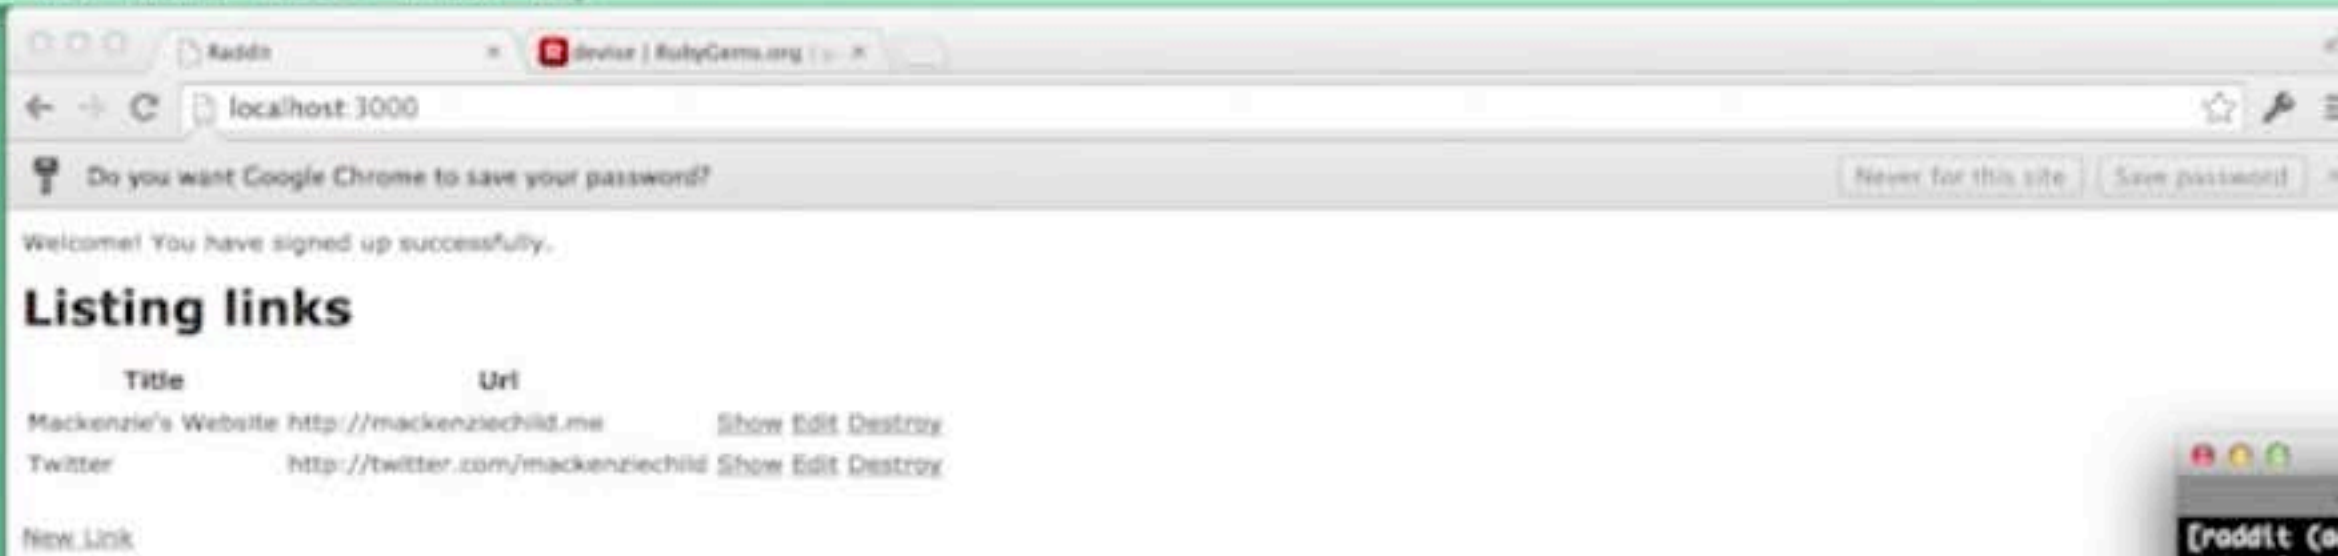

```
[roddit (add_users)]$ rails g devise User
  invoke  active_record
  create   db/migrate/20140907180052_devise_create_users.rb
  create   app/models/user.rb
  invoke   test_unit
  create   test/models/user_test.rb
  create   test/fixtures/users.yml
  insert   app/models/user.rb
  route    devise_for :users
[roddit (add_users)]$ rake db:migrate
== 20140907180052 DeviseCreateUsers: migrating =====
-- create_table(:users)
   => 0.0049s
-- add_index(:users, :email, {:unique=>true})
   => 0.0012s
-- add_index(:users, :reset_password_token, {:unique=>true})
   => 0.0004s
== 20140907180052 DeviseCreateUsers: migrated (0.0067s) =====

[roddit (add_users)]$
```



Welcome! You have signed up successfully.

## Listing links

Title	Url	
Mackenzie's Website	<a href="http://mackenziechild.me">http://mackenziechild.me</a>	Show Edit Destroy
Twitter	<a href="http://twitter.com/mackenziechild">http://twitter.com/mackenziechild</a>	Show Edit Destroy

New Link

```
[roddit (add_users)]$ rails g devise User
  invoke  active_record
  create   db/migrate/20140907180052_devise_create_users.rb
  create   app/models/user.rb
  invoke   test_unit
  create   test/models/user_test.rb
  create   test/fixtures/users.yml
  insert   app/models/user.rb
  route    devise_for :users
[roddit (add_users)]$ rake db:migrate
== 20140907180052 DeviseCreateUsers: migrating =====
-- create_table(:users)
   => 0.0049s
-- add_index(:users, :email, {:unique=>true})
   => 0.0012s
-- add_index(:users, :reset_password_token, {:unique=>true})
   => 0.0004s
== 20140907180052 DeviseCreateUsers: migrated (0.0067s) =====

[roddit (add_users)]$ rails
```

localhost:3000

Do you want Google Chrome to save your password?

Welcome! You have signed up successfully.

## Listing links


Title	Url	
Mackenzie's Website	<a href="http://mackenziechild.me">http://mackenziechild.me</a>	Show Edit Destroy
Twitter	<a href="http://twitter.com/mackenziechild">http://twitter.com/mackenziechild</a>	Show Edit Destroy

New Link

```
[raddit (add_users)]$ rails g devise User
  invoke  active_record
  create   db/migrate/20140907180052_devise_create_users.rb
  create   app/models/user.rb
  invoke   test_unit
  create   test/models/user_test.rb
  create   test/fixtures/users.yml
  insert   app/models/user.rb
  route    devise_for :users
[raddit (add_users)]$ rake db:migrate
== 20140907180052 DeviseCreateUsers: migrating =====
-- create_table(:users)
   => 0.0049s
-- add_index(:users, :email, {:unique=>true})
   => 0.0012s
-- add_index(:users, :reset_password_token, {:unique=>true})
   => 0.0004s
== 20140907180052 DeviseCreateUsers: migrated (0.0067s) =====

[raddit (add_users)]$ rails c
Loading development environment (Rails 4.1.5)
irb(main):001:0> User.count
(0.2ms) SELECT COUNT(*) FROM "users"
=> 1
irb(main):002:0> @user = User.first
User Load (0.1ms) SELECT "users".* FROM "users" ORDER BY "users"."id" ASC LIMIT 1
=> #<User id: 1, email: "hey@mackenziechild.me", encrypted_password: "$2a$10$H1W0AjdtkXXYgAxJQKc9Op6fGsp6ipL/Vo0IE7FFih...", reset_password_token: nil, reset_password_sent_at: nil, remember_created_at: nil, sign_in_count: 1, current_sign_in_at: "2014-09-07 18:02:03", last_sign_in_at: "2014-09-07 18:02:03", current_sign_in_ip: "127.0.0.1", last_sign_in_ip: "127.0.0.1", created_at: "2014-09-07 18:02:03", updated_at: "2014-09-07 18:02:03">
irb(main):003:0>
```



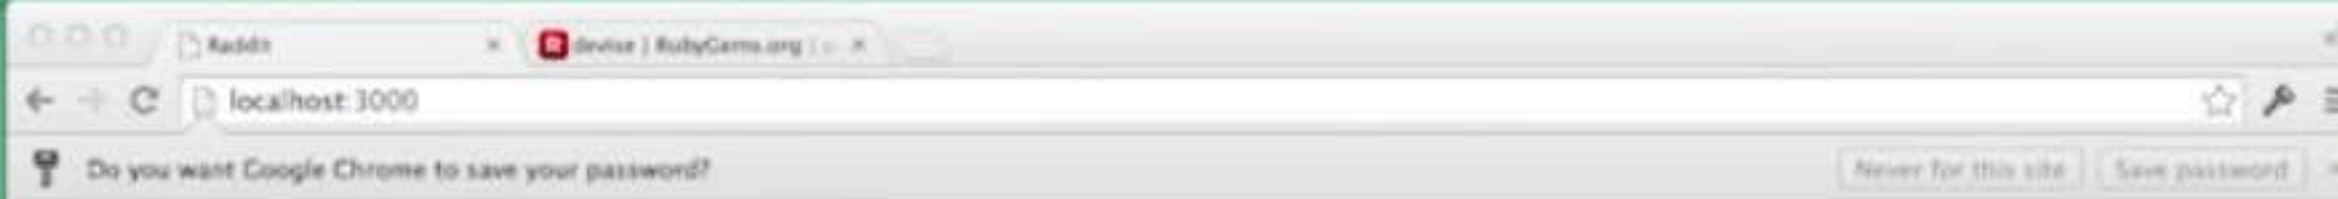

Welcome! You have signed up successfully.

## Listing links




Title	Url	
Mackenzie's Website	<a href="http://mackenziechild.me">http://mackenziechild.me</a>	<a href="#">Show</a> <a href="#">Edit</a> <a href="#">Destroy</a>
Twitter	<a href="http://twitter.com/mackenziechild">http://twitter.com/mackenziechild</a>	<a href="#">Show</a> <a href="#">Edit</a> <a href="#">Destroy</a>

New Link



```

[roddit (add_users)]$ rails g devise User
  invoke  active_record
  create   db/migrate/20140907180052_devise_create_users.rb
  create   app/models/user.rb
  invoke   test_unit
  create   test/models/user_test.rb
  create   test/fixtures/users.yml
  insert   app/models/user.rb
  route    devise_for :users
[roddit (add_users)]$ rake db:migrate
== 20140907180052 DeviseCreateUsers: migrating =====
-- create_table(:users)
   => 0.0049s
-- add_index(:users, :email, {:unique=>true})
   => 0.0012s
-- add_index(:users, :reset_password_token, {:unique=>true})
   => 0.0004s
== 20140907180052 DeviseCreateUsers: migrated (0.0067s) =====

[roddit (add_users)]$ rails c
Loading development environment (Rails 4.1.5)
irb(main):001:0> User.count
(0.2ms) SELECT COUNT(*) FROM "users"
=> 1
irb(main):002:0> @user = User.first
   User Load (0.1ms) SELECT "users".* FROM "users" ORDER BY "users"."id" ASC LIMIT 1
=> #<User id: 1, email: "hey@mackenziechild.me", encrypted_password: "$2a$10$H1W0AjdtkXXYgAxJQKc9Op6fGsp6ipL/Vo0IE7FFih...", reset_password_token: nil, reset_password_sent_at: nil, remember_created_at: nil, sign_in_count: 1, current_sign_in_at: "2014-09-07 18:02:03", last_sign_in_at: "2014-09-07 18:02:03", current_sign_in_ip: "127.0.0.1", last_sign_in_ip: "127.0.0.1", created_at: "2014-09-07 18:02:03", updated_at: "2014-09-07 18:02:03">
irb(main):003:0>
  
```

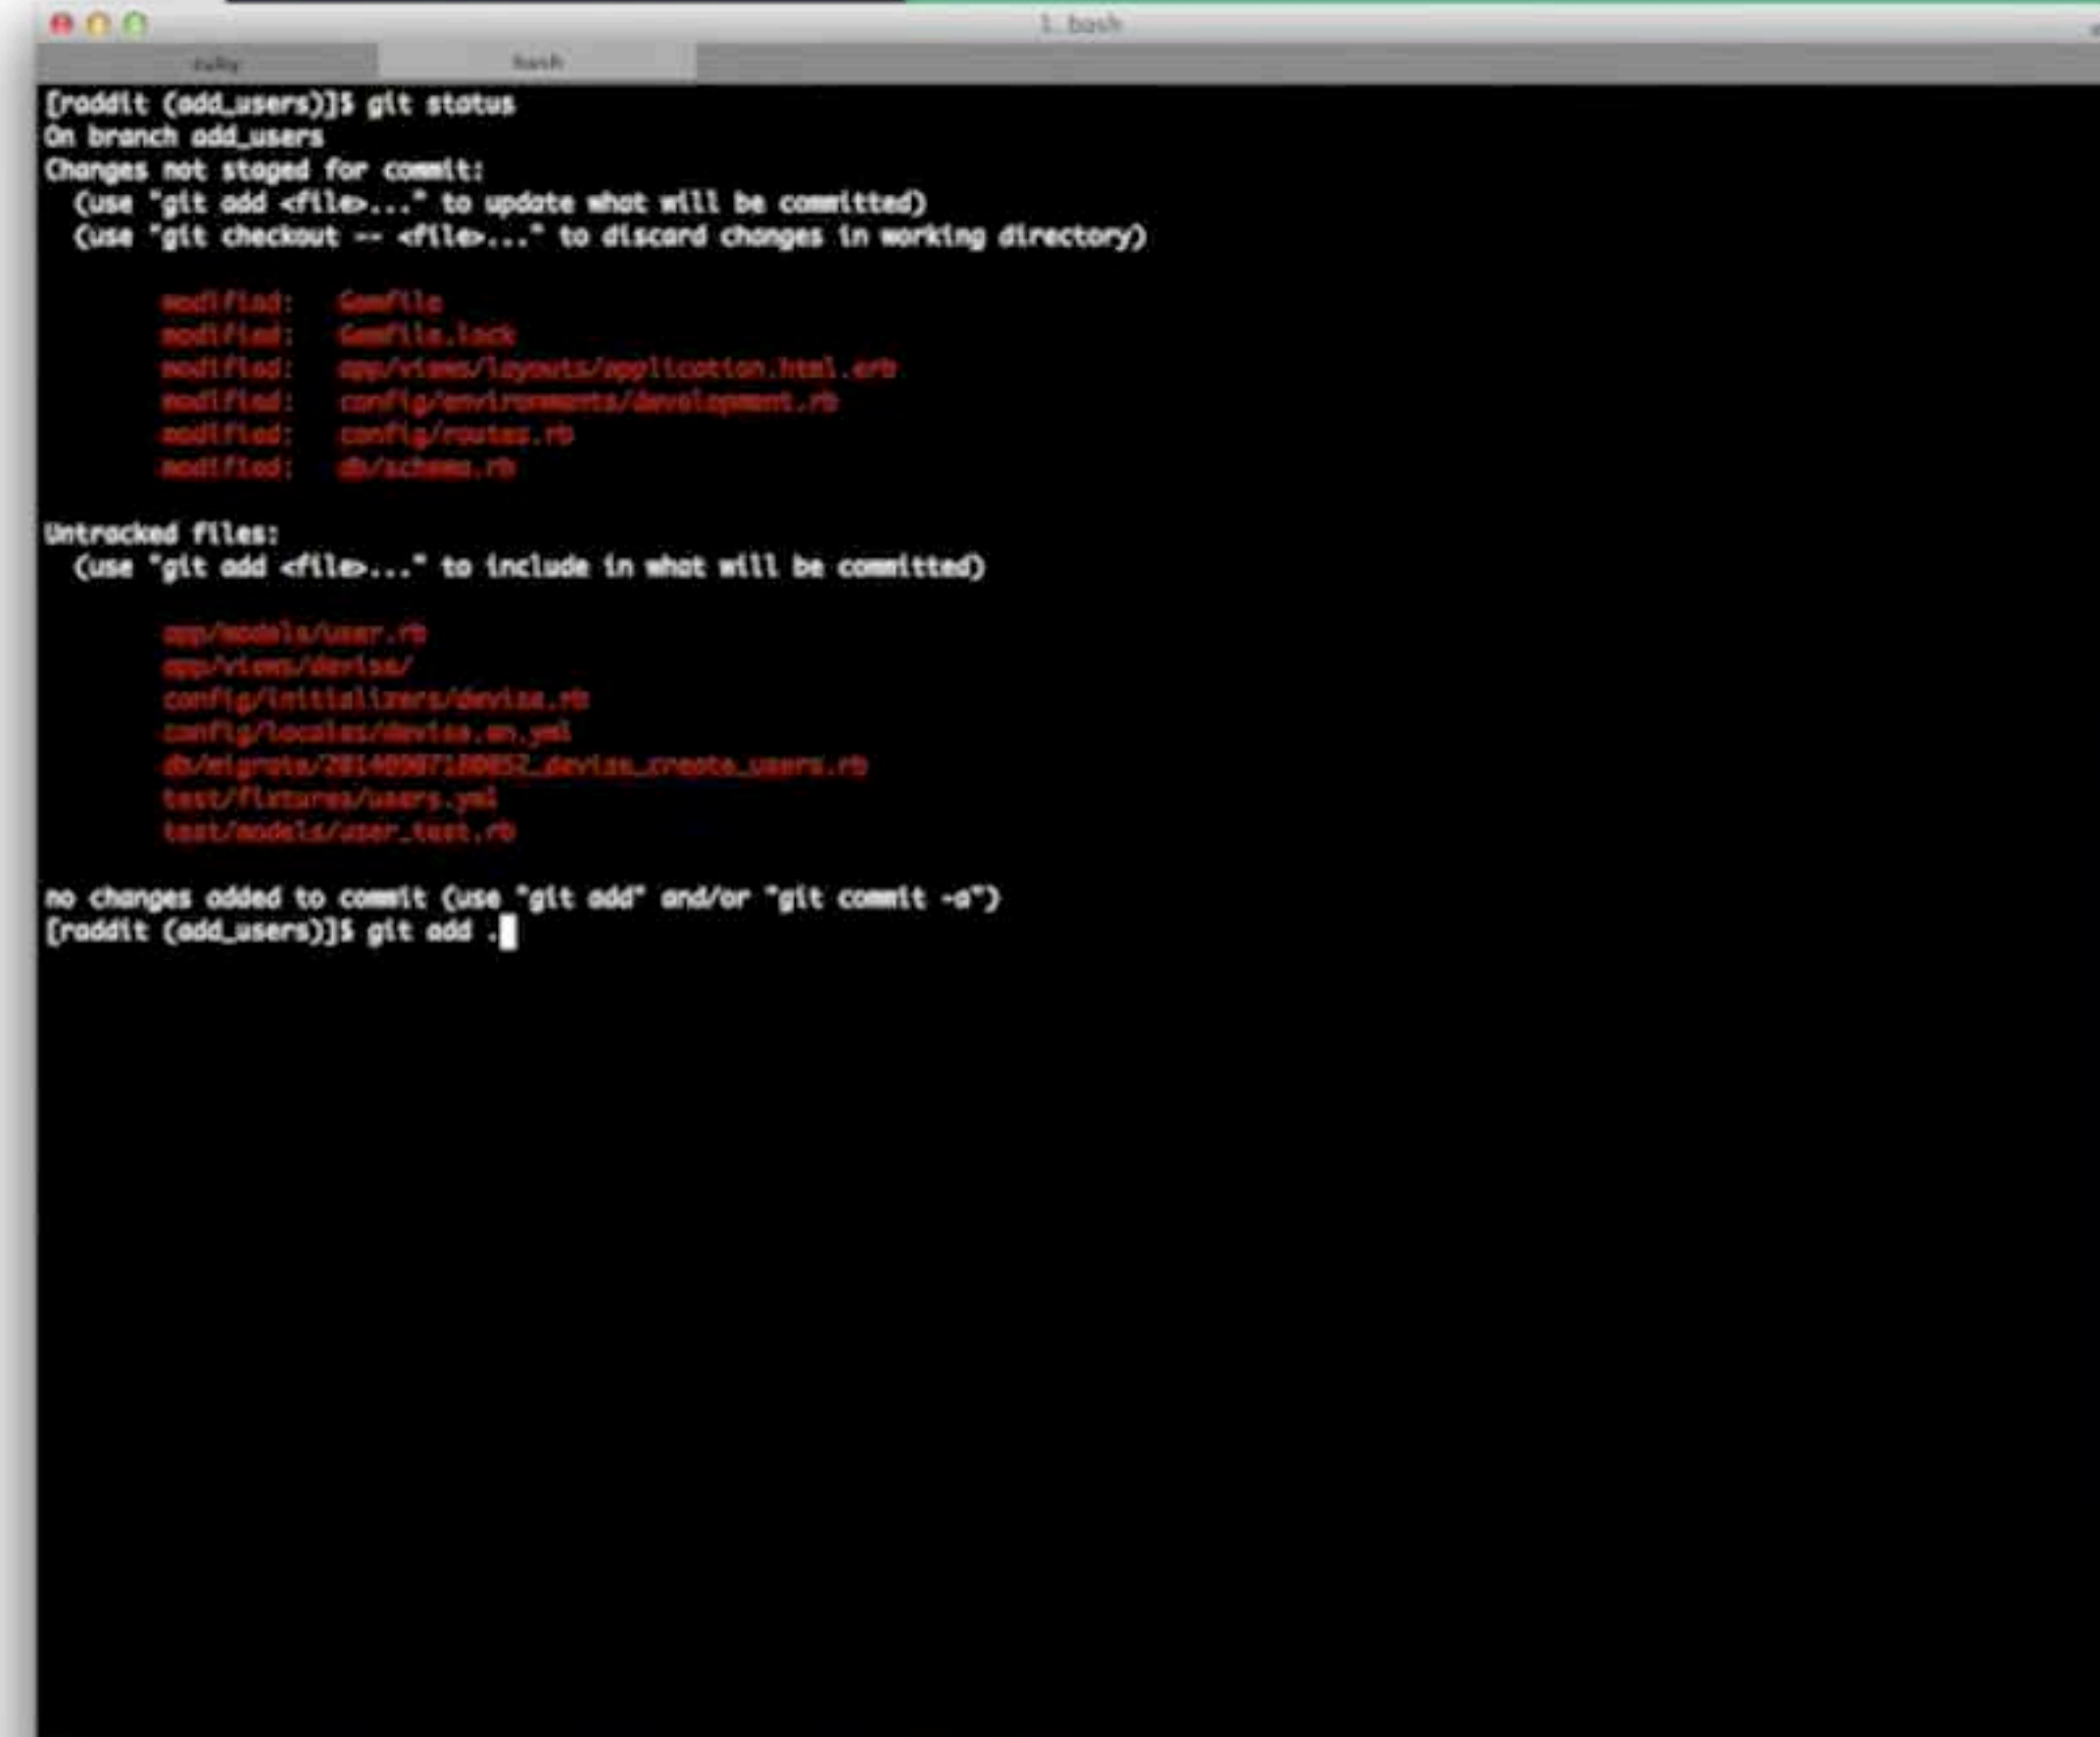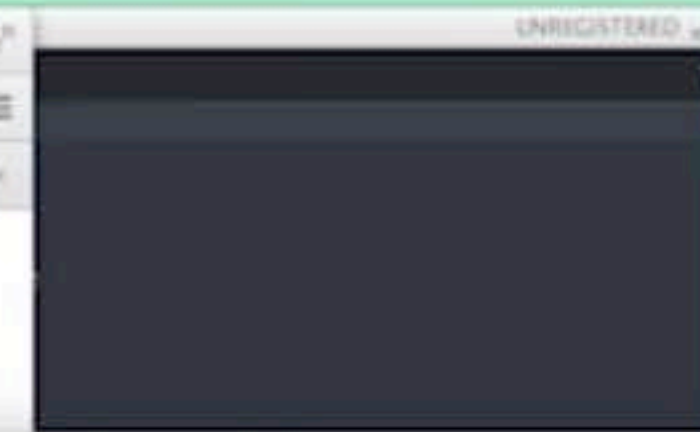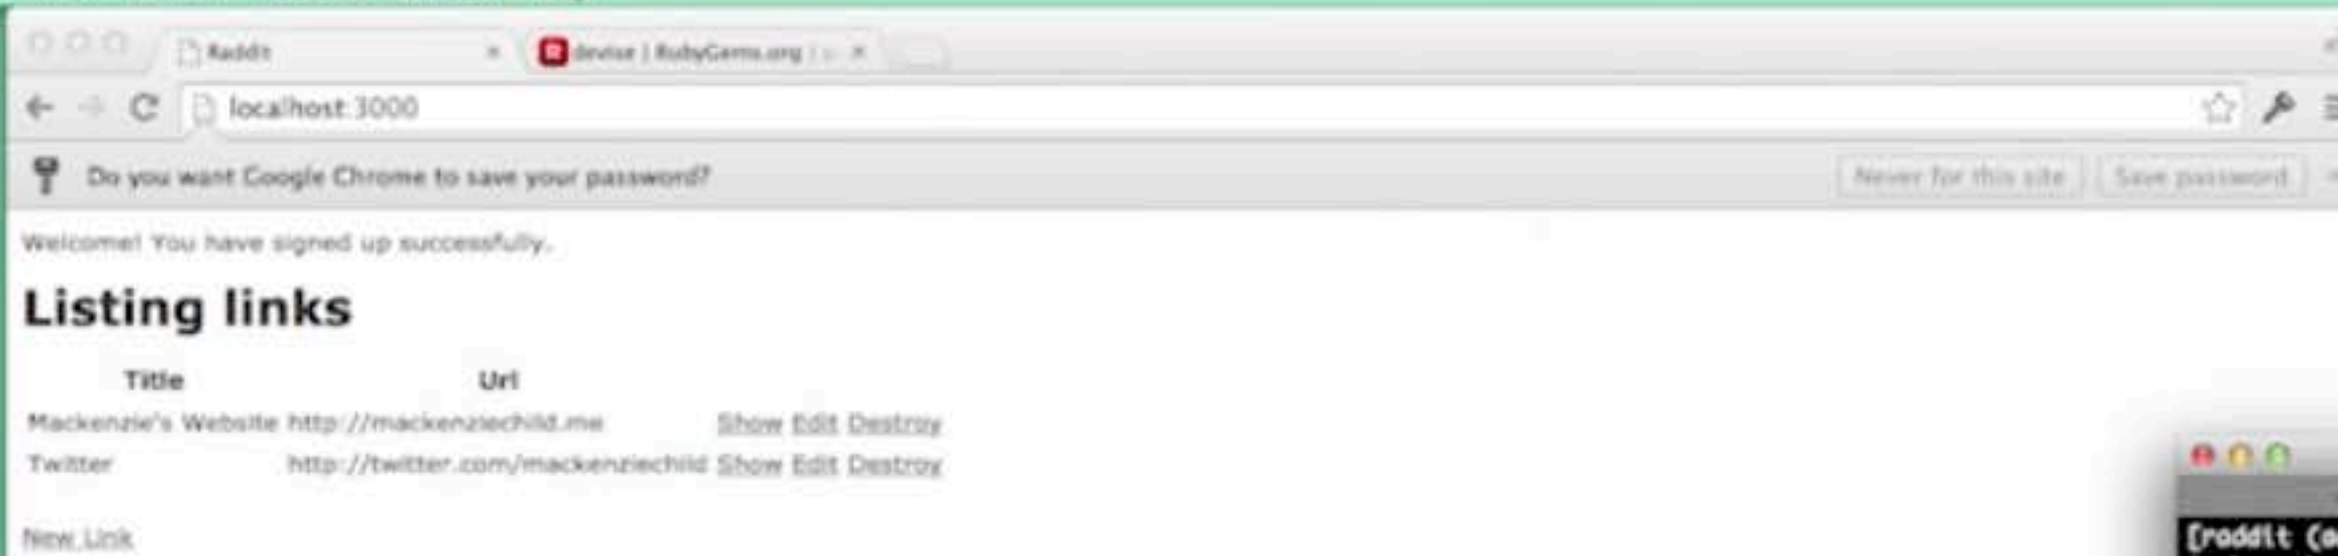



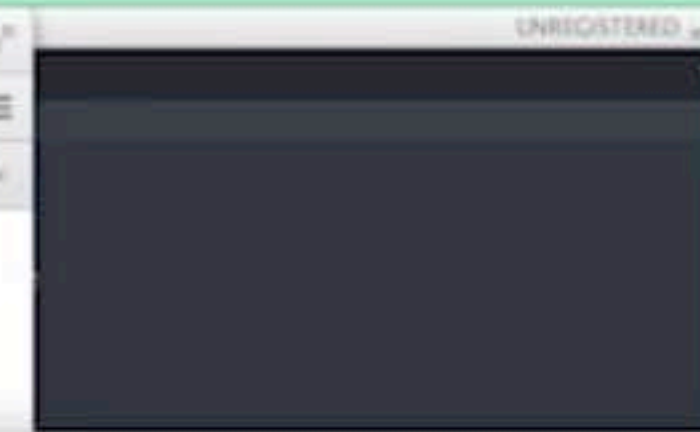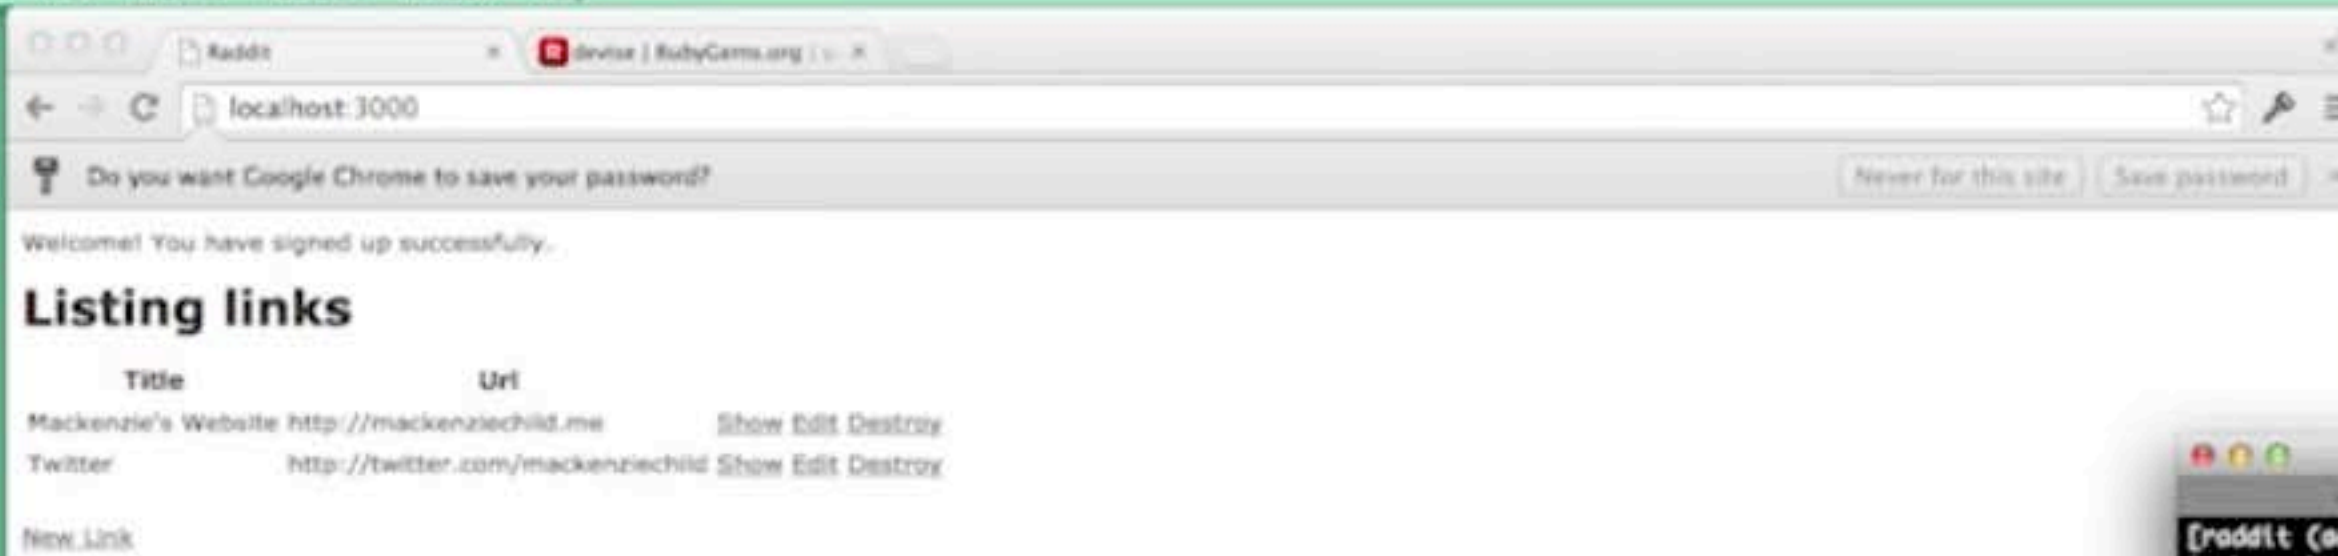

```

[roddit (add_users)]$ git status
On branch add_users
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   Gemfile
        modified:   Gemfile.lock
        modified:   app/views/layouts/application.html.erb
        modified:   config/environments/development.rb
        modified:   config/routes.rb
        modified:   db/schema.rb

Untracked files:
  (use "git add <file>..." to include in what will be committed)

        app/models/user.rb
        app/views/devise/
        config/initializers/devise.rb
        config/locales/devise.en.yml
        db/migrate/20140907180052_devise_create_users.rb
        test/fixtures/users.yml
        test/models/user_test.rb

no changes added to commit (use "git add" and/or "git commit -a")
[roddit (add_users)]$ git add .
[roddit (add_users)]$ git commit -am "Add devise and create User model"
[add_users 0e72c83] Add devise and create User model
23 files changed, 599 insertions(+), 41 deletions(-)
rewrite Gemfile (77%)
create mode 100644 app/models/user.rb
create mode 100644 app/views/devise/confirmations/new.html.erb
create mode 100644 app/views/devise/mailer/confirmation_instructions.html.erb
create mode 100644 app/views/devise/mailer/reset_password_instructions.html.erb
create mode 100644 app/views/devise/mailer/unlock_instructions.html.erb
create mode 100644 app/views/devise/passwords/edit.html.erb
create mode 100644 app/views/devise/passwords/new.html.erb
create mode 100644 app/views/devise/registrations/edit.html.erb
create mode 100644 app/views/devise/registrations/new.html.erb
create mode 100644 app/views/devise/sessions/new.html.erb
create mode 100644 app/views/devise/shared/_links.erb
create mode 100644 app/views/devise/unlocks/new.html.erb
create mode 100644 config/initializers/devise.rb
create mode 100644 config/locales/devise.en.yml
create mode 100644 db/migrate/20140907180052_devise_create_users.rb
create mode 100644 test/fixtures/users.yml
create mode 100644 test/models/user_test.rb
[roddit (add_users)]$
    
```