















HOME

DOCS

NEWS

COMMUNITY

B

HELP

VIEW ON GITHUB

## Welcome

Improve this page

This site aims to be a comprehensive guide to Jekyll. We'll cover topics such as getting your site up and running, creating and managing your content, customizing the way your site works and looks, deploying to various environments, and give you some advice on participating in the future development of Jekyll itself.

## So what is Jekyll, exactly?

Jekyll is a simple, blog-aware, static site generator. It takes a template directory containing raw text files in various formats, runs it through a converter (like Markdown) and our Liquid renderer, and spits out a complete, ready-to-publish static website suitable for serving with your

## **GETTING STARTED**

Welcome

Quick-start guide

Installation

Basic Usage

Directory structure

Configuration

## YOUR CONTENT

Front Matter

Writing posts

Working with drafts

Creating pages


Static Files

Variables

Collections



test.txt

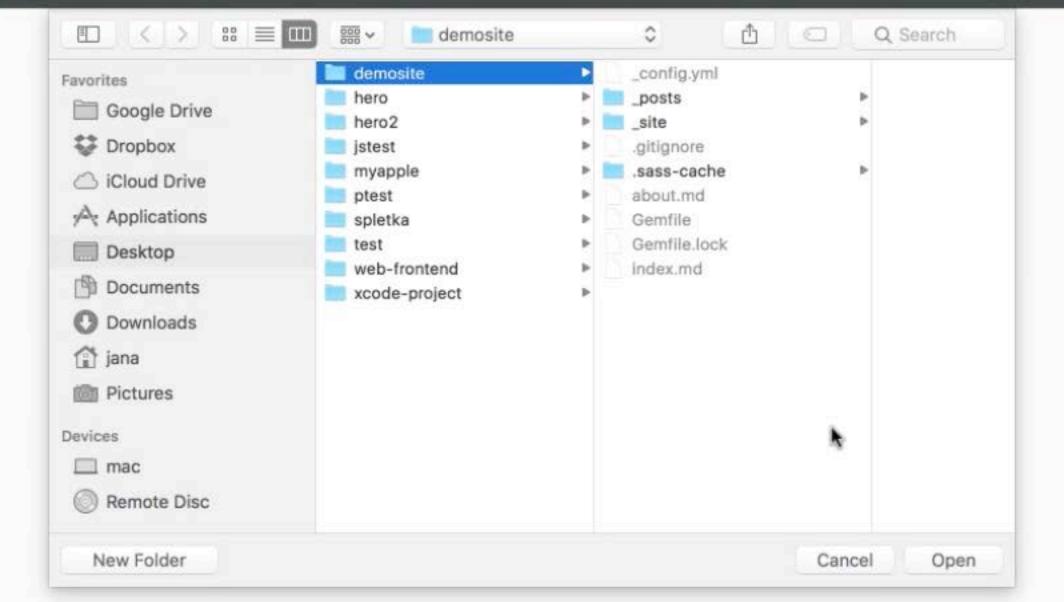


```
Working Files
                                 # Welcome to Jekyll!
                             2
 _config.yml
                                 # This config file is meant for settings that affect your whole blog, values
                                 # which you are expected to set up once and rarely edit after that. If you find
demosite +
                                 # yourself editing these this file very often, consider using Jekyll's data files
                                 # feature for the data you need to update frequently.
_config.yml
posts
                                 # For technical reasons, this file is *NOT* reloaded automatically when you use
                             8
                                 # 'bundle exec jekyll serve'. If you change this file, please restart the server process.
                             9
 .gitignore
                            10
                                 # Site settings
                            11
sass-cache
                                 # These are used to bersonalize your new site. If you look in the HTML files,
                            12
 about.md
                            13
                                 # you will see them accessed via {{ site.title }}, {{ site.email }}, and so on.
 Gemfile
                                 # You can create any custom variable you would like, and they will be accessible
                            14
 Gemfile.lock
                                 # in the templates via {{ site.myvariable }}.
                            15
 index.md
                                 title: Your awesome title
                            16
                            17
                                 email: your-email@domain.com
                                 description: > # this means to ignore newlines until "baseurl:"
                            18
                                   Write an awesome description for your new site here. You can edit this
                            19
                            20
                                   line in _config.yml. It will appear in your document head meta (for
                            21
                                   Google search results) and in your feed.xml site description.
                                 baseurl: "" # the subpath of your site, e.g. /blog
                            22
                                 url: "" # the base hostname & protocol for your site, e.g. http://example.com
                            23
                            24
                                 twitter_username: jekyllrb
                            25
                                 github_username: jekyll
                            26
                            27
                                 # Build settings
                                 markdown: kramdown
                            28
                                 theme: minima
                            29
                            30
                                 gems:
                                   - jekyll-feed
                            31
                            32
                                 exclude:
                                   - Gemfile
                            33
                                     Comfile look
```

Line 1, Column 1 — 35 Lines Tab Size: 4

```
# This config file is meant for settings that affect your whole blog, values
     # which you are expected to set up once and rarely edit after that. If you find
    # yourself editing these this file very often, consider using Jekyll's data files
     # feature for the data you need to update frequently.
 8
     # For technical reasons, this file is *NOT* reloaded automatically when you use
     # 'bundle exec jekyll serve'. If you change this file, please restart the server process.
 9
10
11
     # Site settings
    # These are used to personalize your new site. If you look in the HTML files,
12
13
     # you will see them accessed via {{ site.title }}, {{ site.email }}, and so on.
    # You can create any custom variable you would like, and they will be accessible
14
    # in the templates via {{ site.myvariable }}.
15
    title: Your awesome title
16
17
    email: your-email@domain.com
18
    description: > # this means to ignore newlines until "baseurl:"
19
      Write an awesome description for your new site here. You can edit this
20
      line in _config.yml. It will appear in your document head meta (for
      Google search results) and in your feed.xml site description.
21
    baseurl: "" # the subpath of your site, e.g. /blog
22
    url: "" # the base hostname & protocol for your site, e.g. http://example.com
23
     twitter_username: jekyllrb
24
25
    github_username: jekyll
26
    # Build settings
27
    markdown: kramdown
28
    *theme: minima
29
30
    gems:
       - jekyll-feed
31
32
    exclude:
33
       - Gemfile
34
      - Gemfile.lock
35
```

```
Working Files
                                      # This config file is meant for settings that affect your whole blog, values
                                      # which you are expected to set up once and rarely edit after that. If you find
 _config.yml
                                      # yourself editing these this file very often, consider using Jekyll's data files
                                      # feature for the data you need to update frequently.
demosite +
                                      # For technical reasons, this file is *NOT* reloaded automatically when you use
 _config.yml
                                      # 'bundle exec jekyll serve'. If you change this file, please restart the server process.
posts
                                10
                                11
                                                                 demosite — -bash — 80×24
                                12
                                                                                                               the HTML files,
 .gitignore
                                         Last login: Fri Oct 21 11:31:37 on console
                                13
                                         |mac:~ jana$ cd Desktop/demosite/
                                                                                                               il }}, and so on.
sass-cache
                                         mac:demosite jana$ bundle exec jekyll serve
                                                                                                               will be accessible
                                14
                                         Configuration file: /Users/jana/Desktop/demosite/_config.yml
 about.md
                                15
                                         Configuration file: /Users/jana/Desktop/demosite/_config.yml
 Gemfile
                                                   Source: /Users/jana/Desktop/demosite
                                16
                                               Destination: /Users/jana/Desktop/demosite/_site
 Gemfile.lock
                                17
                                          Incremental build: disabled. Enable with --incremental
 index.md
                                18
                                              Generating...
                                                          done in 0.408 seconds.
                                                                                                               edit this
                                19
                                          Auto-regeneration: enabled for '/Users/jana
                                20
                                         Configuration file: /Users/jana/Desktop/de
                                            Server address: http://127.0.0.1:4000/
                                                                                     CTRL + C
                                21
                                           Server running... press ctrl-c to stop.
                                22
                                      ba: ^Cmac:demosite jana$ |
                                                                                                                        aple.com
                                23
                                      UT
                                24
                                25
                                26
                                27
                                28
                                29
                                30
                                      gems:
                                        - jekyll-feed
                                31
                                32
                                      exclude:
                                33
                                        - Gemfile
                                34
                                        - Gemfile.lock
                                35
```

```
Working Files
                                      # This config file is meant for settings that affect your whole blog, values
                                      # which you are expected to set up once and rarely edit after that. If you find
 _config.yml
                                      # yourself editing these this file very often, consider using Jekyll's data files
                                       # feature for the data you need to update frequently.
demosite +
                                  8
                                       # For technical reasons, this file is *NOT* reloaded automatically when you use
 _config.yml
                                       # 'bundle exec jekyll serve'. If you change this file, please restart the server process.
                                  9
posts
                                10
                                11
                                                                  demosite — -bash — 80×24
                                12
                                                                                                                  the HTML files,
 .gitignore
                                          Last login: Fri Oct 21 11:31:37 on console
                                13
                                         mac:~ jana$ cd Desktop/demosite/
                                                                                                                 il }}, and so on.
sass-cache .s
                                          mac:demosite jana$ bundle exec jekyll serve
                                14
                                                                                                                 will be accessible
                                          Configuration file: /Users/jana/Desktop/demosite/_config.yml
 about.md
                                15
                                         Configuration file: /Users/jana/Desktop/demosite/_config.yml
 Gemfile
                                                    Source: /Users/jana/Desktop/demosite
                                16
                                                Destination: /Users/jana/Desktop/demosite/_site
 Gemfile.lock
                                17
                                           Incremental build: disabled. Enable with --incremental
 index.md
                                18
                                               Generating...
                                                           done in 0.408 seconds.
                                                                                                                  edit this
                                19
                                          Auto-regeneration: enabled for '/Users/jana/Desktop/demosite'
                                20
                                          Configuration file: /Users/jana/Desktop/demosite/_config.yml
                                                                                                                 ta (for
                                             Server address: http://127.0.0.1:4000/
                                21
                                            Server running... press ctrl-c to stop.
                                22
                                      ba: ^Cmac:demosite jana$ bundle show minima
                                          /Library/Ruby/Gems/2.0.0/gems/minima-2.0.0
                                23
                                                                                                                 p://example.com
                                          mac:demosite jana$
                                24
                                25
                                26
                                27
                                28
                                29
                                30
                                      gems:
                                         - jekyll-feed
                                31
                                 32
                                      exclude:
                                33
                                         - Gemfile
                                34
                                         - Gemfile.lock
                                35
```

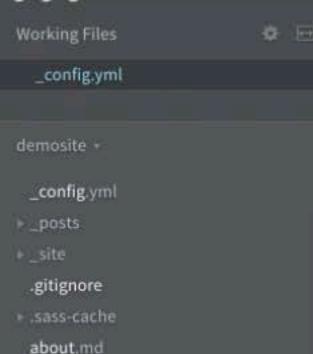


Gemfile


Gemfile.lock


index.md

# This config file is meant for settings that affect your whole blog, values # which you are expected to set up once and rarely edit after that. If you find # yourself editing these this file very often, consider using Jekyll's data files # feature for the data you need to update frequently. # For technical reasons, this file is \*NOT\* reloaded automatically when you use server process. demosite minima-2.0.0 U. Q Search

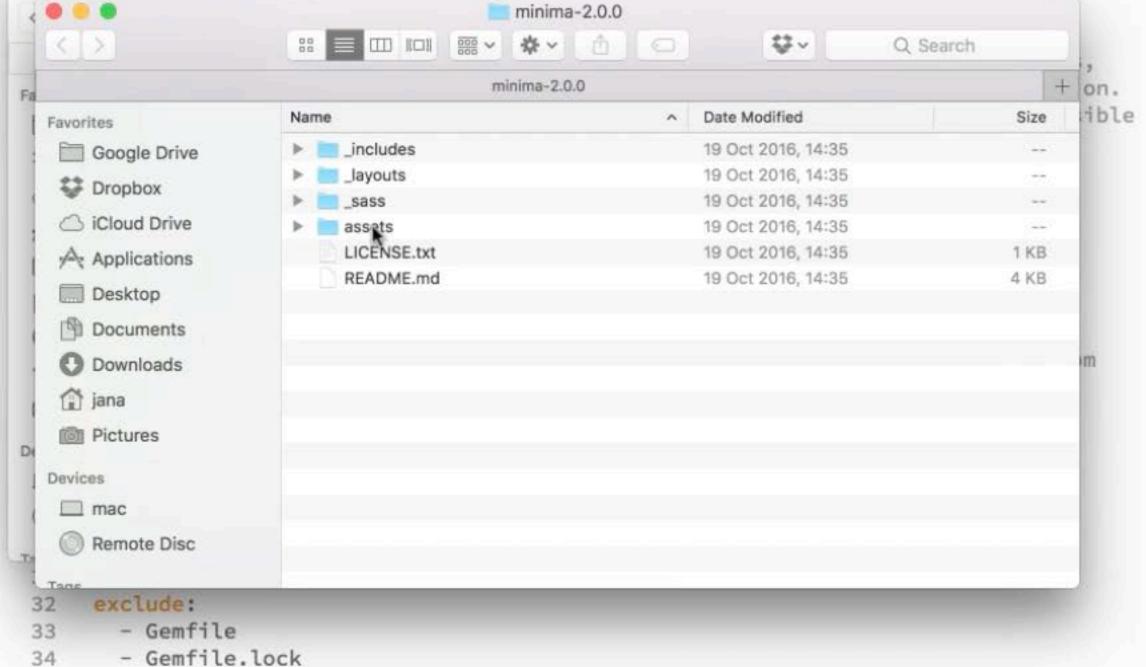


35

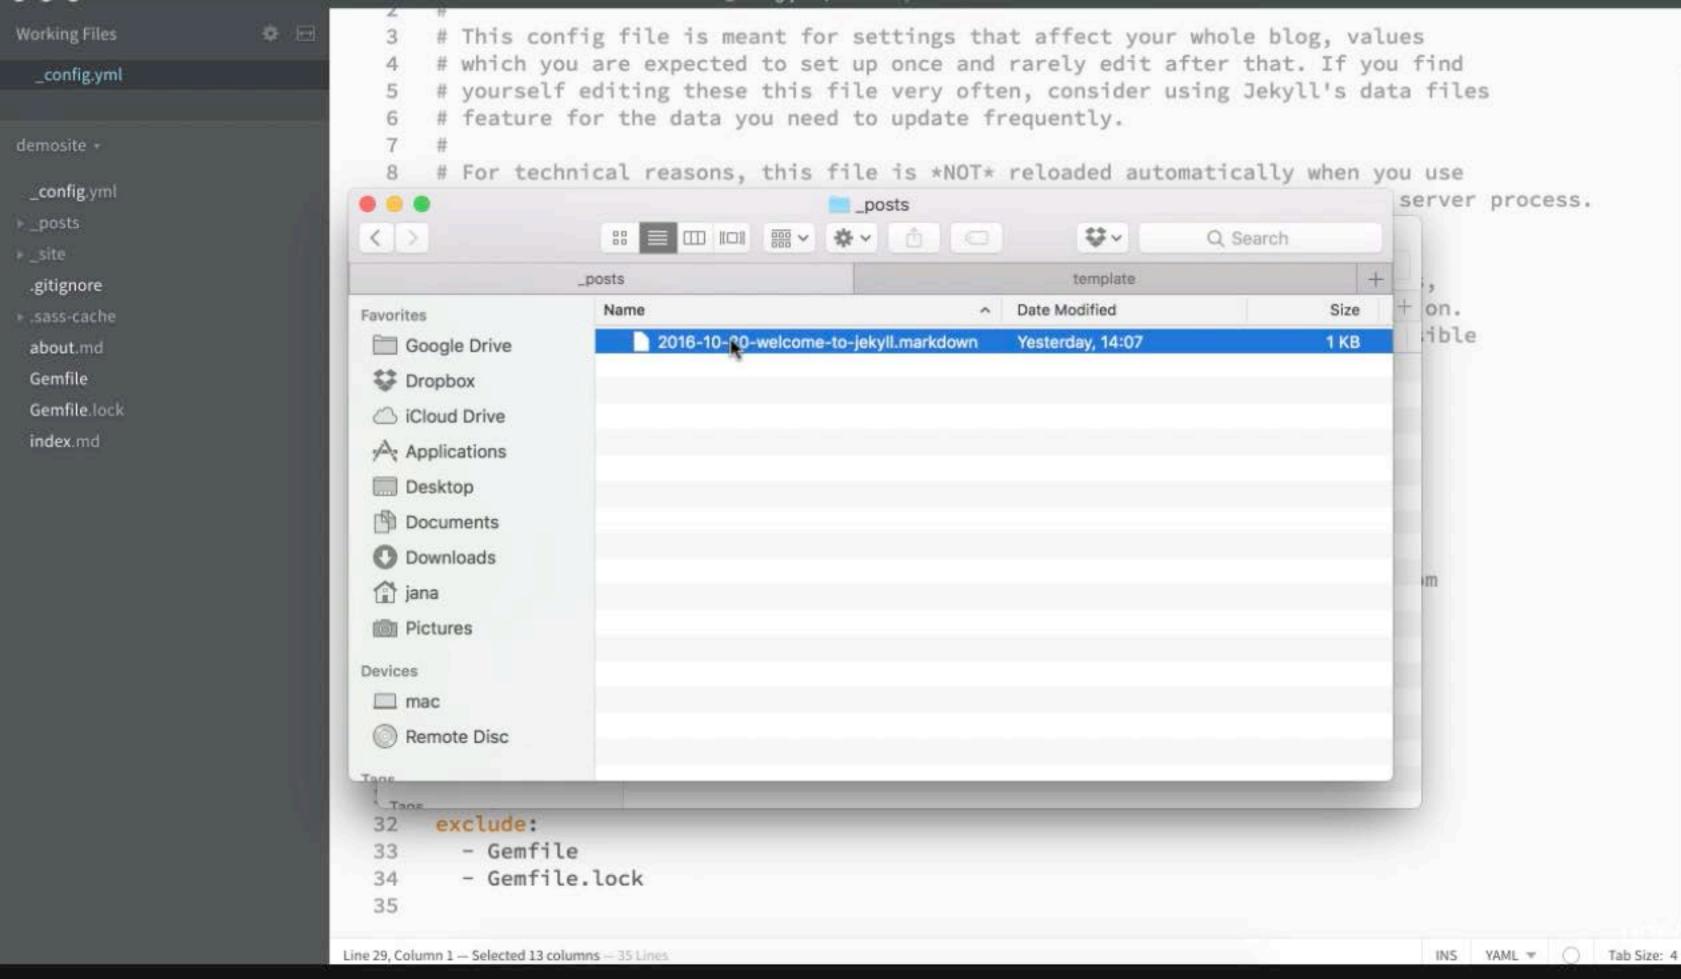

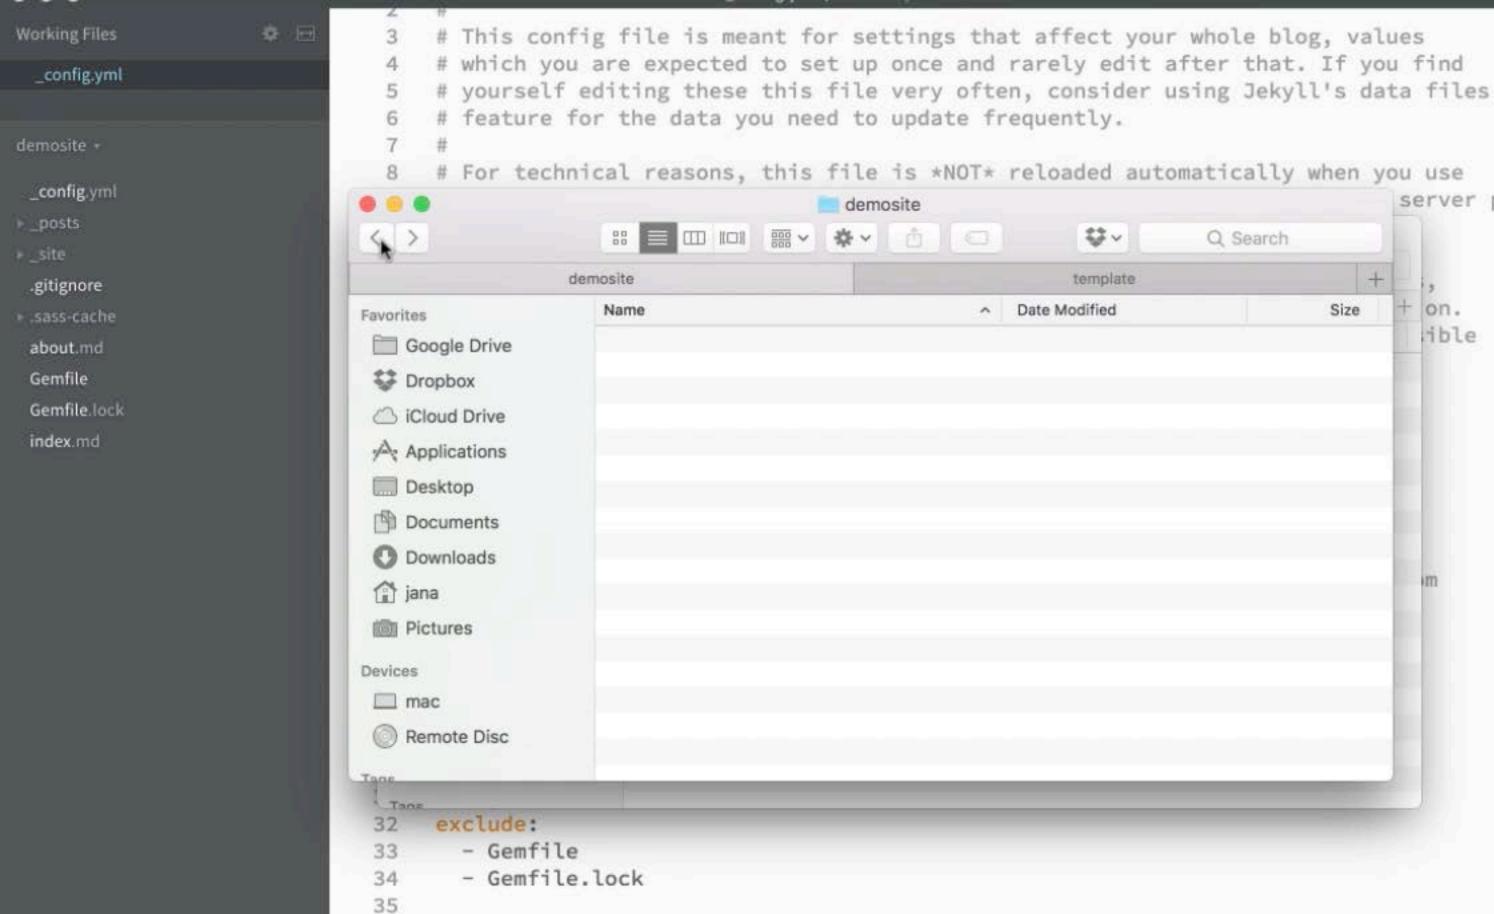

server process.


on.

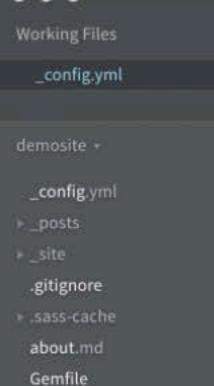

Gemfile.lock

index.md

- # This config file is meant for settings that affect your whole blog, values # which you are expected to set up once and rarely edit after that. If you find # yourself editing these this file very often, consider using Jekyll's data files # feature for the data you need to update frequently.
- # For technical reasons, this file is \*NOT\* reloaded automatically when you use server process. demosite ( ) \$\$ v Q Search demosite template Date Modified Size on. Name Favorites rible 1 KB \_config.yml Yesterday, 14:07 Google Drive \_posts Today, 13:20 S Dropbox ▶ \_\_site Today, 11:00 (A) iCloud Drive Yesterday, 14:07 35 bytes .gitignore Today, 11:00 .sass-cache Applications about.md Yesterday, 14:07 524 bytes .... Desktop Gemfile Yesterday, 14:07 811 bytes M Documents Gemfile.lock Yesterday, 14:08 1 KB ind x.md Yesterday, 14:07 213 bytes Downloads ijana **Pictures** Devices \_\_\_ mac Remote Disc
  - exclude:
  - 33 - Gemfile
  - 34 - Gemfile.lock
- 35

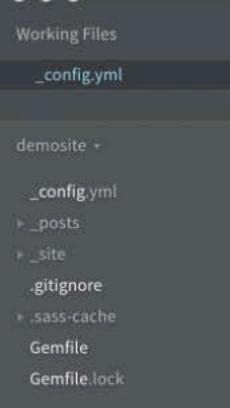

# This config file is meant for settings that affect your whole blog, values # which you are expected to set up once and rarely edit after that. If you find # yourself editing these this file very often, consider using Jekyll's data files # feature for the data you need to update frequently. # For technical reasons, this file is \*NOT\* reloaded automatically when you use server process. demosite ( ) \$3 v Q Search demosite template Date Modified Size on. Name Favorites rible 1 KB \_config.yml Yesterday, 14:07 Google Drive \_posts Today, 13:20 S Dropbox ▶ \_\_site Today, 11:00 (A) iCloud Drive Yesterday, 14:07 35 bytes .gitignore sass-cache Today, 11:00 Applications Gemfile Yesterday, 14:07 811 bytes \_\_\_ Desktop Gemfile.lock 1 KB Yesterday, 14:08 Documents Downloads ijana **Pictures** Devices \_\_\_ mac Remote Disc exclude: 33 - Gemfile 34 - Gemfile.lock

```
Welcome to Jekytt:
Working Files
                                 # This config file is meant for settings that affect your whole blog, values
config.yml
                                 # which you are expected to set up once and rarely edit after that. If you find
                                 # yourself editing these this file very often, consider using Jekyll's data files
                             5
                                 # feature for the data you need to update frequently.
demosite +
_config.yml
                                 # For technical reasons, this file is *NOT* reloaded automatically when you use
                             8
                                 # 'bundle exec jekyll serve'. If you change this file, please restart the server process.
posts
                             9
                            10
                            11
                                 # Site settings
 gitignore
                                 # These are used to personalize your new site. If you look in the HTML files,
                            12
.sass-cache
                                 # you will see them accessed via {{ site.title }}, {{ site.email }}, and so on.
                            13
 Gemfile
                                 # You can create any custom variable you would like, and they will be accessible
                            14
 Gemfile.lock
                            15
                                 # in the templates via {{ site.myvariable }}.
                                 title: Your awesome title
                            16
                            17
                                 email: your-email@domain.com
                            18
                                 description: > # this means to ignore newlines until "baseurl:"
                            19
                                  Write an awesome description for your new site here. You can edit this
                                   line in _config.yml. It will appear in your document head meta (for
                            20
                                   Google search results) and in your feed.xml site description.
                            21
                            22
                                 baseurl: "" # the subpath of your site, e.g. /blog
                                 url: "" # the base hostname & protocol for your site, e.g. http://example.com
                            23
                            24
                                 twitter_username: jekyllrb
                                 github_username: jekyll
                            25
                            26
                            27
                                 # Build settings
                                 markdown: kramdown
                            28
                            29
                                 gems:
                                   - jekyll-feed
                            30
                            31
                                 exclude:
                            32
                                   - Gemfile
                                   - Gemfile.lock
                            33
                            34
```

Line 28, Column 19 — 34 Lines Tab Size: 4

```
Working Files
```

\_config.yml Gemfile

demosite +

\_config.yml

+ posts

site

gitignore

.sass-cache

Gemfile

Gemfile.lock

```
source "https://rubygems.org"
     ruby RUBY_VERSION
    # Hello! This is where you manage which Jekyll version is used to run.
    # When you want to use a different version, change it below, save the
     # file and run `bundle install`. Run Jekyll with `bundle exec`, like so:
           bundle exec jekyll serve
 8
 9
10
    # This will help ensure the proper Jekyll version is running.
     # Happy Jekylling!
11
12
    gem "jekyll", "3.3.0"
13
    # This is the default theme for new Jekyll sites. You may change this to anything you like.
14
15
16
    # If you want to use GitHub Pages, remove the "gem "jekyll"" above and
17
    # uncomment the line below. To upgrade, run `bundle update github-pages`.
18
    # gem "github-pages", group: :jekyll_plugins
19
20
21
    # If you have any plugins, put them here!
    group :jekyll_plugins do
22
        gem "jekyll-feed", "~> 0.6"
23
24
    end
25
```

Line 15, Column 1 - 25 Lines

```
Working Files
```



Gemfile

demosite .

\_config.yml

+ posts

site

gitignore

.sass-cache

Gemfile

Gemfile.lock

```
source "https://rubygems.org"
     ruby RUBY_VERSION
    # Hello! This is where you manage which Jekyll version is used to run.
    # When you want to use a different version, change it below, save the
     # file and run 'bundle install'. Run Jekyll with 'bundle exec', like so:
           bundle exec jekyll serve
 8
 9
10
    # This will help ensure the proper Jekyll version is running.
     # Happy Jekylling!
11
12
    gem "jekyll", "3.3.0"
13
    # This is the default theme for new Jekyll sites. You may change this to anything you like.
14
15
    # If you want to use GitHub Pages, remove the "gem "jekyll"" above and
16
    # uncomment the line below. To upgrade, run 'bundle update github-pages'.
17
    # gem "github-pages", group: :jekyll_plugins
18
19
    # If you have any plugins, put them here!
20
21
    group :jekyll_plugins do
22
        gem "jekyll-feed", "~> 0.6"
23
    end
24
```

```
Working Files 

_config.yml

Gemfile
```

demosite

\_config.yml

posts

▶ site

gitignore

.sass-cache

Gemfile

Gemfile.lock

```
source "https://rubygems.org"
      ruby RUBY_VERSION
      # Hello! This is where you manage which Jekyll version is used to run.
      # When you want to use a different version, change it below, save the
      # file and run 'bundle install'. Run Jekyll with 'bundle exec', like so:
             bundle exec jekyll serve
                                   demosite - bundle - 80×24
 9
10
         Last login: Fri Oct 21 11:31:37 on console
         [mac:~ jana$ cd Desktop/demosite/
11
         mac:demosite jana$ bundle exec jekyll serve
12
      gel Configuration file: /Users/jana/Desktop/demosite/_config.yml
         Configuration file: /Users/jana/Desktop/demosite/_config.yml
13
                    Source: /Users/jana/Desktop/demosite
                                                                                  ige this to anything you like.
14
               Destination: /Users/jana/Desktop/demosite/_site
          Incremental build: disabled. Enable with --incremental
15
               Generating...
16
                                                                                  bove and
                           done in 0.408 seconds.
17
                                                                                  hub-pages'.
          Auto-regeneration: enabled for '/Users/jana/Desktop/demosite'
         Configuration file: /Users/jana/Desktop/demosite/_config.yml
18
             Server address: http://127.0.0.1:4000/
19
           Server running... press ctrl-c to stop.
         ^Cmac:demosite jana$ bundle show minima
20
         /Library/Ruby/Gems/2.0.0/gems/minima-2.0.0
21
     grimac:demosite jana$ bundle
22
23
      en
24
```

```
Working Files 

_config.yml

Gemfile
```

demosite

\_config.yml

+ posts

\*\_site


gitignore

+ .sass-cache

Gemfile

Gemfile.lock

```
source "https://rubygems.org"
      ruby RUBY_VERSION
      # Hello! This is where you manage which Jekyll version is used to run.
      # When you want to use a different version, change it below, save the
      # file and run 'bundle install'. Run Jekyll with 'bundle exec', like so:
             bundle exec jekyll serve
 8
                                  demosite --- bash -- 80×24
 9
10
         Rubygems 2.0.14.1 is not threadsafe, so your gems will be installed one at a tim
         e. Upgrade to Rubygems 2.1.0 or higher to enable parallel gem installation.
11
         Using addressable 2.4.0
12
      gel Using colorator 1.1.0
         Using ffi 1.9.14
13
         Using forwardable-extended 2.6.0
                                                                                  ige this to anything you like.
14
         Using sass 3.4.22
15
         Using rb-fsevent 0.9.7
         Using kramdown 1.12.0
16
                                                                                  bove and
         Using liquid 3.0.6
17
         Using mercenary 0.3.6
                                                                                  hub-pages'.
         Using rouge 1.11.1
18
         Using safe_yaml 1.0.4
19
         Using bundler 1.13.5
         Using rb-inotify 0.9.7
20
         Using pathutil 0.14.0
21
     gr Using jekyll-sass-converter 1.4.0
22
         Using listen 3.0.8
         Using jekyll-watch 1.5.0
23
     en Using jekyll 3.3.0
24
         Using jekyll-feed 0.8.0
         Bundle complete! 2 Gemfile dependencies, 19 gems now installed.
         Use 'bundle show [gemname]' to see where a bundled gem is installed.
         mac:demosite jana$
```



+ posts


gitignore


.sass-cache

Gemfile

Gemfile.lock

» untitled folder

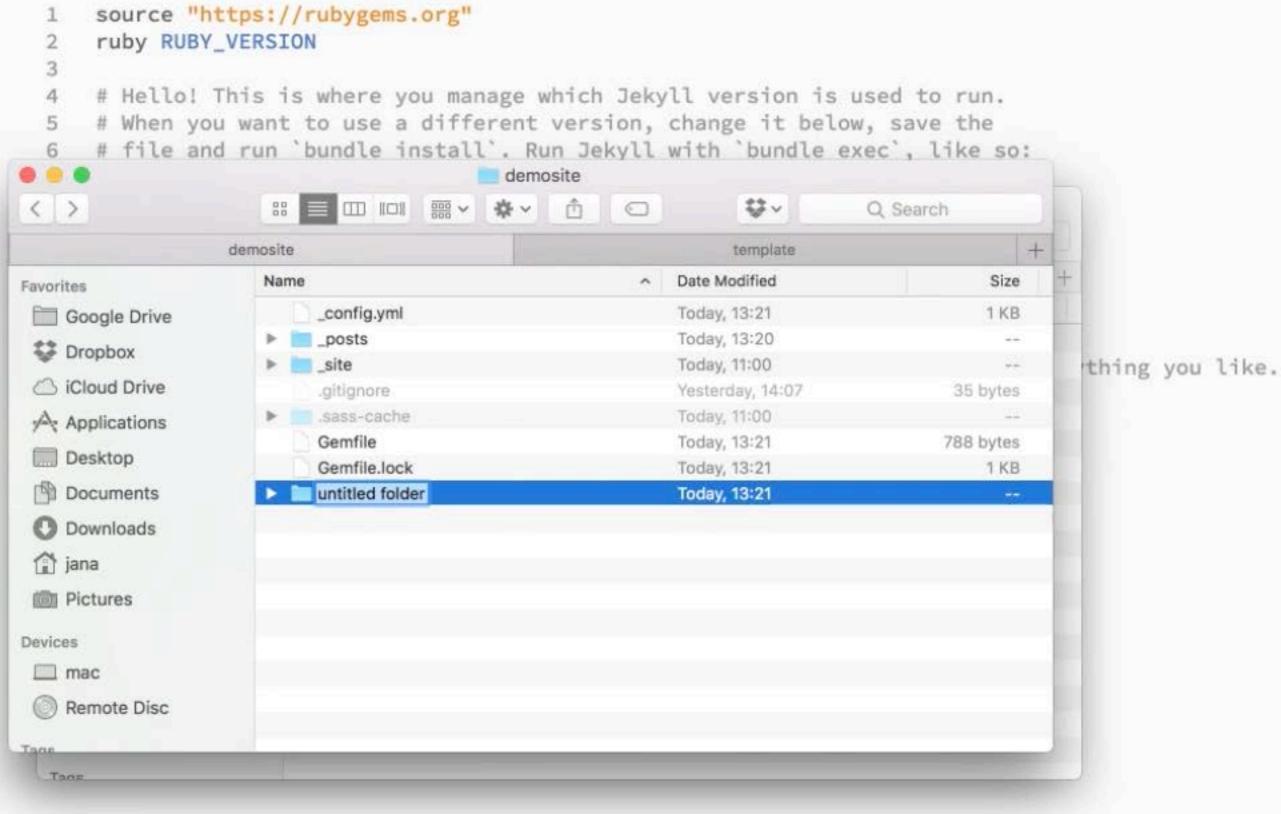

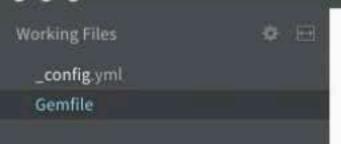

+ posts


gitignore


.sass-cache

Gemfile

Gemfile.lock

» untitled folder

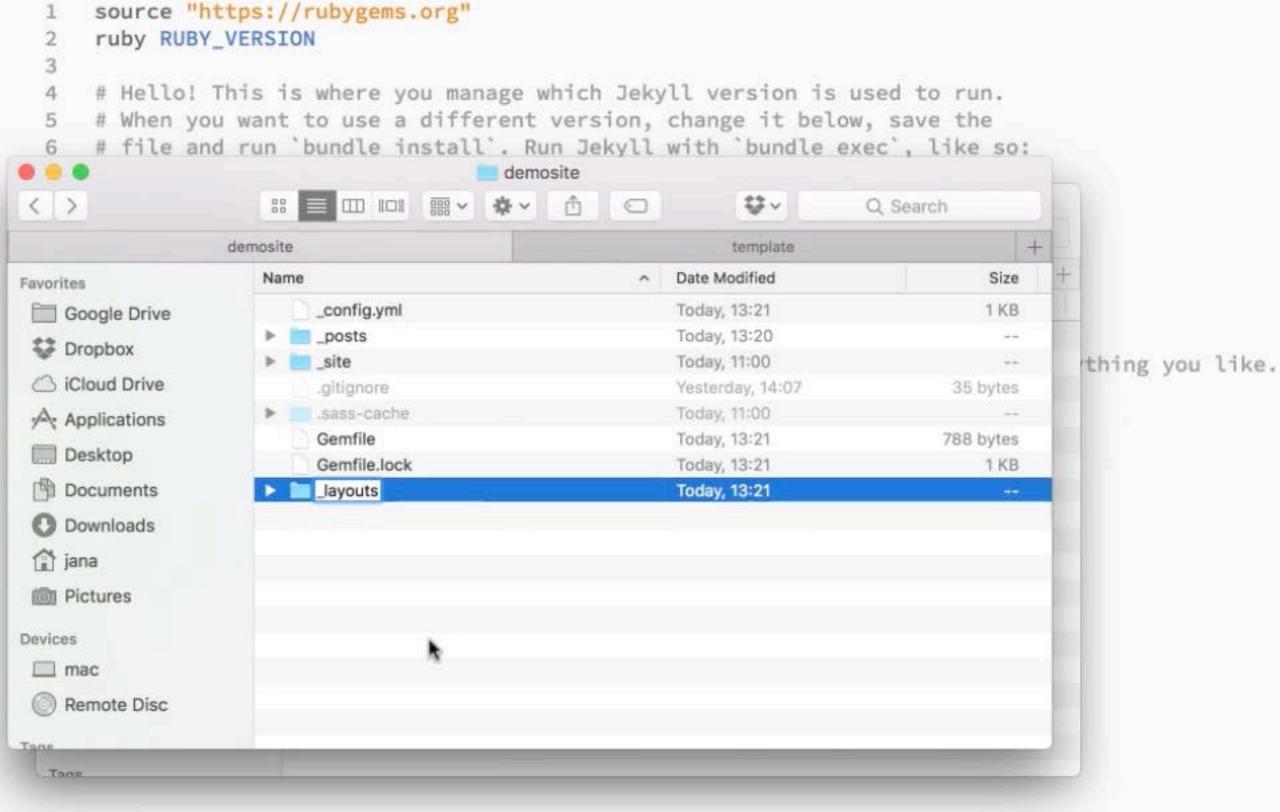

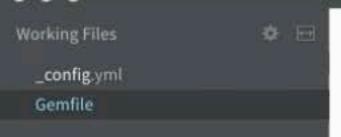

+ layouts

+ posts


.gitignore


.sass-cache

Gemfile

Gemfile lock

» untitled folder

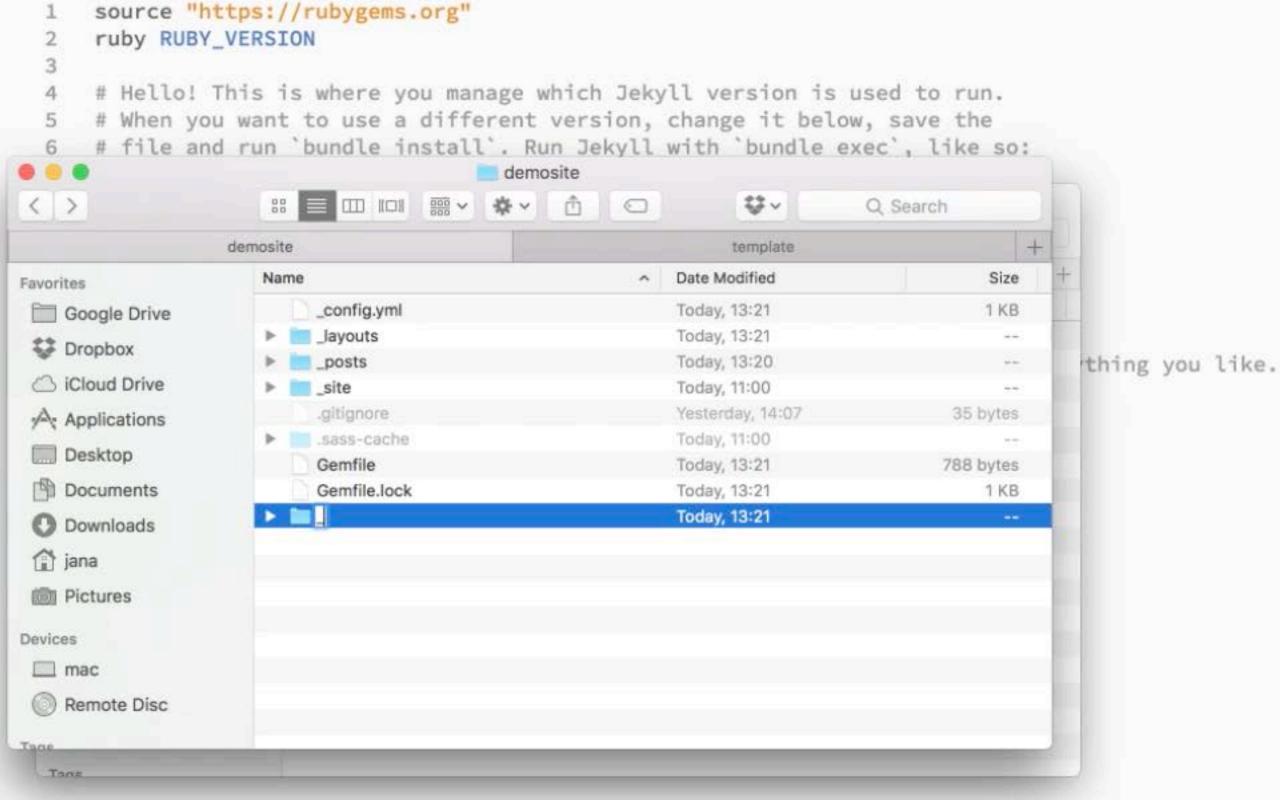

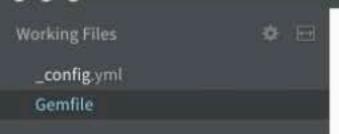

+\_includes

| \_layouts


▶ posts


gitignore

▶ .sass-cache

Gemfile

Gemfile.lock

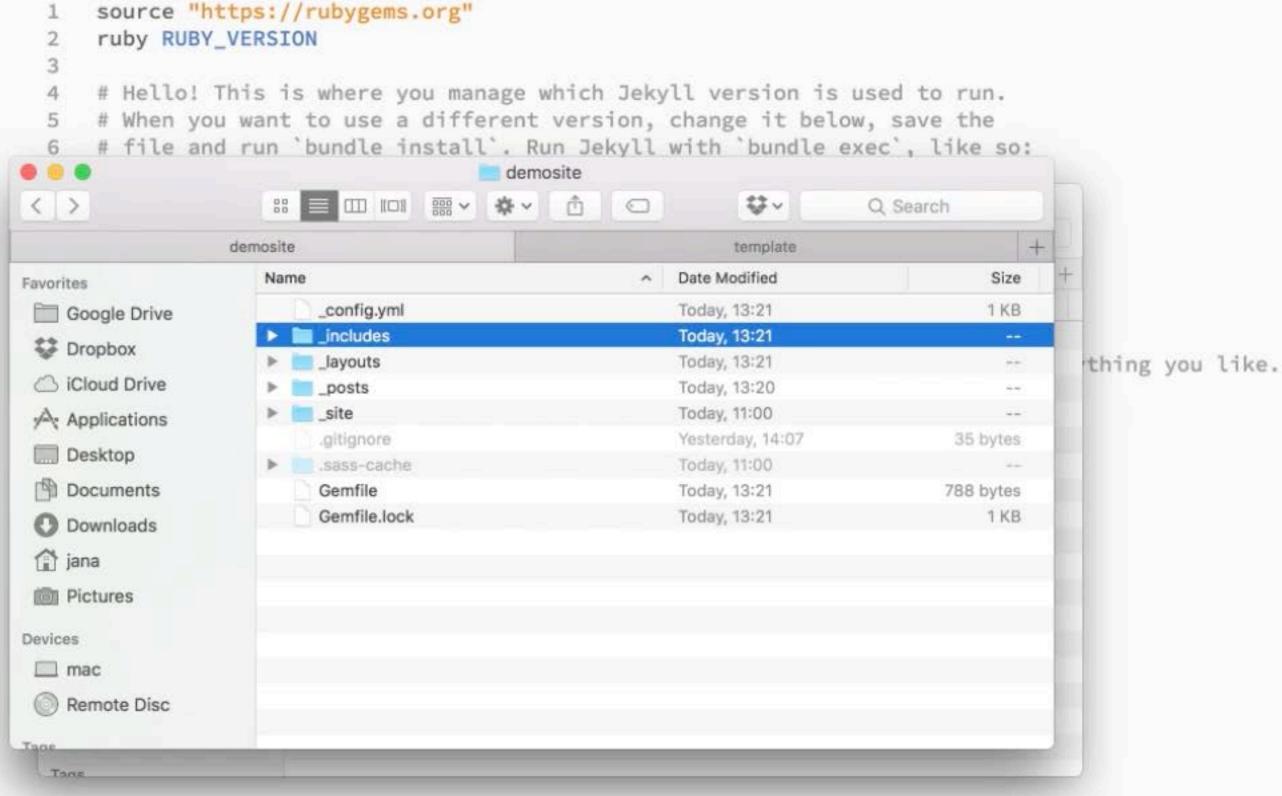



Gemfile

\_config.yml

+\_includes

► posts

gitignore

.sass-cache


Gemfile

Gemfile.lock


- source "https://rubygems.org"
- ruby RUBY\_VERSION

# Hello! This is where you manage which Jekyll version is used to run.

# When you want to use a different version, change it below, save the

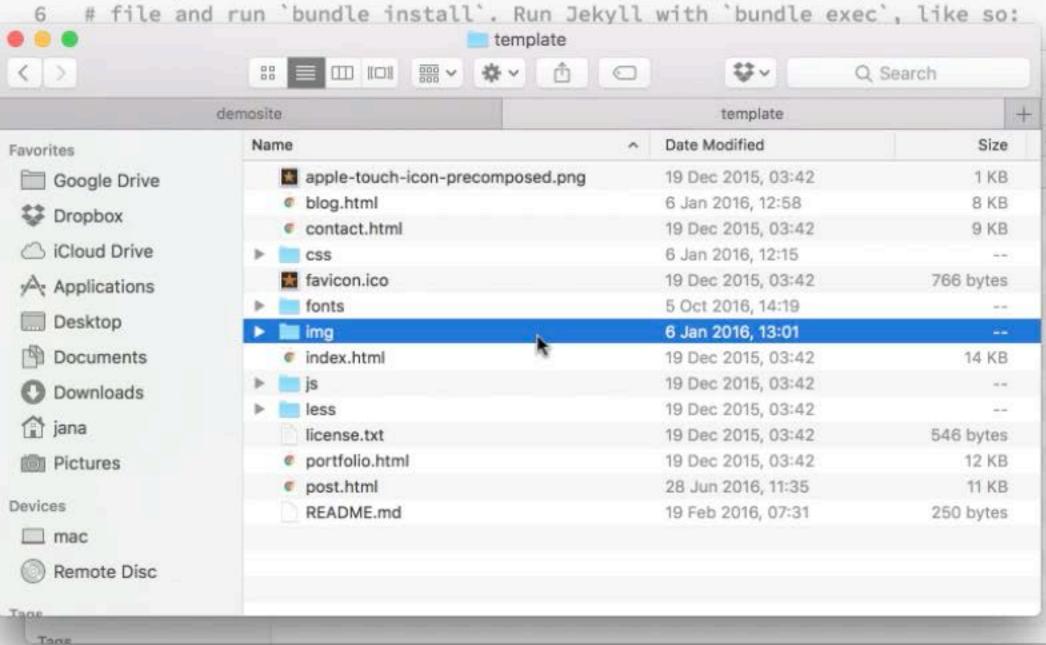

thing you like.

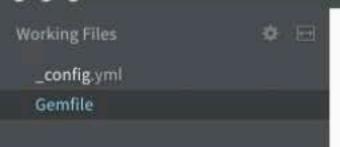

demosite •

\_config.yml

\*\_includes

\_layouts

- posts


+ \_site


gitignore


▶ sass-cache

Gemfile


Gemfile.lock

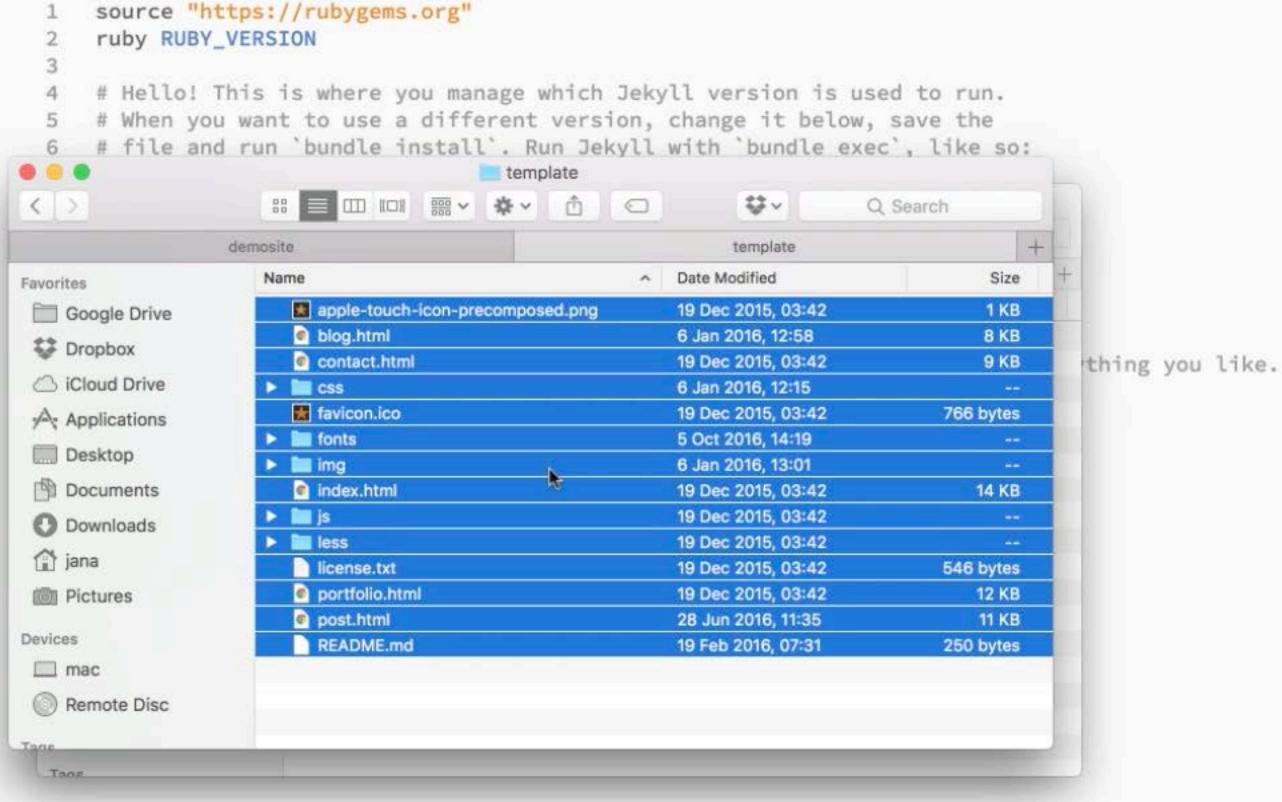


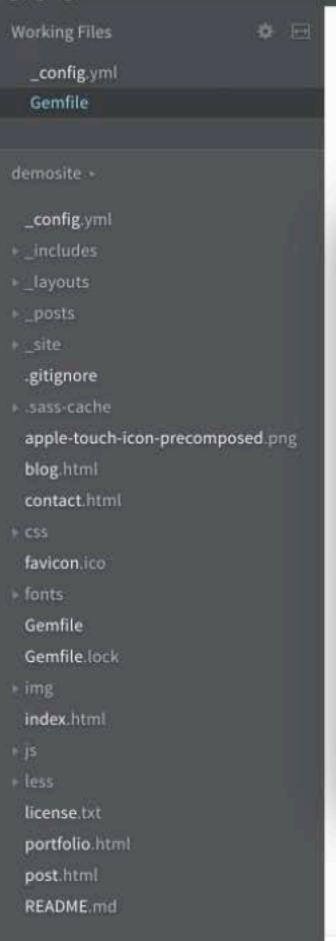


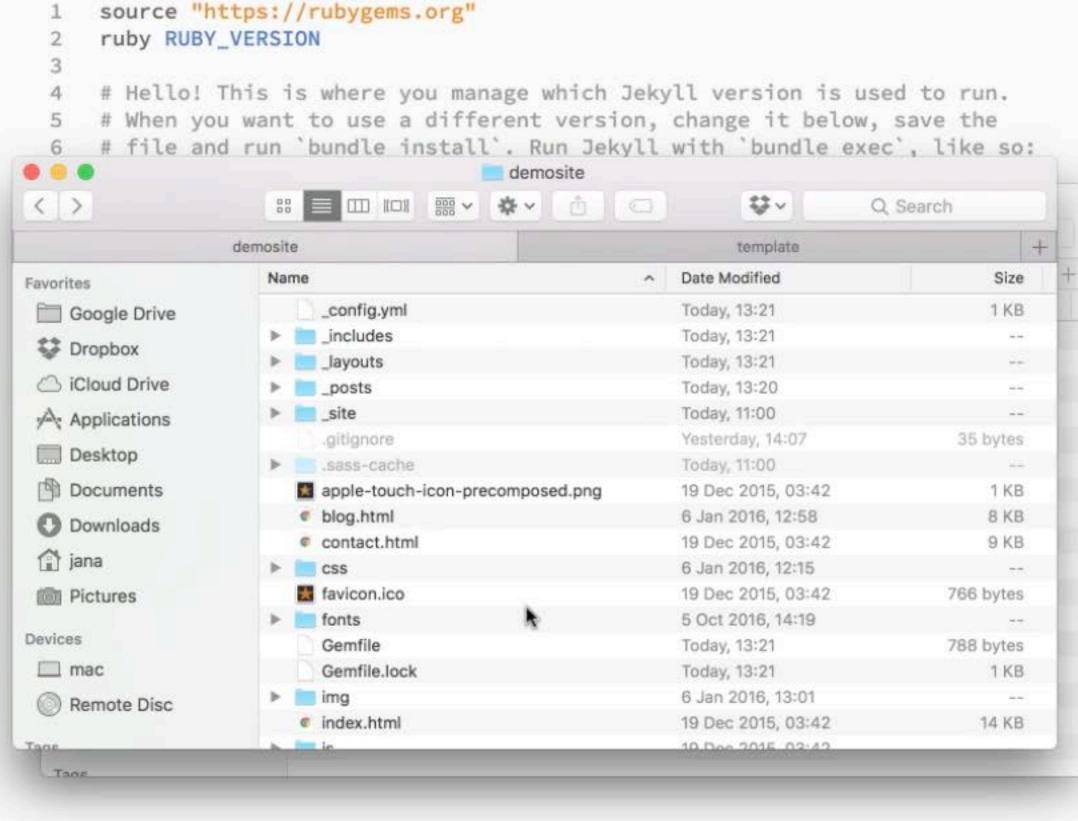


thing you like.

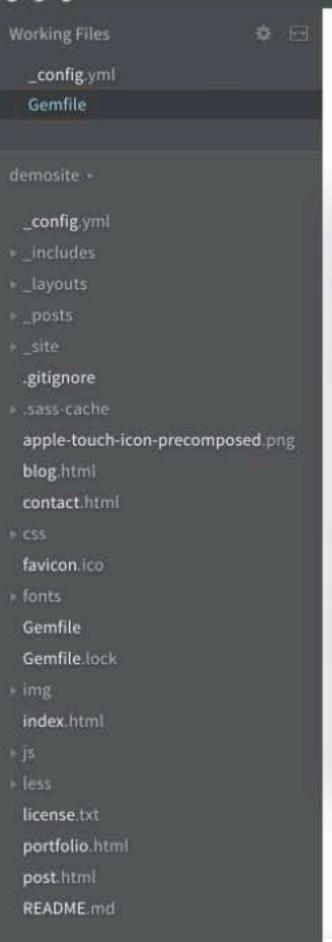


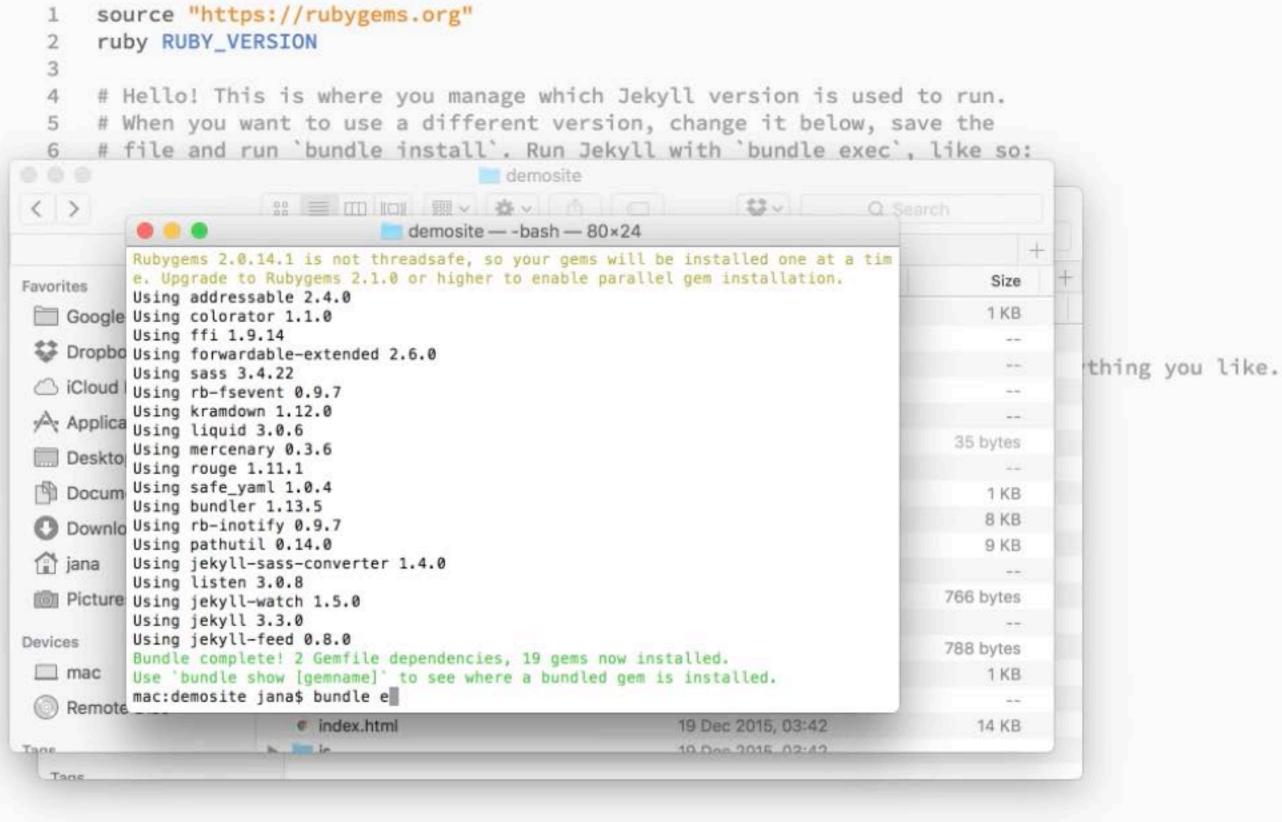

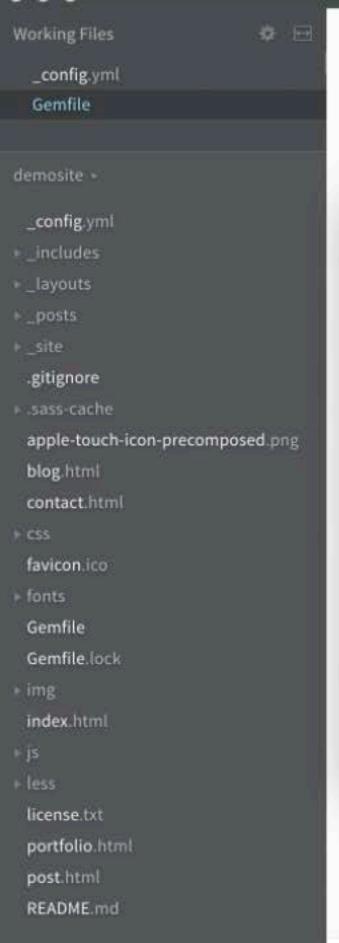

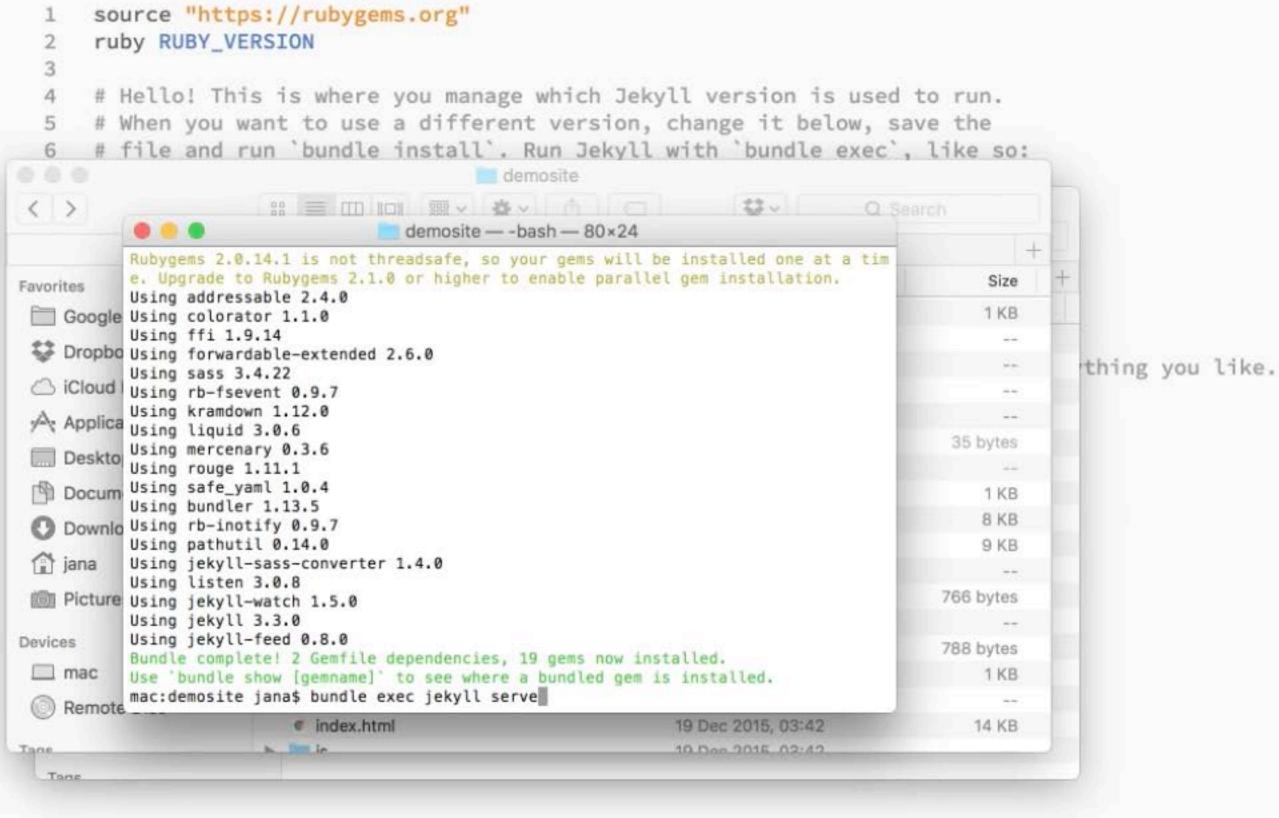



Line 14, Column 92 - 24 Lines

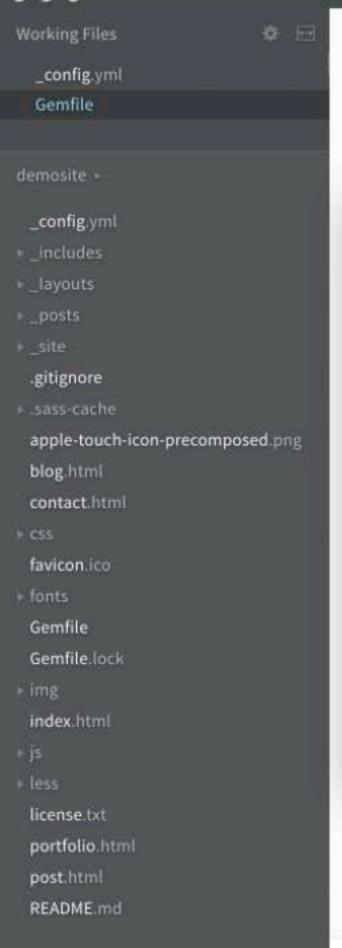


```
source "https://rubygems.org"
      ruby RUBY_VERSION
      # Hello! This is where you manage which Jekyll version is used to run.
       # When you want to use a different version, change it below, save the
        file and run 'bundle install'. Run Jekyll with 'bundle exec', like so:
                                          demosite
                      ( )
                    demosite — fsevent_watch • jekyll TERM_PROGRAM=Apple_Terminal SHELL=/...
          Using safe_yaml 1.0.4
          Using bundler 1.13.5
                                                                                          Size
Favorites
          Using rb-inotify 0.9.7
                                                                                          1 KB
 Google Using pathutil 0.14.0
          Using jekyll-sass-converter 1.4.0
 Dropbo Using listen 3.0.8
                                                                                                   thing you like.
          Using jekyll-watch 1.5.0
 iCloud Using jekyll 3.3.0
          Using jekyll-feed 0.8.0
 Applica Bundle complete! 2 Gemfile dependencies, 19 gems now installed.
                                                                                       35 bytes
         Use 'bundle show [gemname]' to see where a bundled gem is installed.
 Deskto
          mac:demosite jana$ bundle exec jekyll serve
 Docum Configuration file: /Users/jana/Desktop/demosite/_config.yml
                                                                                          1 KB
          Configuration file: /Users/jana/Desktop/demosite/_config.yml
                                                                                         8 KB
                    Source: /Users/jana/Desktop/demosite
 Downlo
                Destination: /Users/jana/Desktop/demosite/_site
                                                                                          9 KB
 jana
           Incremental build: disabled. Enable with --incremental
               Generating...
                                                                                      766 bytes
 Picture
                            done in 0.13 seconds.
           Auto-regeneration: enabled for '/Users/jana/Desktop/demosite'
          Configuration file: /Users/jana/Desktop/demosite/_config.yml
Devices
                                                                                      788 bytes
             Server address: http://127.0.0.1:4000/
 __ mac
                                                                                          1 KB
            Server running... press ctrl-c to stop.
 Remote
                         index.html
                                                             19 Dec 2015, 03:42
                                                                                         14 KB
                       h in
                                                             10 Dec 2015 02-42
  Tone
```

Line 14, Column 92 - 24 Lines

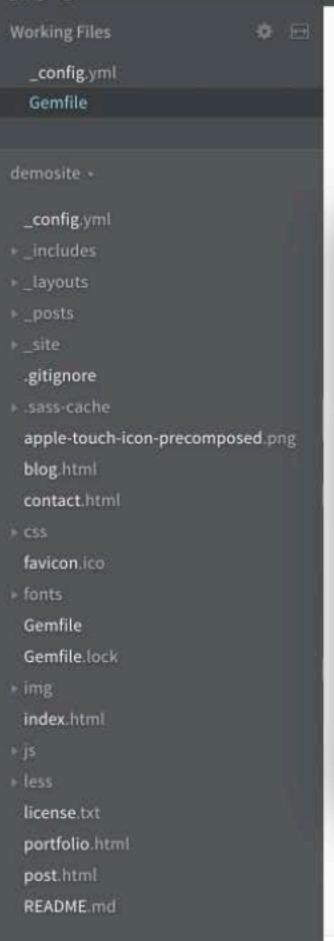

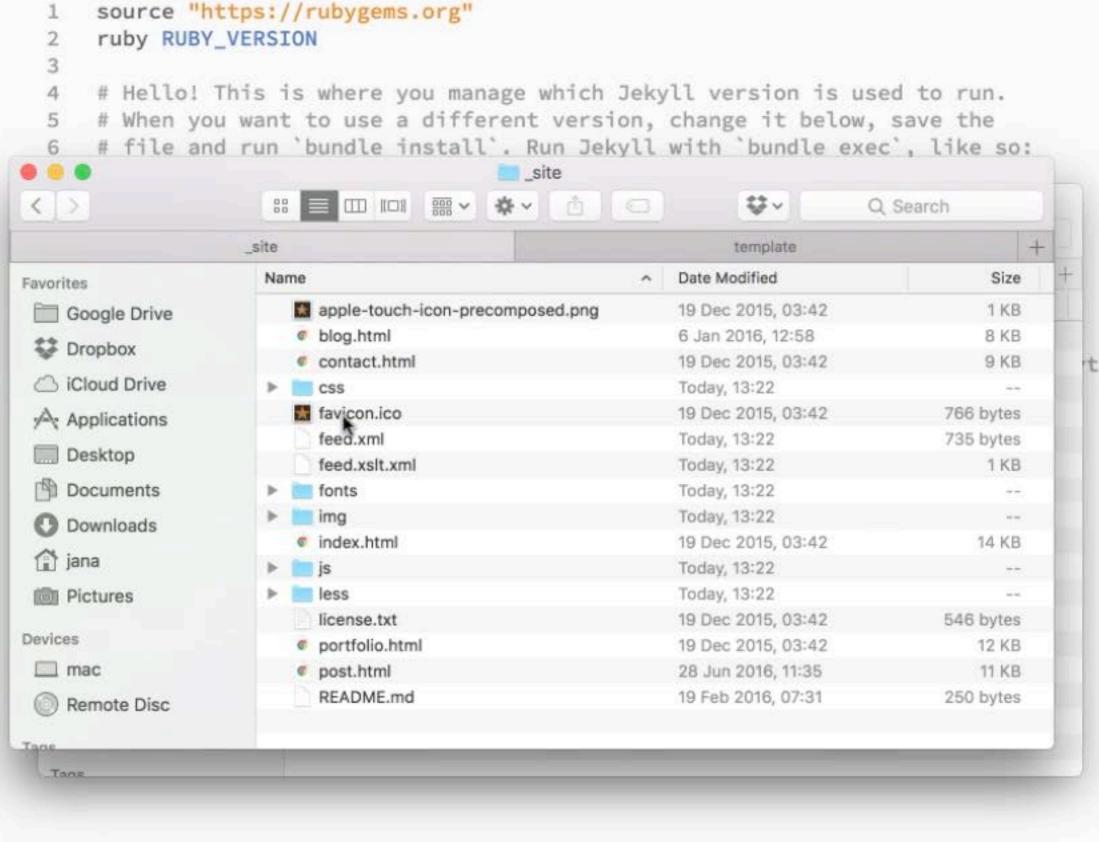

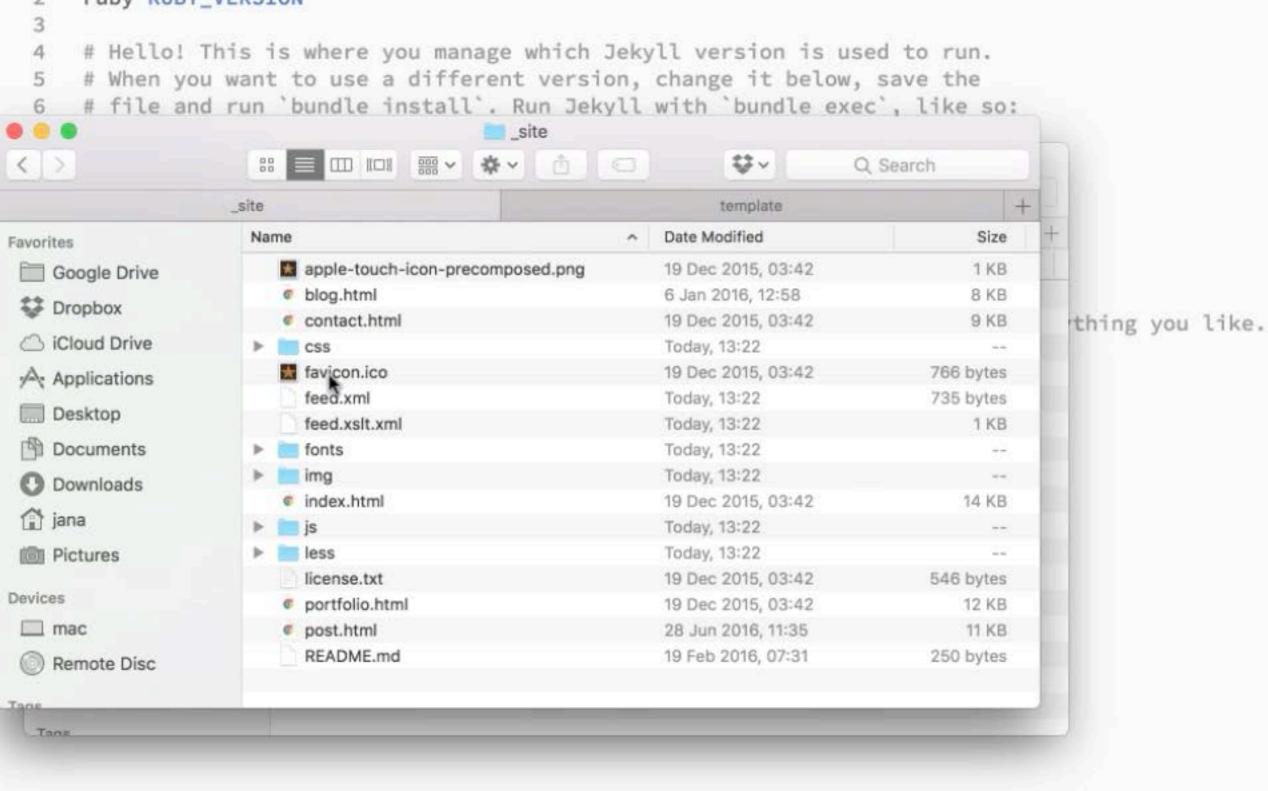

Line 14, Column 92 - 24 Lines

