
Лаба 3

Просто Лиза


List of Tables

List of Figures

0.1 Слайд №1

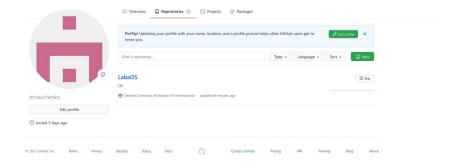

0.2 Слайд №2

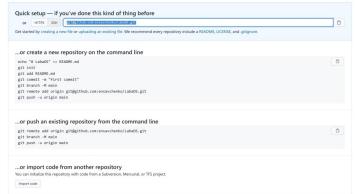


-Создайте репозиторий на GitHub.

0.3 Слайд №3

-Создала ключ

```
ensavchenko@dk4n71 ~ $ ssh-keygen -C "Elizaveta Savchenko <1032203962@pf
>"
Generating public/private rsa key pair.
Enter file in which to save the key (/afs/.dk.sci.pfu.edu.ru/home/e/n/en
enko/.ssh/id_rsa):
/afs/.dk.sci.pfu.edu.ru/home/e/n/ensavchenko/.ssh/id_rsa already exists.
Overwrite (y/n)? y
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /afs/.dk.sci.pfu.edu.ru/home/e/n/e
henko/.ssh/id_rsa
Your public key has been saved in /afs/.dk.sci.pfu.edu.ru/home/e/n/ensav
o/.ssh/id_rsa.pub
The key fingerprint is:
SHAZ56:fXKRPLY2YpGSvDrXPxyFR/kJghZMIQc6Rbfemdc4qrI Elizaveta Savchenko
03962@pfur.ru>
The key's randomart image is:
```

0.4 Слайд №4

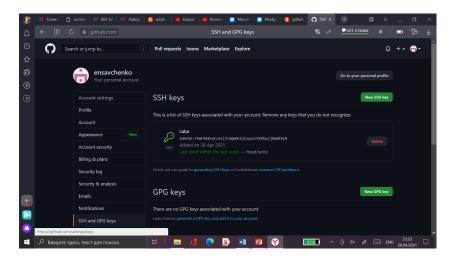

0.5 Слайд №5

{ #fig:001 width=70% }

```
wintersmith,wordpress,wyam,xamarinstudio,xcode
xcodeinjection,xilinx,xilinxise,xilinxvivado,xill
xojo,xtex, 36, yan,yeoman
yli,yil; zendframework,zephir,zig
zsh,zukencr800ensavchenko0dk8n77 /laboratory $
ensavchenko0dk8n77 /laboratory $ git commit -an "second"
ensavchenko0dk8n77 /laboratory $ git commit -an "second"
[master b59f0fb] second
2 files changed, 455 insertions(+)
create mode 100644 :gitignore
create mode 100644 :gitignore
create mode 100644 :gitignore
create mode 100647 /rlaboratory $ git push
[nepeunchene odbextons: 100% (5/5), rotono.
Ingcuer ofbextons: 100% (5/5), rotono.
Ingcuer ofbextons: 100% (4/4), fo.42 KiB | 6.42 MiB/s, rotono.
Ingcuer ofbextons: 100% (4/4), fo.42 KiB | 6.42 MiB/s, rotono.
Iotal 4 (delta 0), reused 0 (delta 0), pack-reused 0
giTo github.com:ensavchenko/laboOS.git
cf37f1a.b59f0fb master -> master
ensavchenko0dk8n77 /laboratory $ git flow init
Which branch should be used for bringing forth production releases?
- master
Branch name for production releases: [master]
Branch name for production releases: [master]
Branch name for production releases: [master]
Branch name for frouterion releases' development: [develop]

How to name your supporting branch prefixes?
feature branches? [release/] Bugfix branches? [bugfix/]
Release branches? [release/] Bugfix branches? [bugfix/]
Release branches? [release/]
Branch name for "next release/" git flow release start 1.0.0
[nepexmeuen has how a branch 'release/1.0.0'
Version tag prefix? [
Version tag prefix? [
Version tag prefix? [
Vourse prefix? [
Vourse prefix? ]
Vourse not not not prefixes a filt of wellop of the production release start 1.0.0
[nepexmeuen has not prefixes]
Summary of actions:


- A new branch 'release/1.0.0' was created, based on 'develop'
- You are now on branch 'release/1.0.0'
Follow-up actions:

- Bump the version number now!

- Start committing last-minute fixes in preparing your release
```


0.6 Слайд №6

[](image/image3.10.jpeg.jpg{ #fig:001 width=70% }

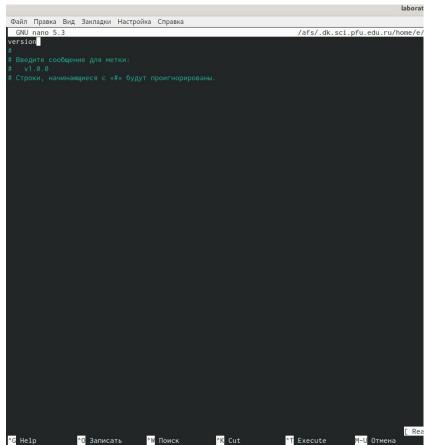


-Отправим на github: git push


0.7 Слайд №7

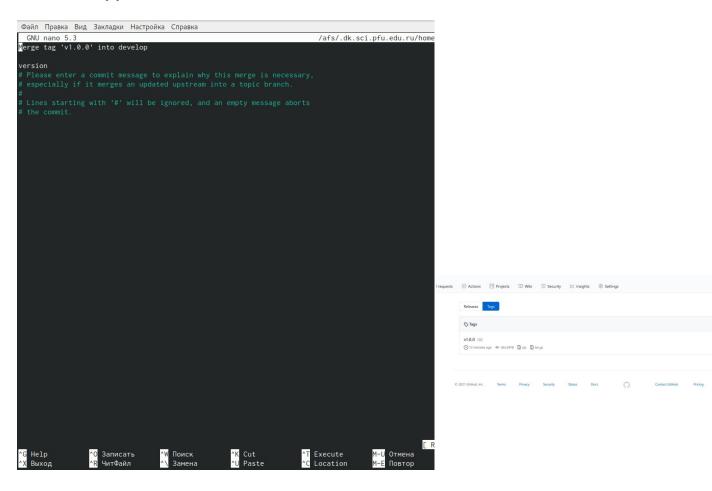

0.8 Слайд №8

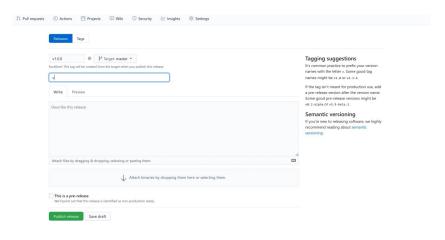

0.9 Слайд №9

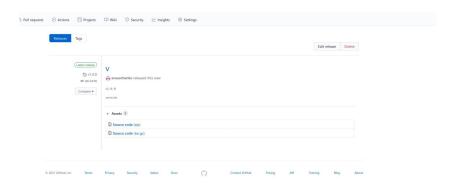

0.10 Слайд №10

Выводы

В результате лабораторной работы я узнала, как устанавливается запись самостоятельной работы и как вести трансляцию выполнения лабораторной работы. Затем я узнала, с помощью каких команд можно проанализировать последовательность загрузки системы. Я описала, каждую команду, приведя фотографии своей работы в виде образца.