
System architecture


A Vue application and one Express backend combine core capabilities with HP Engineering modules.

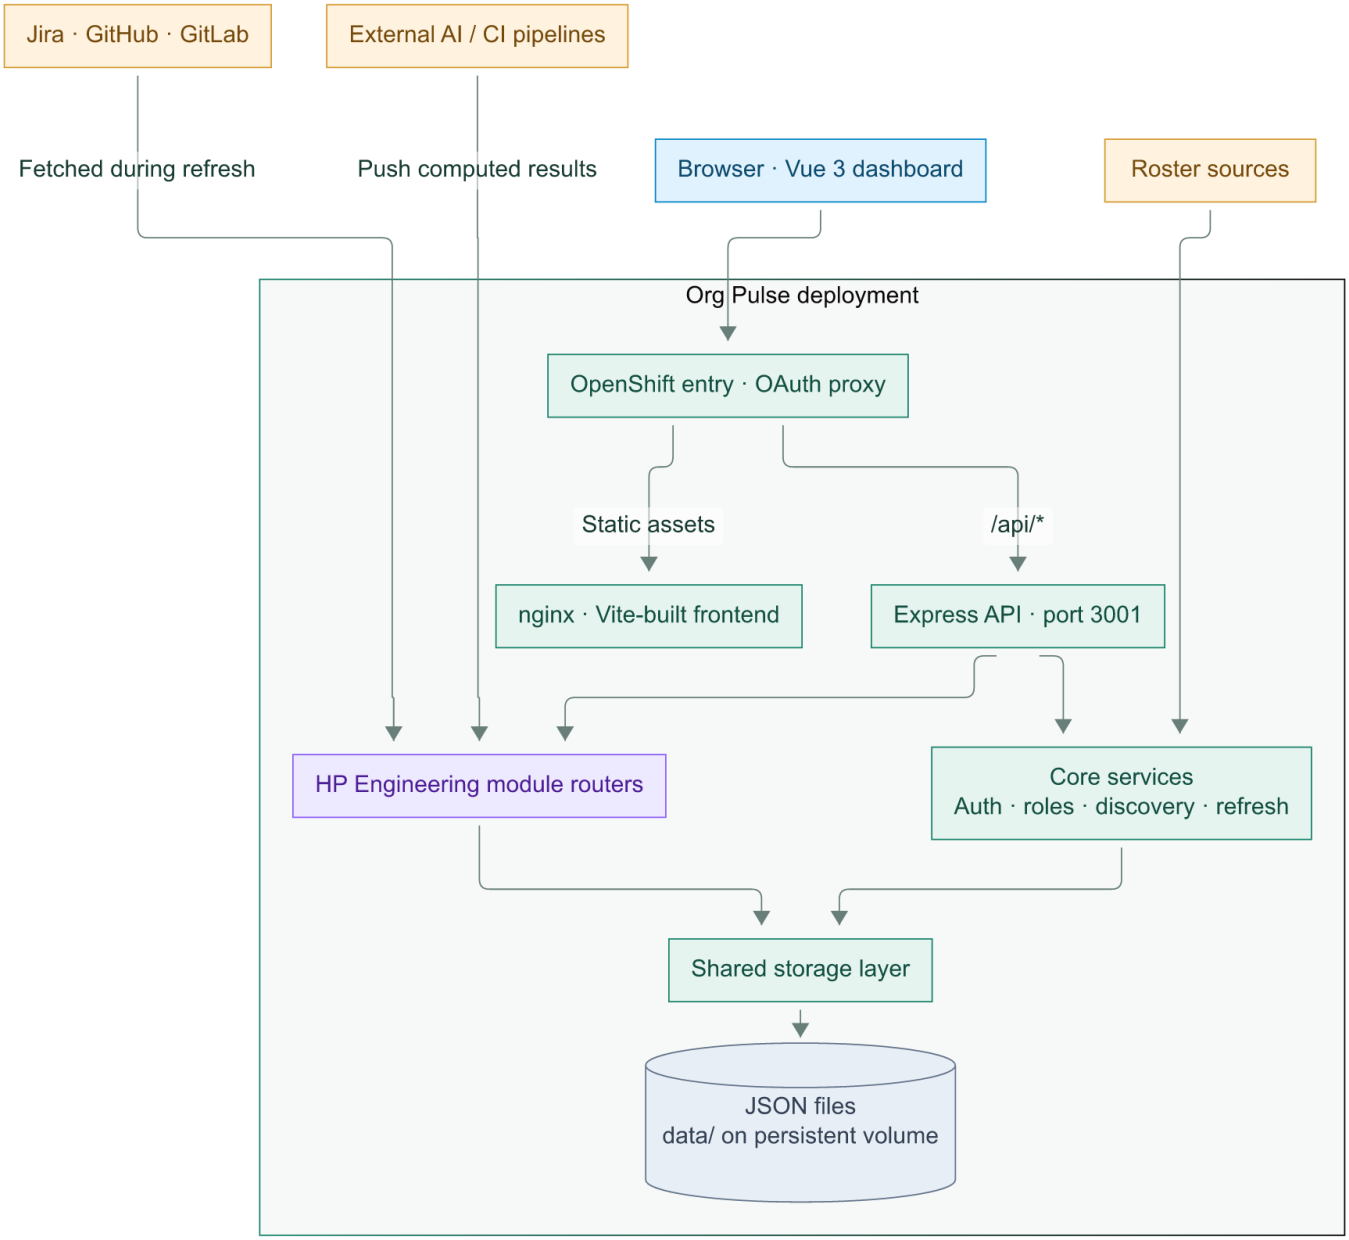

Logical production view. Exact OpenShift Route, Service, and OAuth wiring is managed outside this checkout. Filesystem storage is the documented default; core also supports optional MongoDB backing for some stores.

Authentication


People sign in through OpenShift OAuth. Automation uses scoped Org Pulse API tokens.

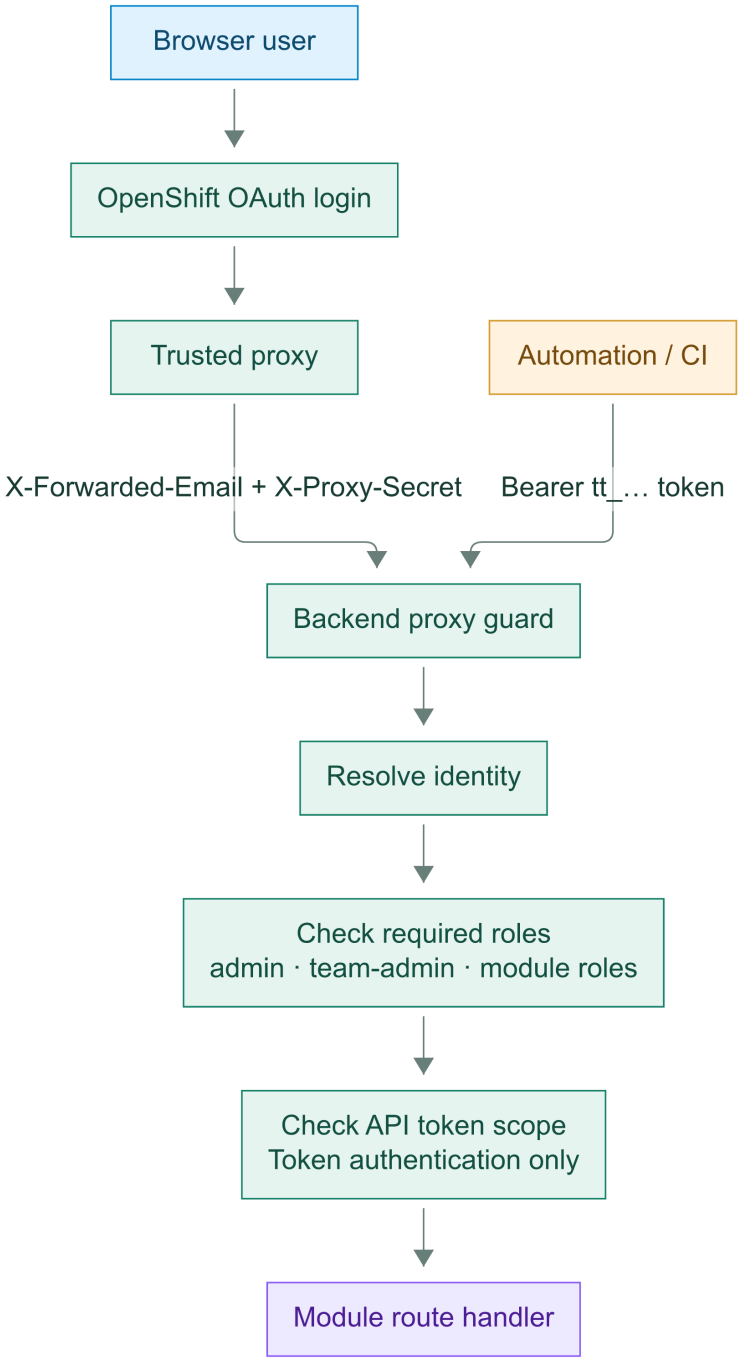

The proxy guard enforces X-Proxy-Secret when PROXY_AUTH_SECRET is configured, with exceptions for selected public endpoints and valid API tokens. Token scopes supplement the required user roles. Local development falls back to the first ADMIN_EMAILS entry. External API routing for automation depends on deployment configuration.

Data workflow


Refresh handlers cache upstream data; external pipelines push computed assessments and snapshots. Views read the resulting datasets.

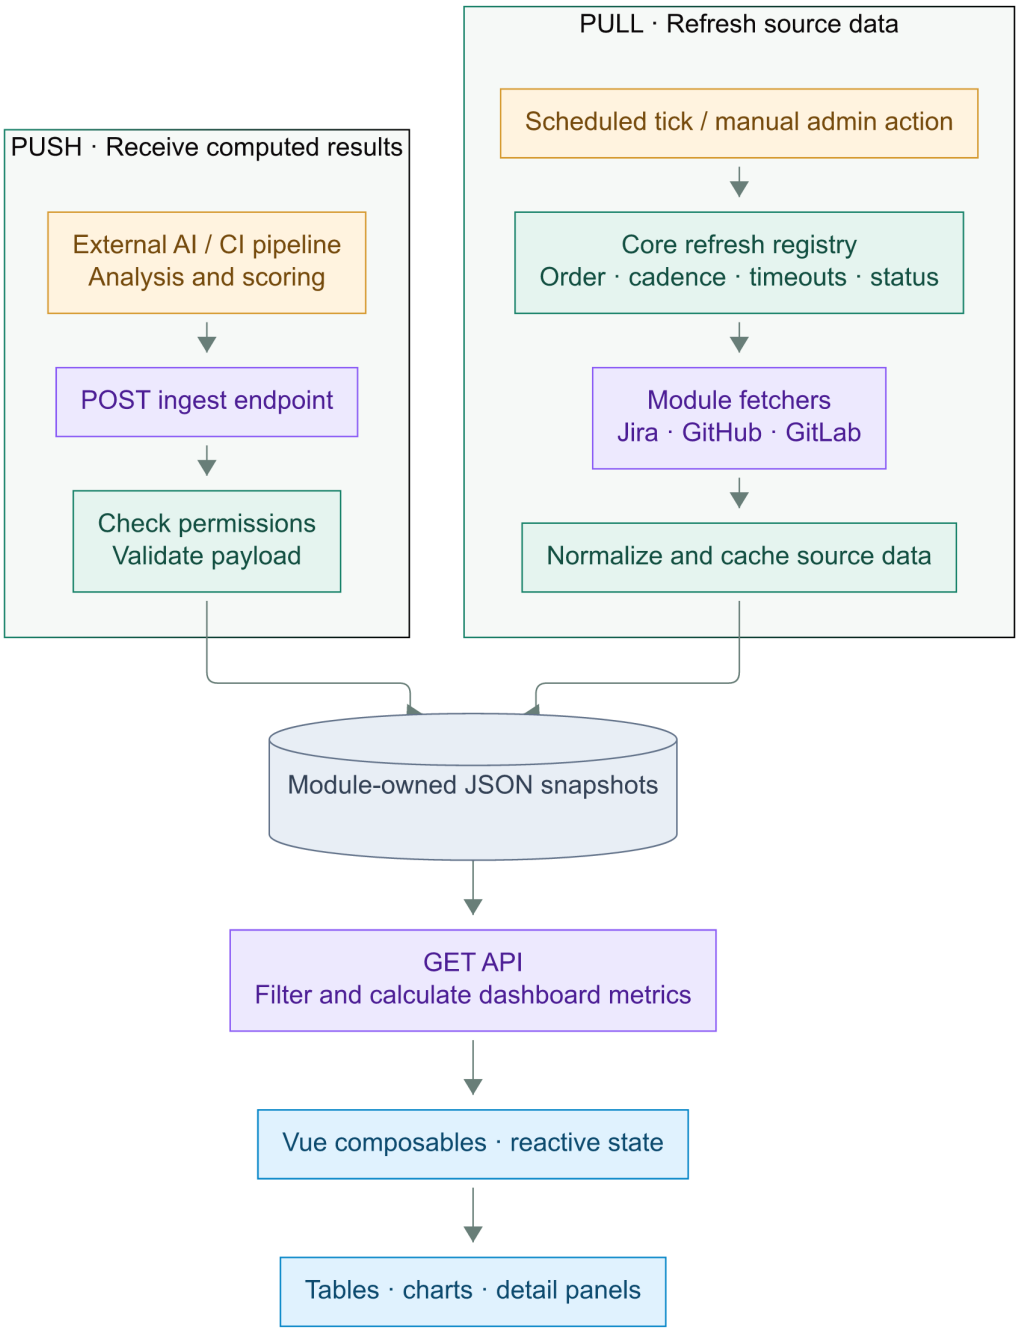

The documented scheduler ticks every 15 minutes; most handlers have a 24-hour default cadence. CVE Triage and Backport Tracker can fetch on an initial cache miss. Heavy AI analysis belongs in external pipelines; the app still calculates dashboard metrics. Demo storage reads fixtures and ignores writes.

Roster workflow

The Python exporter reads Cyborg data and writes a complete-roster snapshot. Core validates the published snapshot before syncing people.

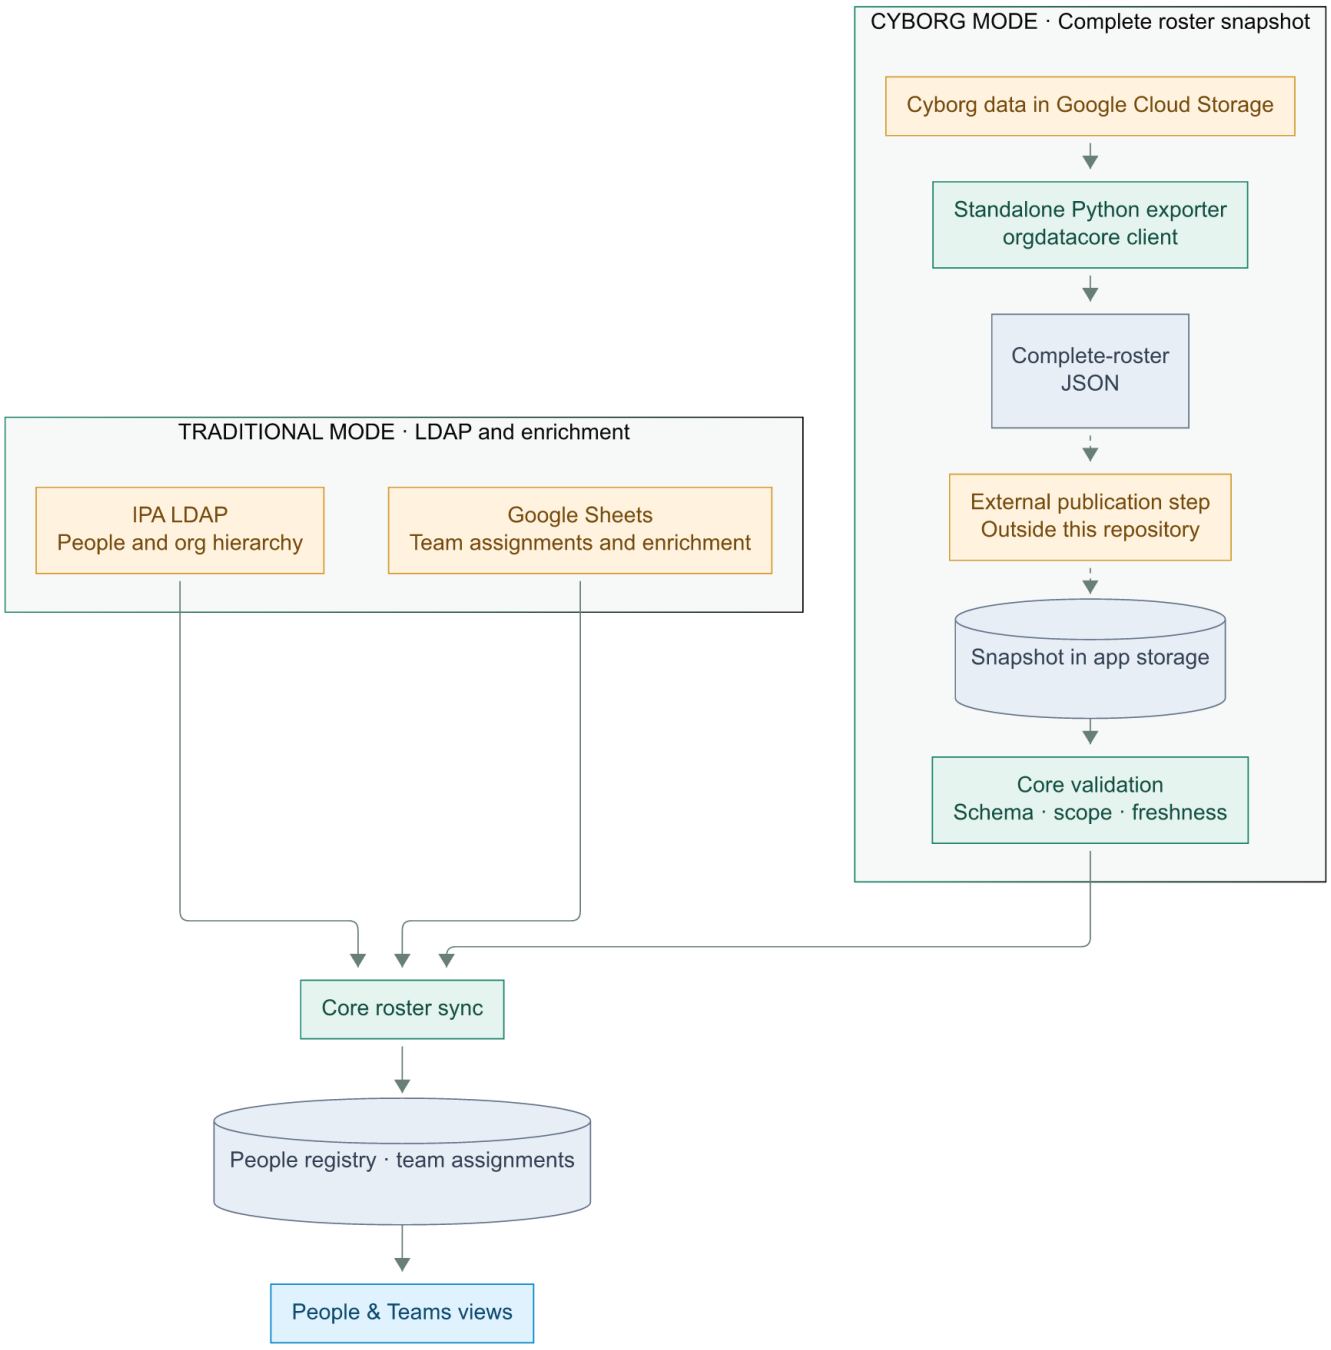

These are alternative roster modes: Cyborg replaces the LDAP/Sheets path. Dashed arrows mark publication work outside this repository. The dashboard reads a snapshot through its storage abstraction and does not call GCS directly. Exporter scheduling and destination publication are handled separately.