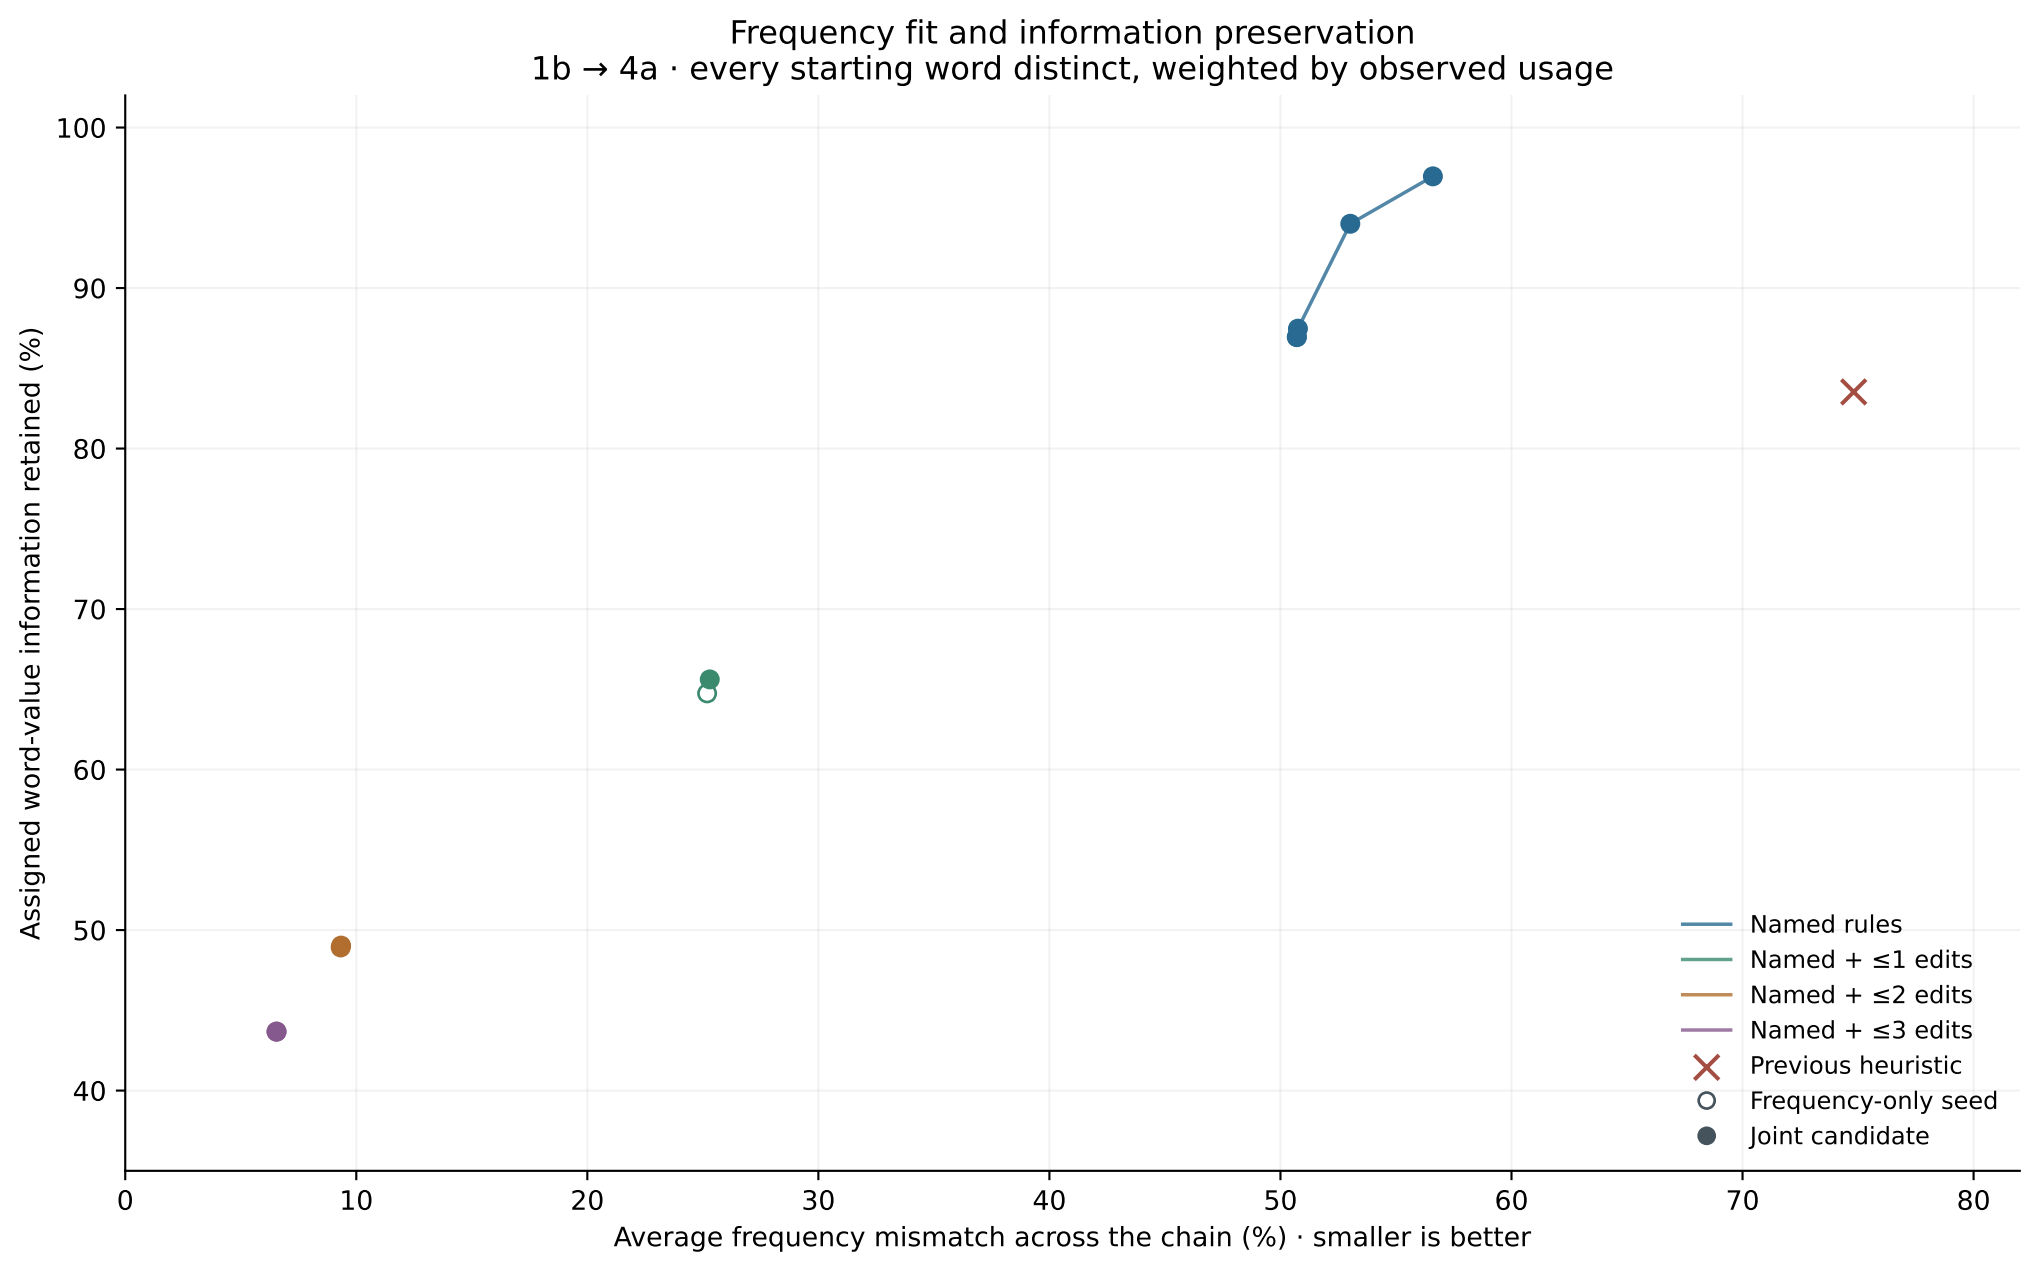
Frequency fit and information preservation
1b → 4a · every starting word distinct, weighted by observed usage
Assigned word-value information retained (%)
100
90
80
70
60
50
40
0
10
20
30
40
50
60
70
80
Average frequency mismatch across the chain (%) · smaller is better
Named rules
Named + ≤1 edits
Named + ≤2 edits
Named + ≤3 edits
Previous heuristic
Frequency-only seed
Joint candidate