

Time Series Event Detection: Open Challenges and Future Directions



Data Analytics Lab

dal.global@grupo.cefet-rj.br | <https://eic.cefet-rj.br/dal>



A broad, active, and evolving field

This presentation shifts the central question: we move beyond simply asking *how to detect* and begin investigating *what still needs to be resolved*. The field spans statistical methods, data mining, machine learning, and real-time monitoring systems — growing in multiple directions simultaneously. What emerges from this panoramic view is not fragmentation, but organization into complementary sub-areas, each with its own hypotheses, metrics, and open challenges.

Anomaly Detection

Seeks deviations and rare behaviors relative to the expected pattern of the time series.

Change Point Detection

Locates transitions between distinct regimes, identifying where the behavior of the series changes structurally.

Motif Discovery

Discovers recurring patterns and, indirectly, discords — subsequences that deviate from the most frequent motifs.

Systematic Map of Production

Queries conducted in Scopus on November 29, 2023, restricted to **time series**, cover four subareas: **event detection**, **anomaly**, **change point/concept drift**, and **motif**. The volume and profile of each area reveal distinct priorities within the scientific community.

Anomaly Detection

Presents the **highest publication volume** among the subareas, reflecting high demand for identifying anomalous behavior in time series across domains such as healthcare, finance, and industry.


Change Point & Concept Drift

Form a **consolidated research line** with a strong statistical foundation, bringing together works on structural change detection and adaptation to non-stationary distributions over time.

Motif Discovery

Smaller in volume, but **central to recurring patterns**: identifies subsequences that repeat in time series, with applications in behavior recognition and data compression.

Publication trends over time

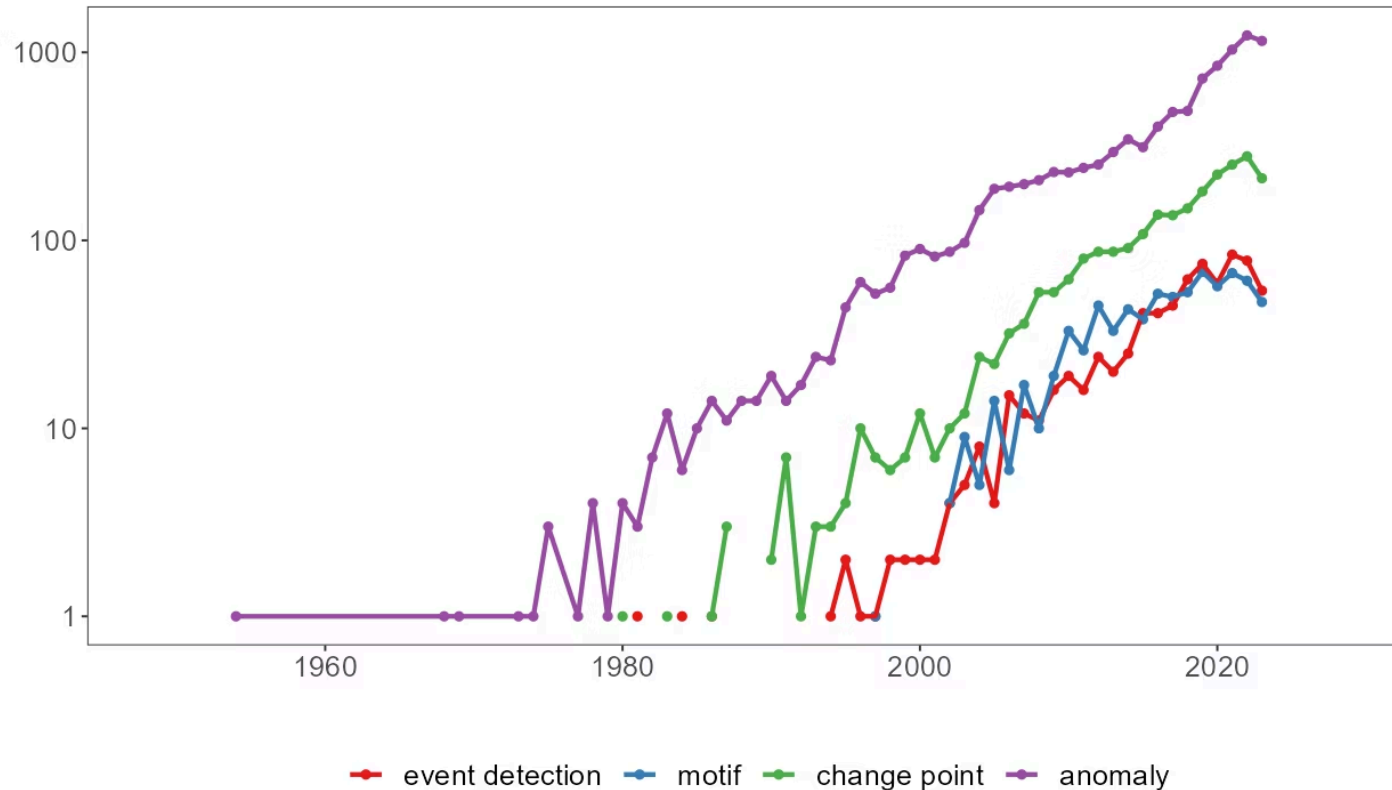

- Anomalies dominate scientific output
- Change points grow strongly after the 1980s
- Event detection consolidates as a more general term from the 2000s onward
- Motifs appear more recently and with a stable pace

Number of publications on a logarithmic scale across the main event detection areas.

Intersections between areas

Real time series frequently contain anomalies, regime changes, and recurring patterns simultaneously — which makes the boundaries between areas porous and complementary.

Event detection ↔ Anomaly

Main connection of the general area: event detection frequently relies on anomaly methods to identify relevant occurrences.

Anomaly ↔ Change point

Expressive intersection, especially in non-stationary series, where regime changes can be indistinguishable from structural anomalies.

Anomaly ↔ Motif

Encounter when discords enter the discussion: unusual subsequences (discords) are, at the same time, anomalies and anti-motifs.

A unified view can produce more robust detectors and better interpretations.

Vocabulary of Subareas

Beyond publication counts, vocabulary reveals the identity of each subarea — dominant methods, applications, and concerns.

Event Detection

Systems, data mining, learning; operational focus between methods and practical use.

Change Point

Strong statistical vocabulary; concept drift connects temporal change with adaptive learning.

Anomaly Detection

Strongly application-driven; sensors, climate, networks; anomaly depends on context.

Motif Discovery

Patterns, subsequences, discovery; logic of recurring shape discovery, not point classification.

Challenges: Scale and Multivariability

Multivariate Series

- Modern sources collect many variables over time
- Events can emerge from relationships between dimensions, not just from a single isolated series
- Dimensionality, dependency, and interpretability make the problem more difficult

Scale and Big Data

- Sensors, social networks, and industrial systems generate long and fast-moving series
- Traditional methods may fail in terms of cost, memory, or latency
- Spark, Kafka, and Flink appear as infrastructure for scalable workflows

Challenges: Online Detection and Metrics

Online Detection

- In streaming, there is no complete series to analyze.
- The detector must decide on the fly, with limited memory and changing data.
- Anomalies close to drift or change points can be especially ambiguous.

Metrics for Events

- Unified metrics for point, interval, and online events are still lacking.
- Temporal tolerance needs to be handled consistently.
- Metrics must evolve as new data arrives in streaming.

Challenges: Explainability and Unified View

Explainability

- Complex detectors can act as black boxes.
- In healthcare, finance, and security, explaining the event is just as important as detecting it.
- SHAP, LIME, and interactive visualization can inspire more reliable solutions.

Unified View

- Anomalies, change points, and motifs are still studied as separate problems.
- Real-world time series frequently combine all three event types.
- A broader detector should integrate evidence of deviation, change, and recurrence.

Research Trends and Opportunities

Transfer Learning

- Models trained in one domain don't always generalize to another.
- Transfer learning can reduce label dependency in the new domain.
- Adaptation in multivariate time series is still underexplored.

Adversarial Robustness

- Small adjustments to data can fool detectors.
- ML models need to be evaluated against intentional manipulation.
- Robustness is a requirement in critical decisions.

Edge and Energy Efficiency

- IoT and wearables have strict energy and memory constraints.
- Detectors need to be lightweight without losing reliability.
- Energy efficiency will be a requirement for large-scale deployment.

LLMs and Series as Tokens

- Discretized series treated as token sequences.
- Pre-training on large collections and fine-tuning per task.
- Promising for low-label scenarios.

Event Association

- Events can form sequences and causal relationships.
- Small anomalies may precede relevant change points.
- Brings detection closer to sequence mining and causal reasoning.

Hybrid Methods

- Combine anomaly, change, and recurrence in the same pipeline.
- Advantage: capturing different phenomena simultaneously.
- Challenge: integrating outputs, metrics, and explanations without opacity.

Gaps and practical agenda


What is still missing

- Representative benchmarks.
- Adequate temporal metrics (point, interval, tolerance, delay).
- Understandable explanations for domain experts.
- Computational cost compatible with continuous operation.

Practical agenda


1. Clearly choose the type of event (anomaly, change point, motif).
2. Define the scenario: offline, online, or predictive.
3. Use a metric consistent with the event type and temporal tolerance.
4. Combine methods when the series has multiple types of events.

Bibliographic References

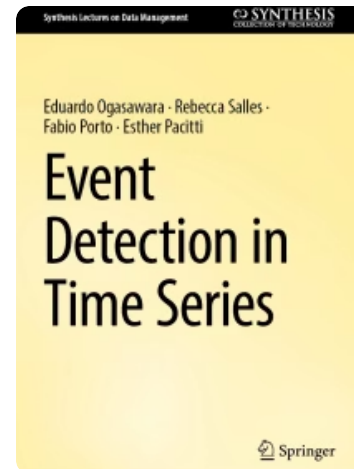


Event Detection in Time Series

Ogasawara, E.; Salles, R.; Porto, F.;
Pacitti, E. Springer Nature Switzerland,
2025.

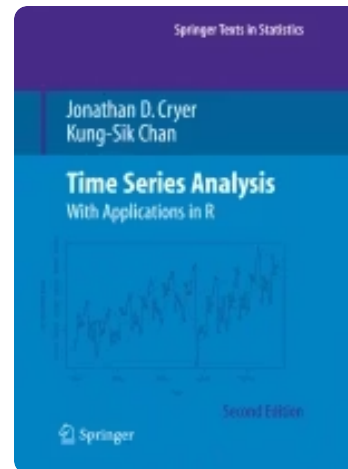

Time Series Analysis: With Applications in R

Cryer, J. D.; Chan, K.-S. Springer, 2008.

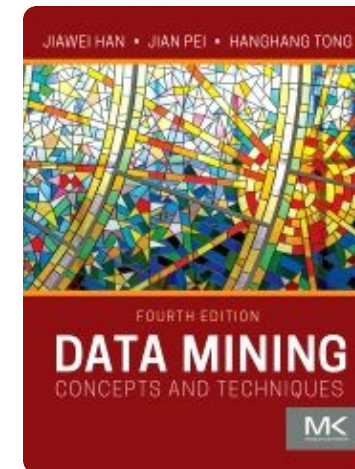

Data Mining: Concepts and Techniques

Han, J.; Pei, J.; Tong, H. Morgan
Kaufmann, 4th ed., 2022.