



# Before

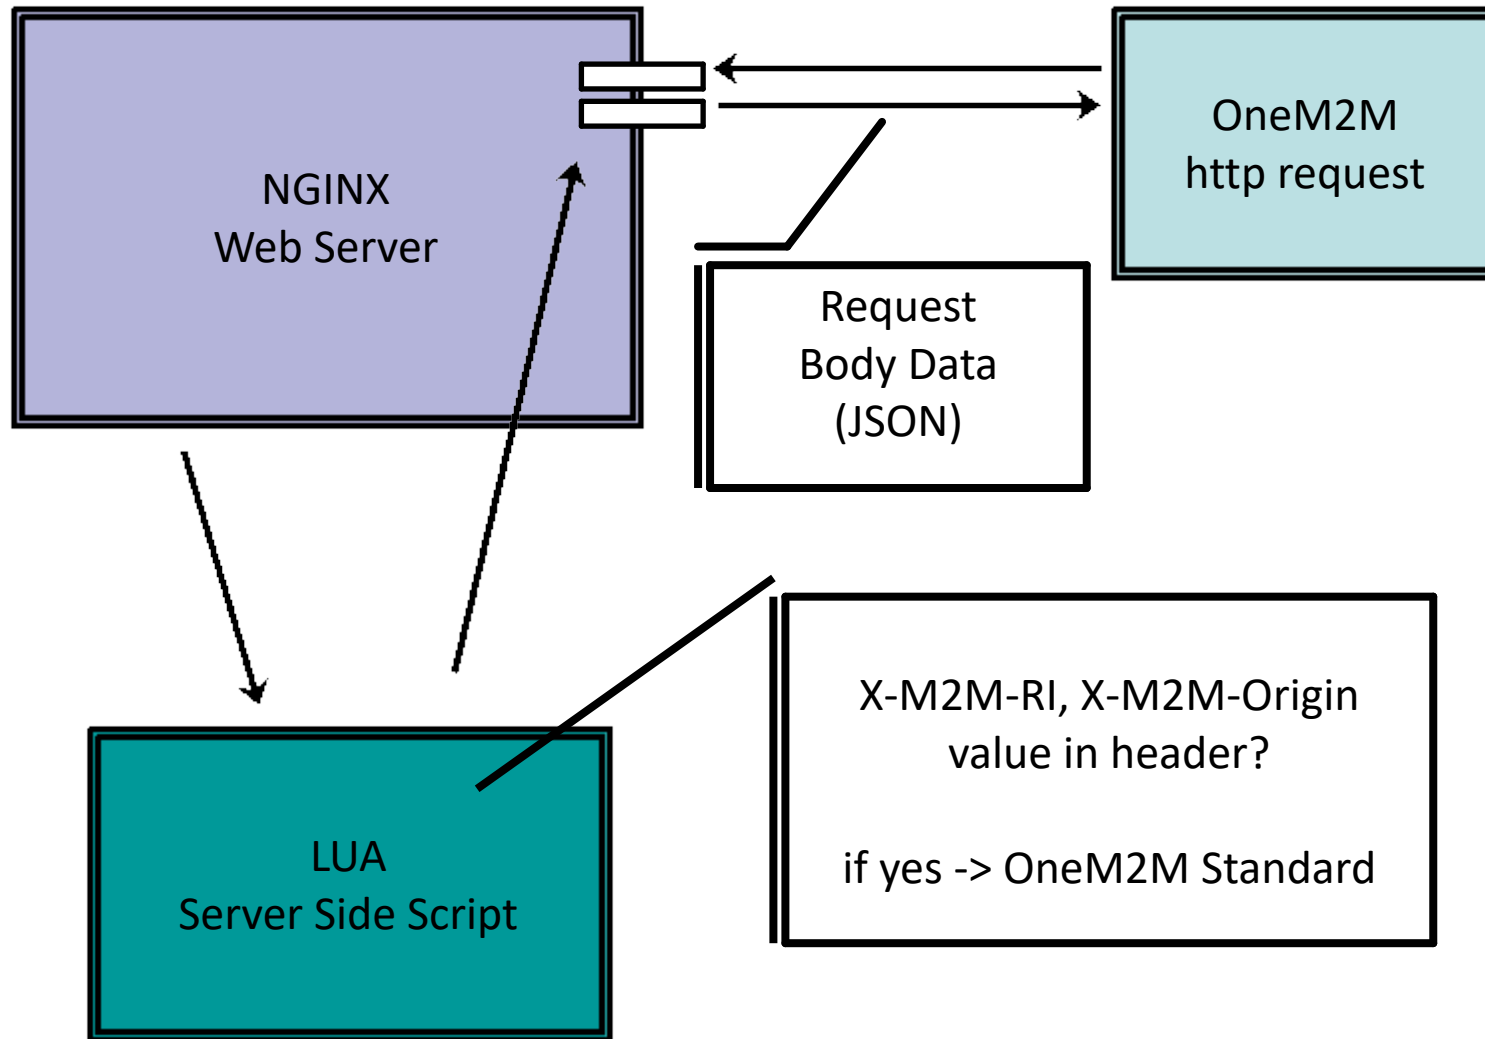

After

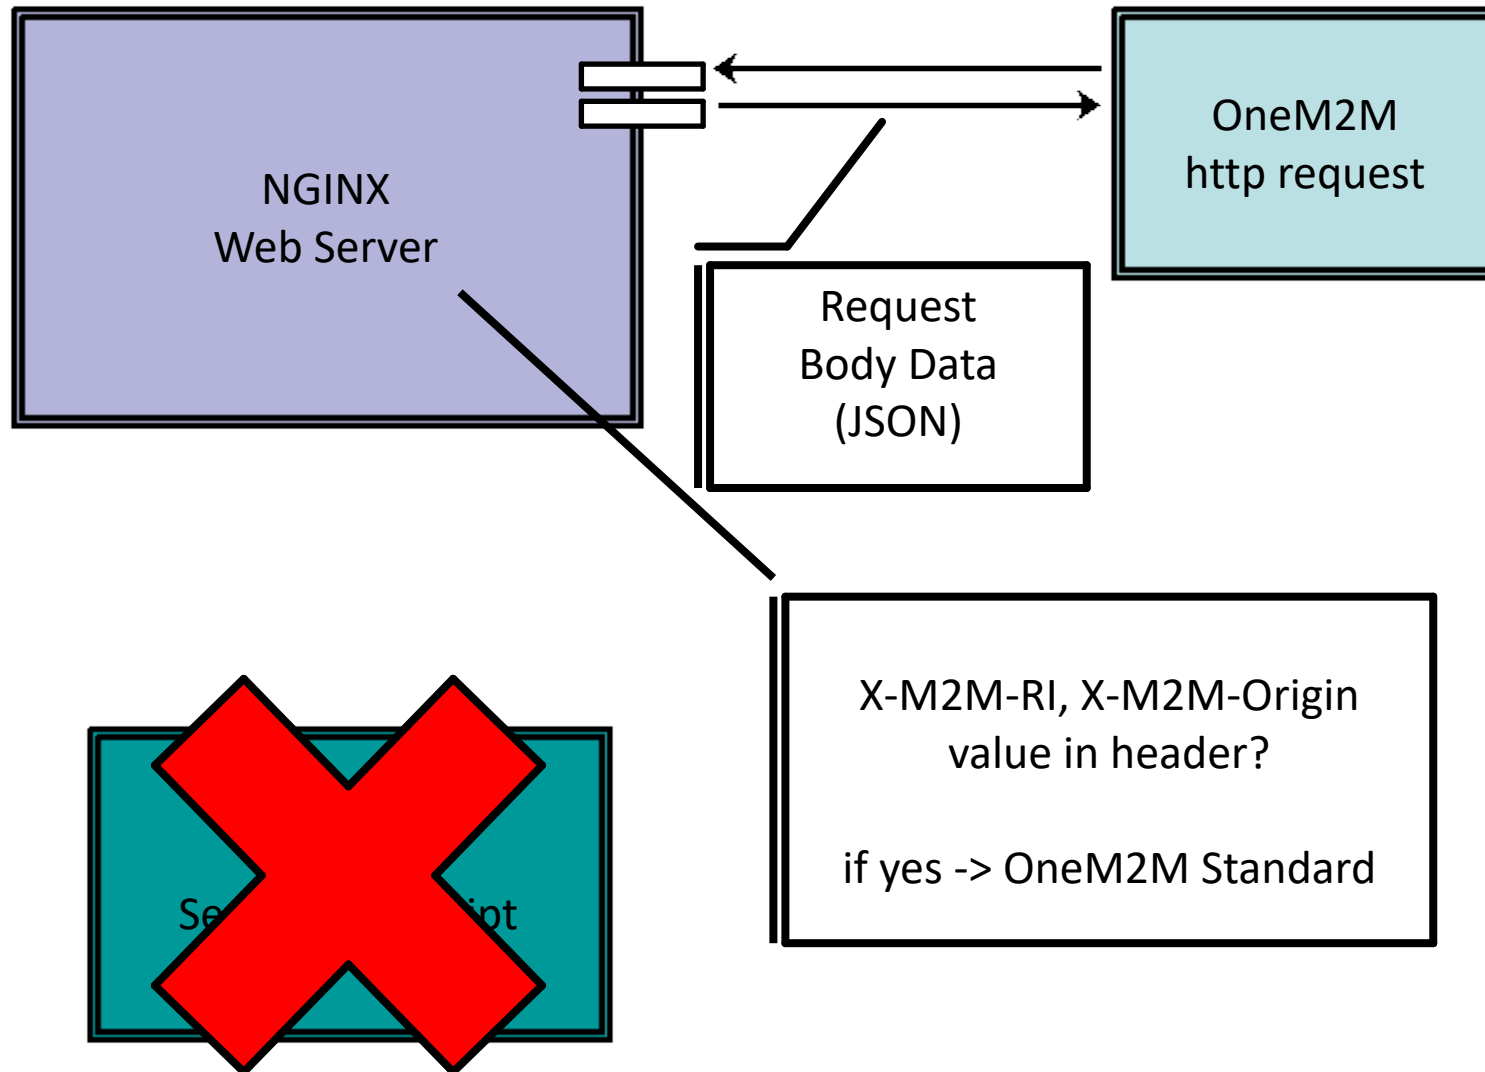

# Postman

```
{
  "m2m:ae": {
    "api": "tiny_project",
    "rr": true,
    "rn": "ae_test"
  }
}
```

request body value

```
{
  "m2m:ae": {
    "api": "tiny_project",
    "rr": true,
    "rn": "ae_test"
  }
}
```

header has x-m2m-origin, x-m2m-ri value

```
It is not OneM2M standard
```

header does not have x-m2m-origin, x-m2m-ri value

# Server Config Script

```
location /OneM2M {  
    if ($http_x_m2m_r1 = '') {  
        return 200 "It is not OneM2M standard";  
    }  
  
    if ($http_x_m2m_origin = '') {  
        return 200 "It is not OneM2M standard";  
    }  
  
    echo_read_request_body;  
    echo $request_body;  
}
```

3번 슬라이드는  
<http://host/OneM2M> 으로 패  
킷을 보낸 결과입니다.

\$http\_name 은 http 헤더 필드 값을 저장하는  
환경 변수명이고 필드가 없거나 값이 존재하지  
않으면 변수 값이 "가 됩니다. 다중 조건 설정은  
지원하지 않아서 2개의 필드에 대해서 if문은 2  
개가 필요합니다.

\$request\_body는 request body 값을 저장하  
는 환경 변수이지만 항상 그 값을 저장하고  
있지 않고 body 값을 필요로 할 때만 값을  
읽어 옵니다. 여기서는 echo 모듈을 통해 그  
값을 읽어왔습니다.