


Personal Library – Frontend Interaction Sequence

UML Sequence

One round trip: user gesture → view → store → typed event bus → gateway → adapter → HTTP → store → re-render

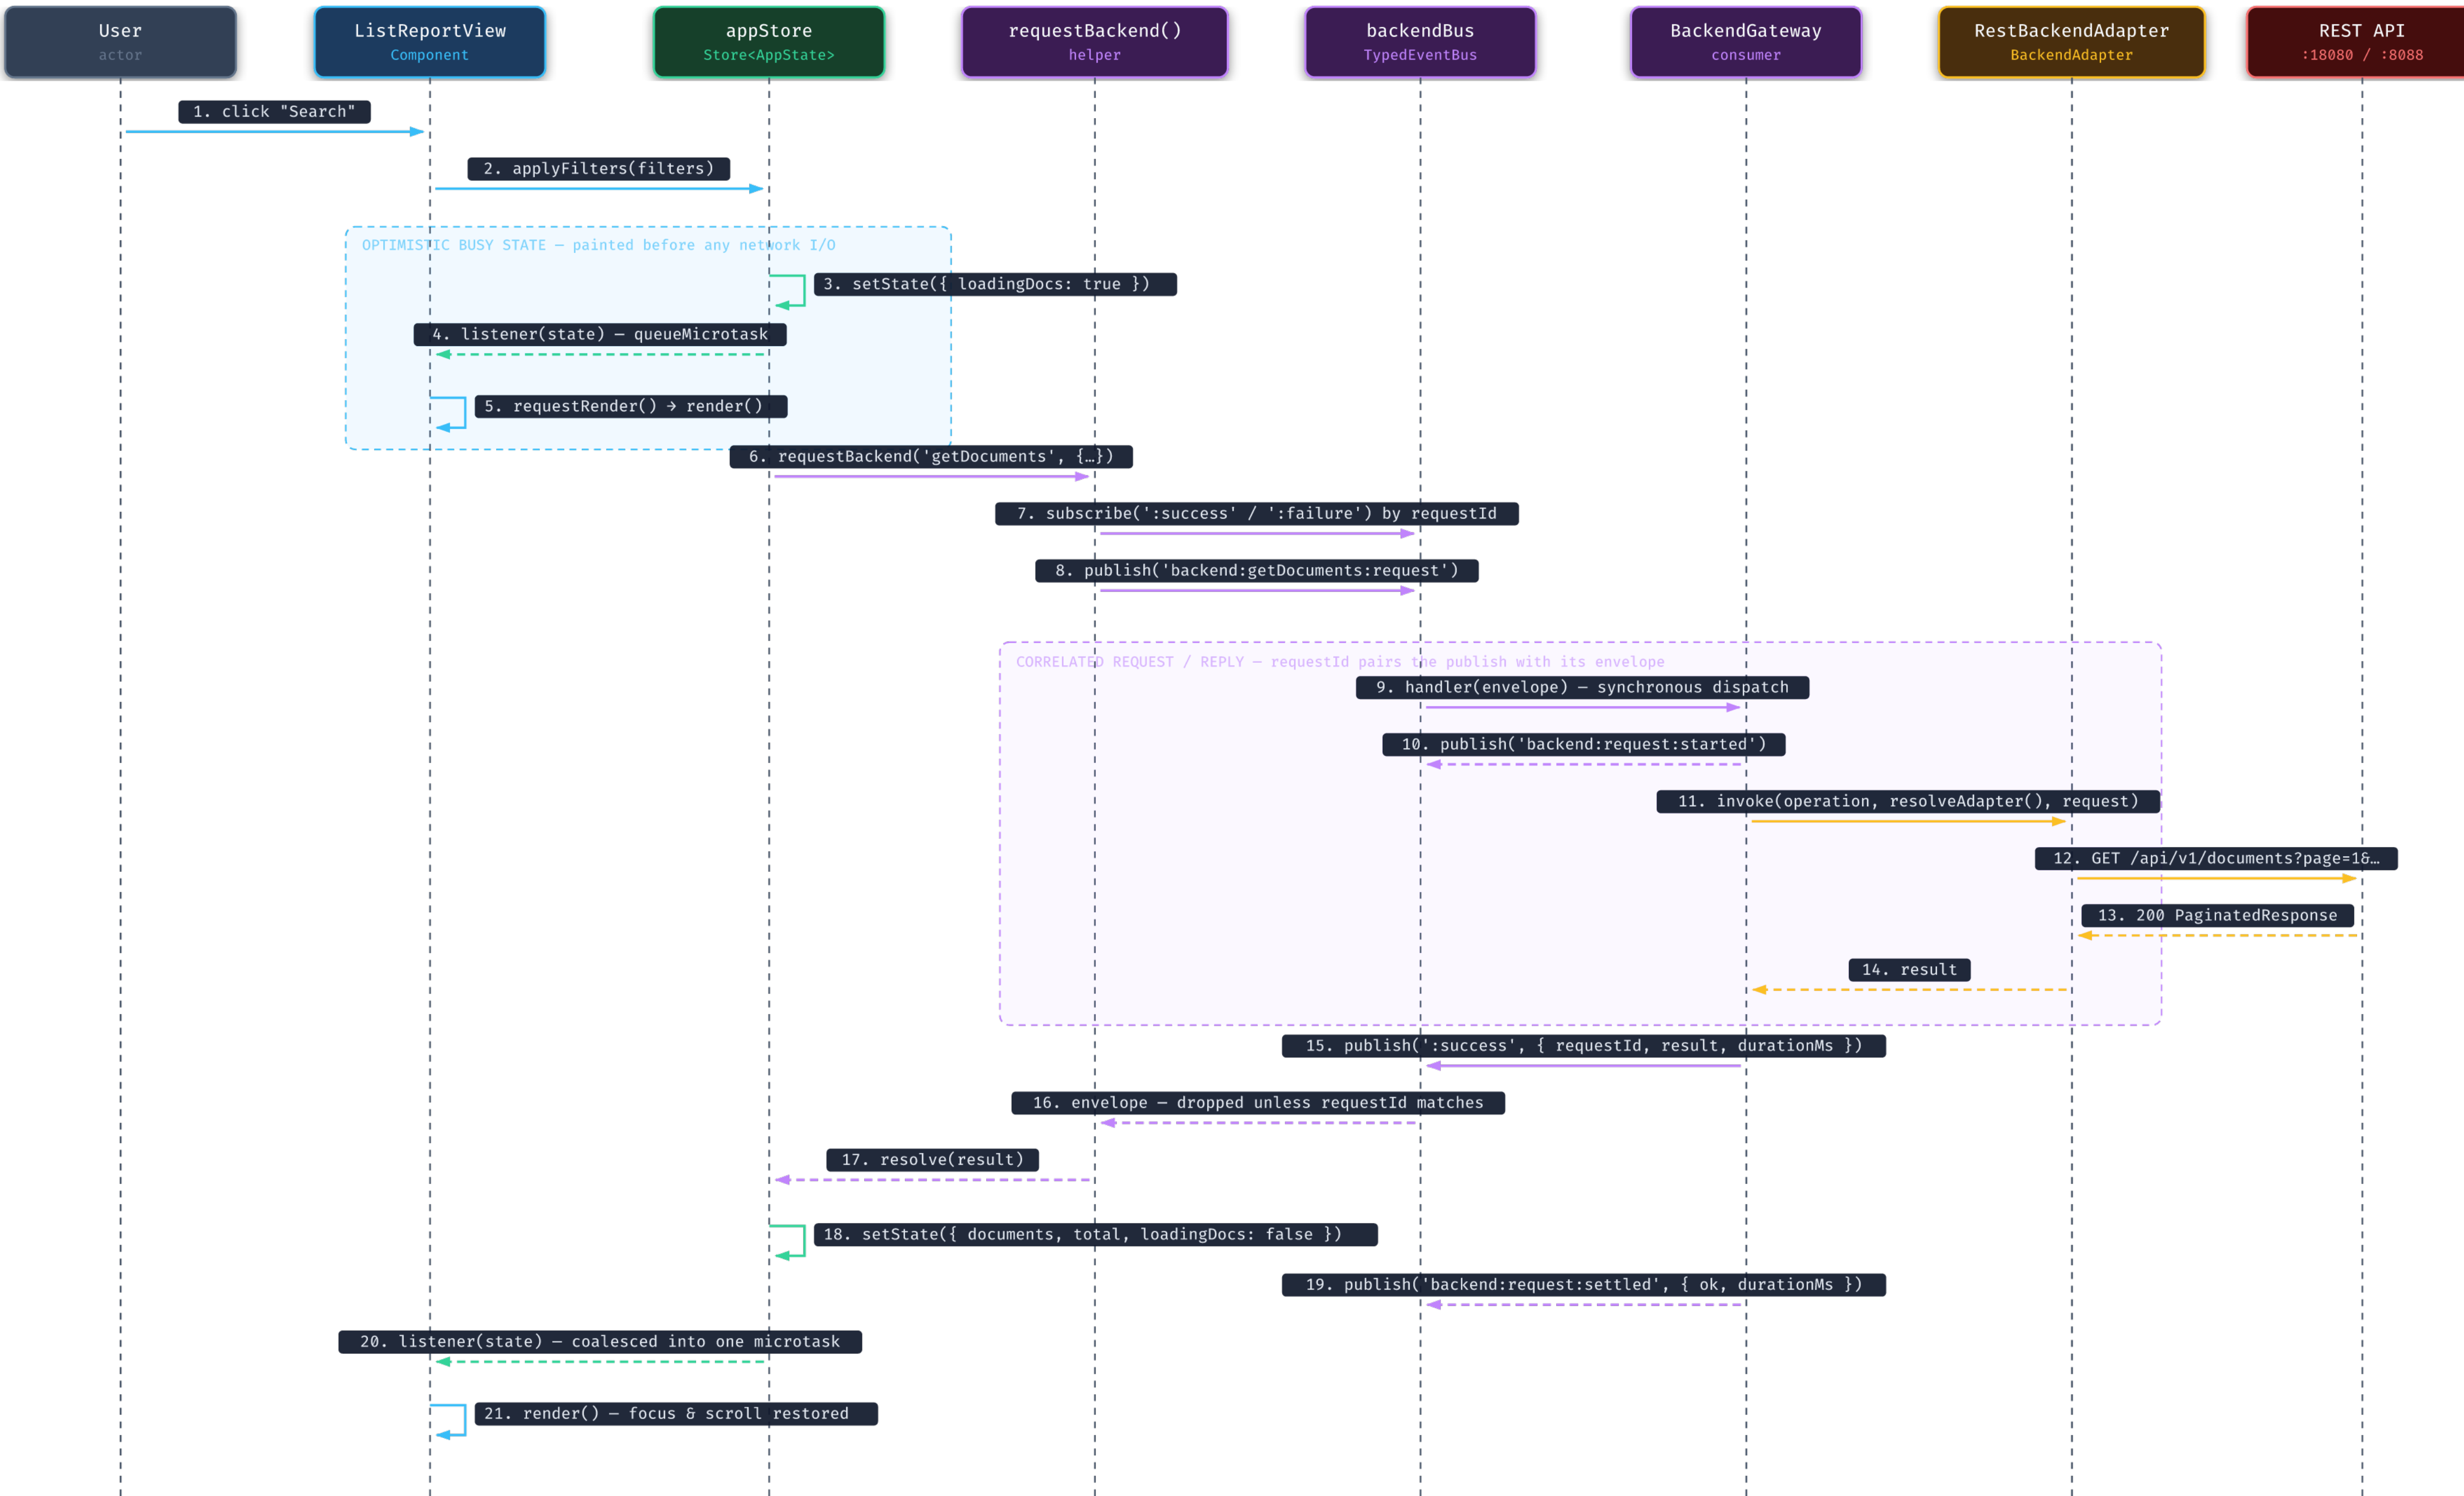

WHY IT IS BUILT THIS WAY

The view never awaits the adapter – it only reacts to store state. Mock and REST adapters are therefore swappable at runtime.

FAILURE PATH

The adapter throwing publishes `':failure'` instead, so `requestBackend()` rejects and the store lands on `setState({ fetchError, loadingDocs: false })`.

LEGEND

— view call — state change — event bus — network
--- asynchronous / reply