

SingleObjectMixin
get_context_data (s elf, **kwargs) get_context_object_name (s elf, obj) get_object (s elf, querys et=None) get_queryset (s elf) get_slug_field (s elf)
context_object_name = None model = None queryset = None slug_field = 'slug'

View
as_view (cls , **initkwargs) dispatch (s elf, request, *args , **kwargs) http_method_not_allowed (s elf, request, *args , **kwargs)
http_method_names = ['get', 'post', 'put', 'delete', 'head', 'options', 'trace']

YearMixin
get_year (s elf) get_year_format (s elf)
year = None year_format = '% Y'

MonthMixin
get_month (s elf) get_month_format (s elf) get_next_month (s elf, date) get_previous_month (s elf, date)
month = None month_format = '% b'

DayMixin
get_day (s elf) get_day_format (s elf) get_next_day (s elf, date) get_previous_day (s elf, date)
day = None day_format = '% d'

DateMixin
get_allow_future (s elf) get_date_field (s elf)
allow_future = False date_field = None


BaseDetailView
get (s elf, request, **kwargs)


TemplateResponseMixin
get_template_names (s elf) render_to_response (s elf, context, **response_kwargs)
response_class = TemplateResponse template_name = None

BaseDateDetailView
get_object (s elf, queryset=None)

SingleObjectTemplateResponseMixin
get_template_names (s elf)
template_name_field = None template_name_suffix = '_detail'

DateDetailView
template_name_suffix = '_detail'

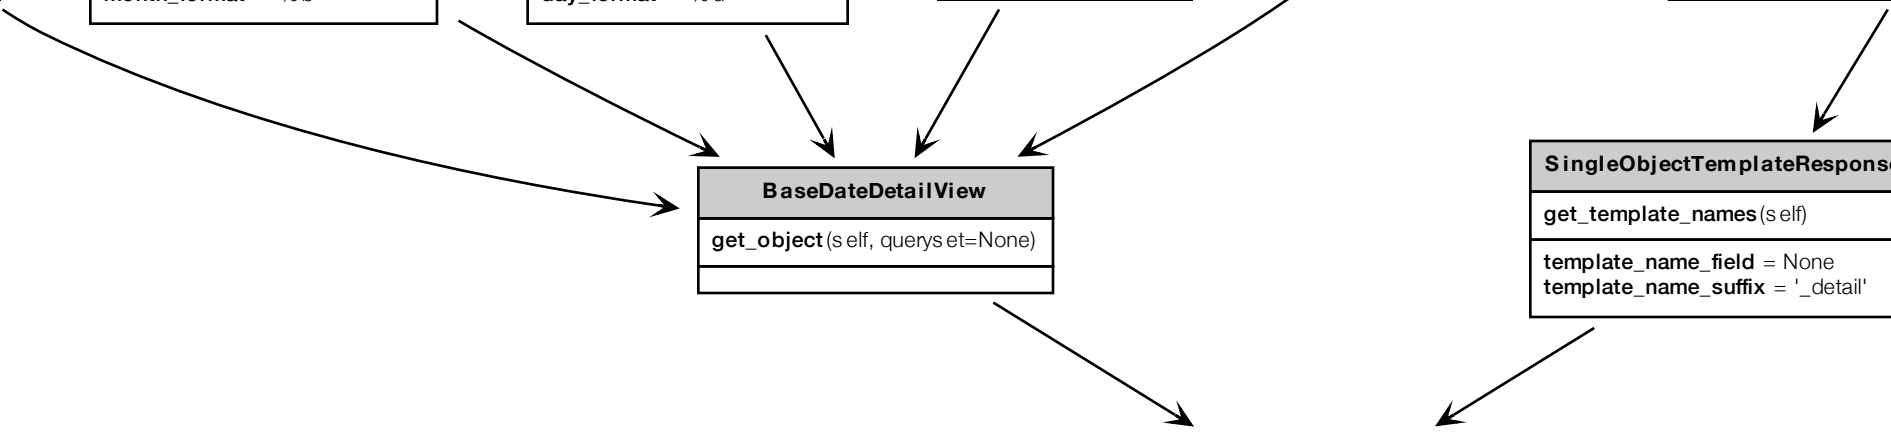

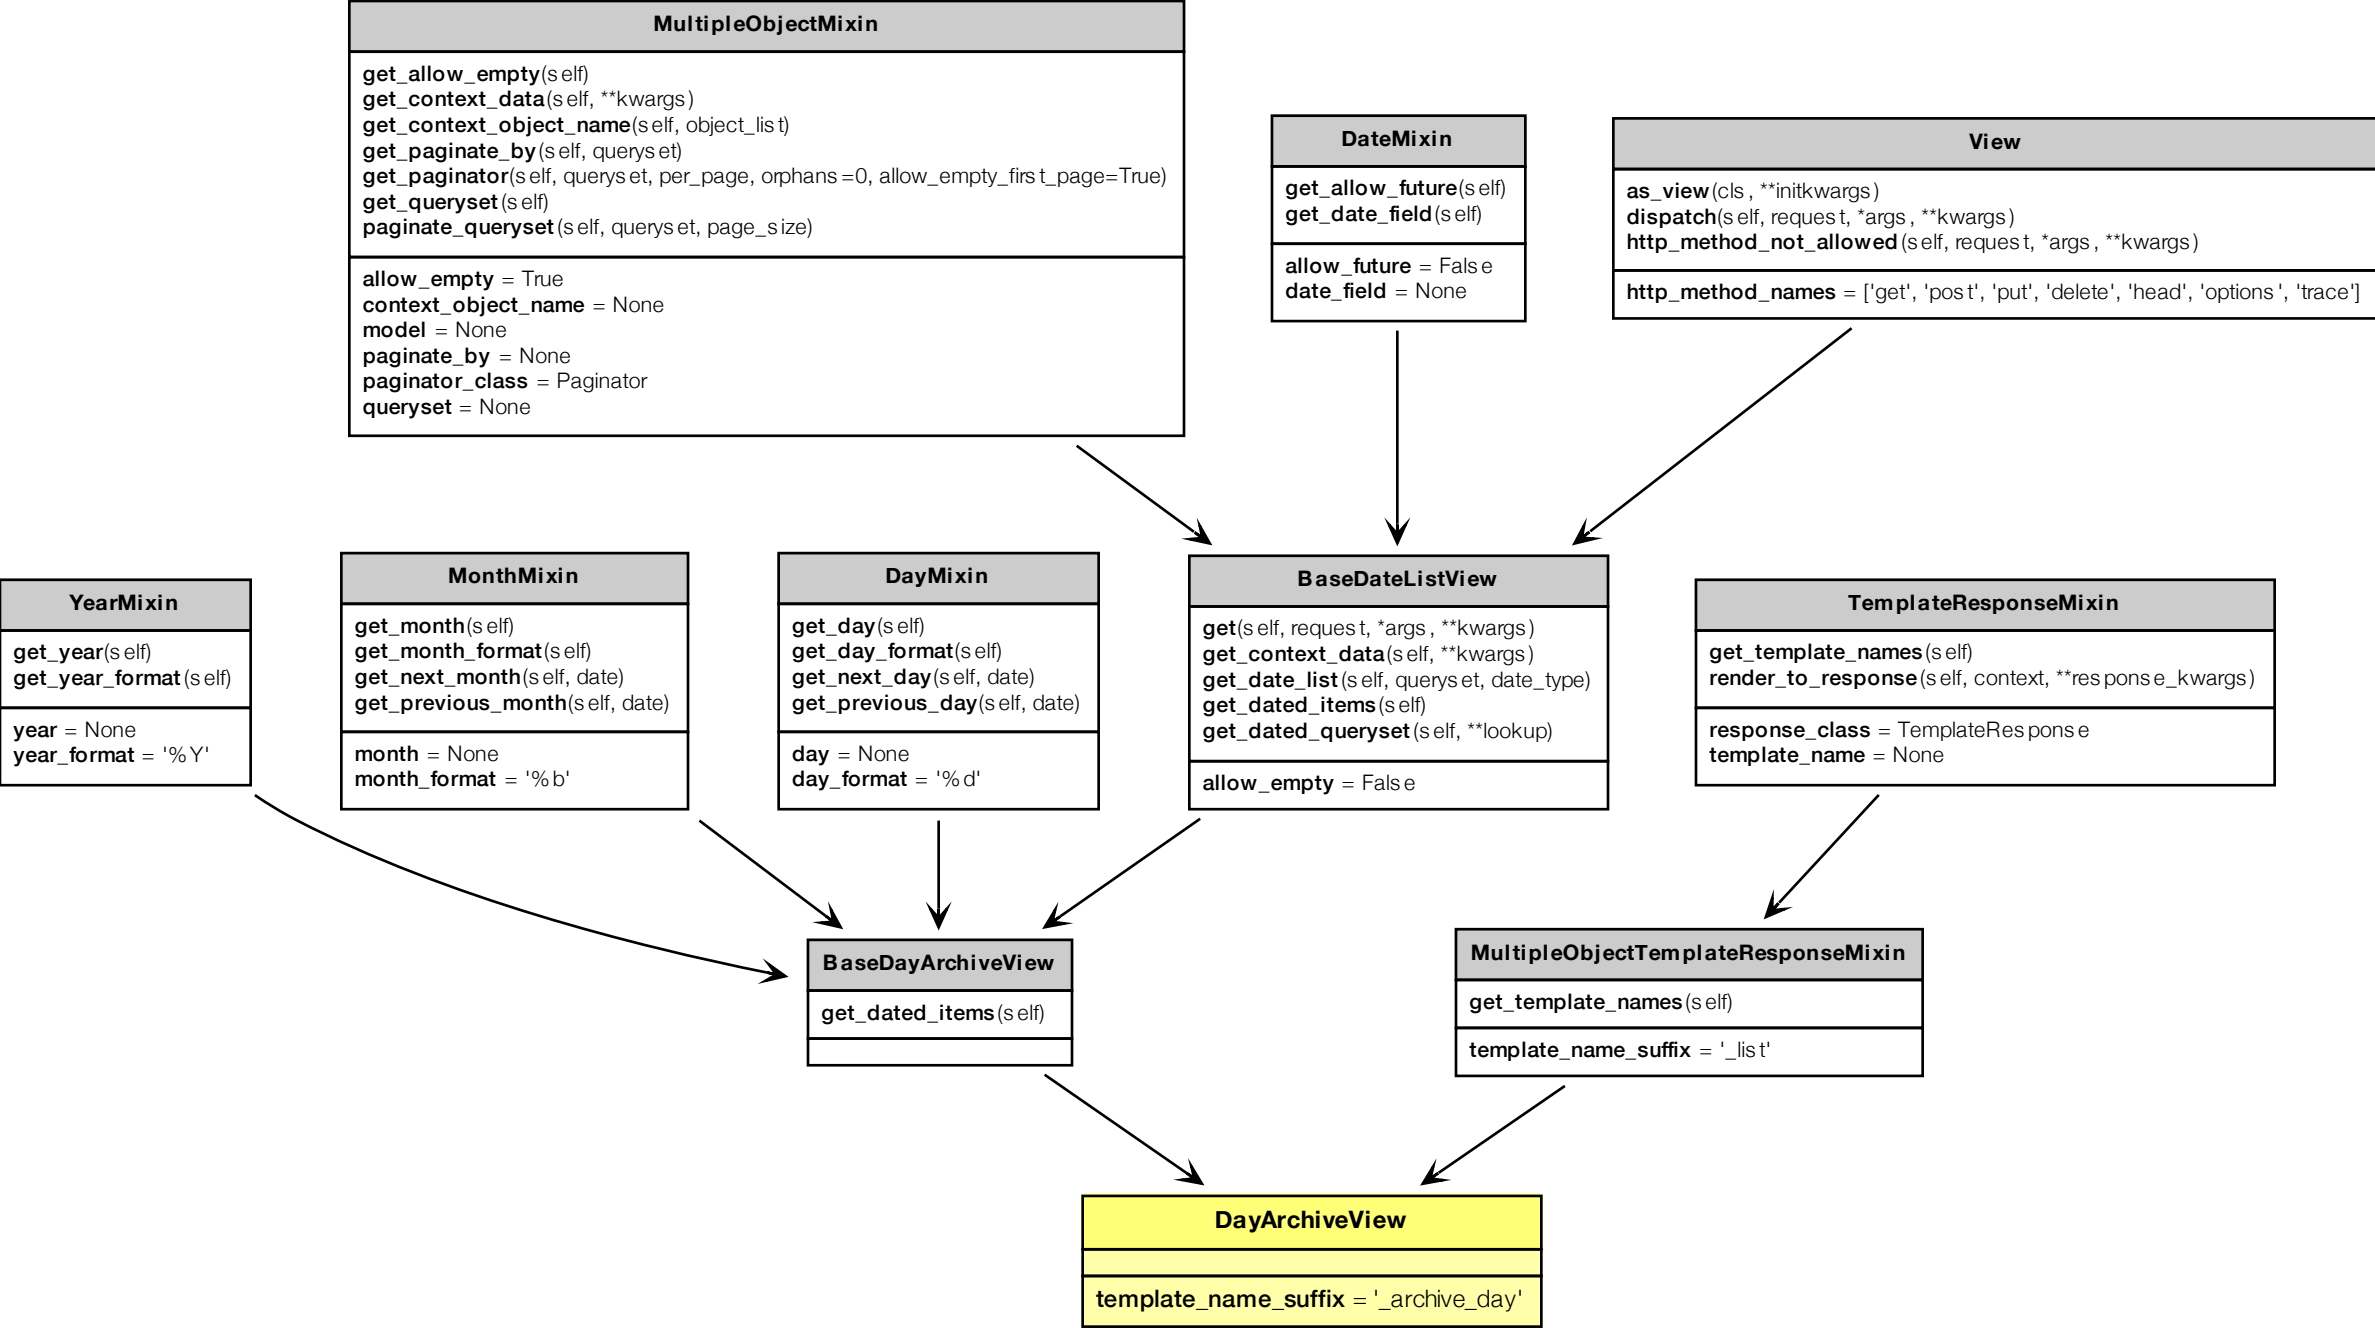

SingleObjectMixin
get_context_data (self, **kwargs) get_context_object_name (self, obj) get_object (self, queryset=None) get_queryset (self) get_slug_field (self)
context_object_name = None model = None queryset = None slug_field = 'slug'

View
as_view (cls, **initkwargs) dispatch (self, request, *args, **kwargs) http_method_not_allowed (self, request, *args, **kwargs)
http_method_names = ['get', 'post', 'put', 'delete', 'head', 'options', 'trace']

DeletionMixin
delete (self, request, *args, **kwargs) get_success_url (self) post (self, *args, **kwargs)
success_url = None


BaseDetailView
get (self, request, **kwargs)


TemplateResponseMixin
get_template_names (self) render_to_response (self, context, **response_kwargs)
response_class = TemplateResponse template_name = None


BaseDeleteView

SingleObjectTemplateResponseMixin
get_template_names (self)
template_name_field = None template_name_suffix = '_detail'

DeleteView
template_name_suffix = '_confirm_delete'

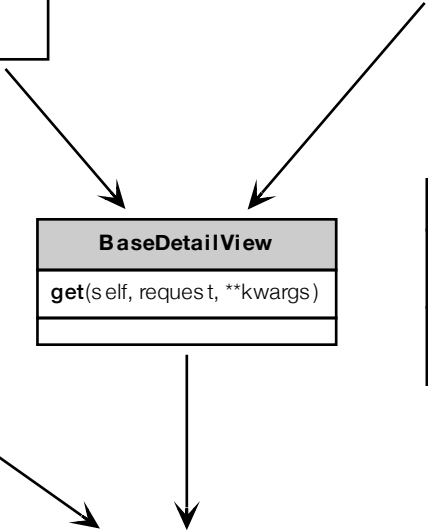

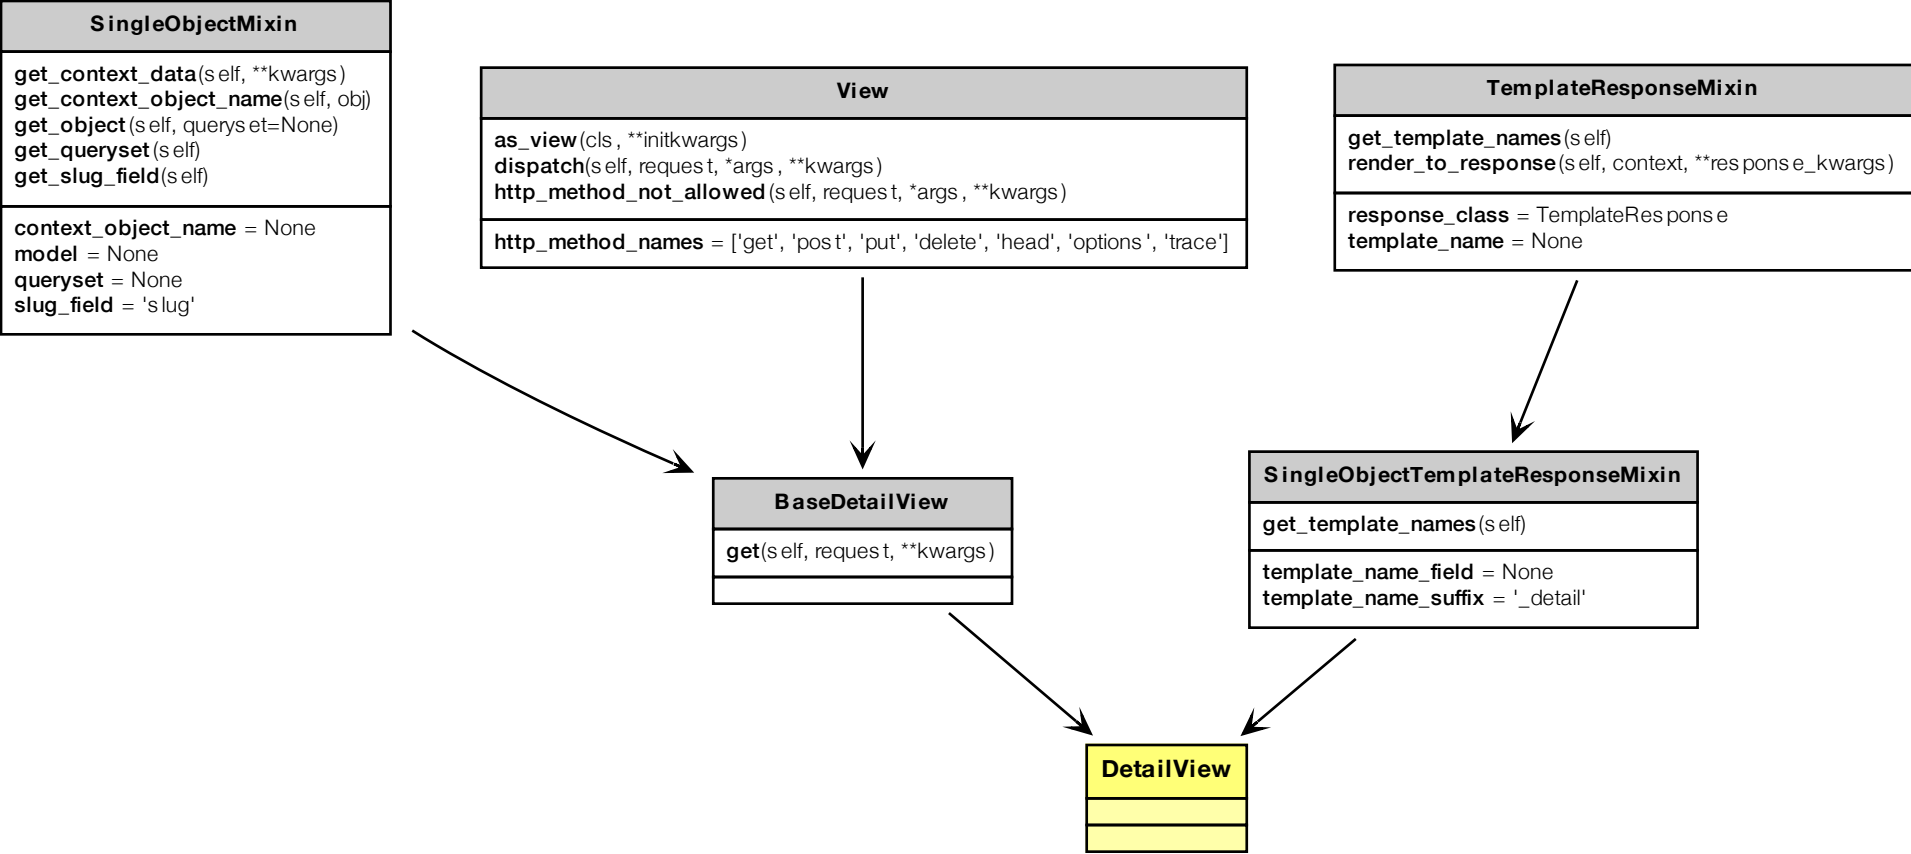


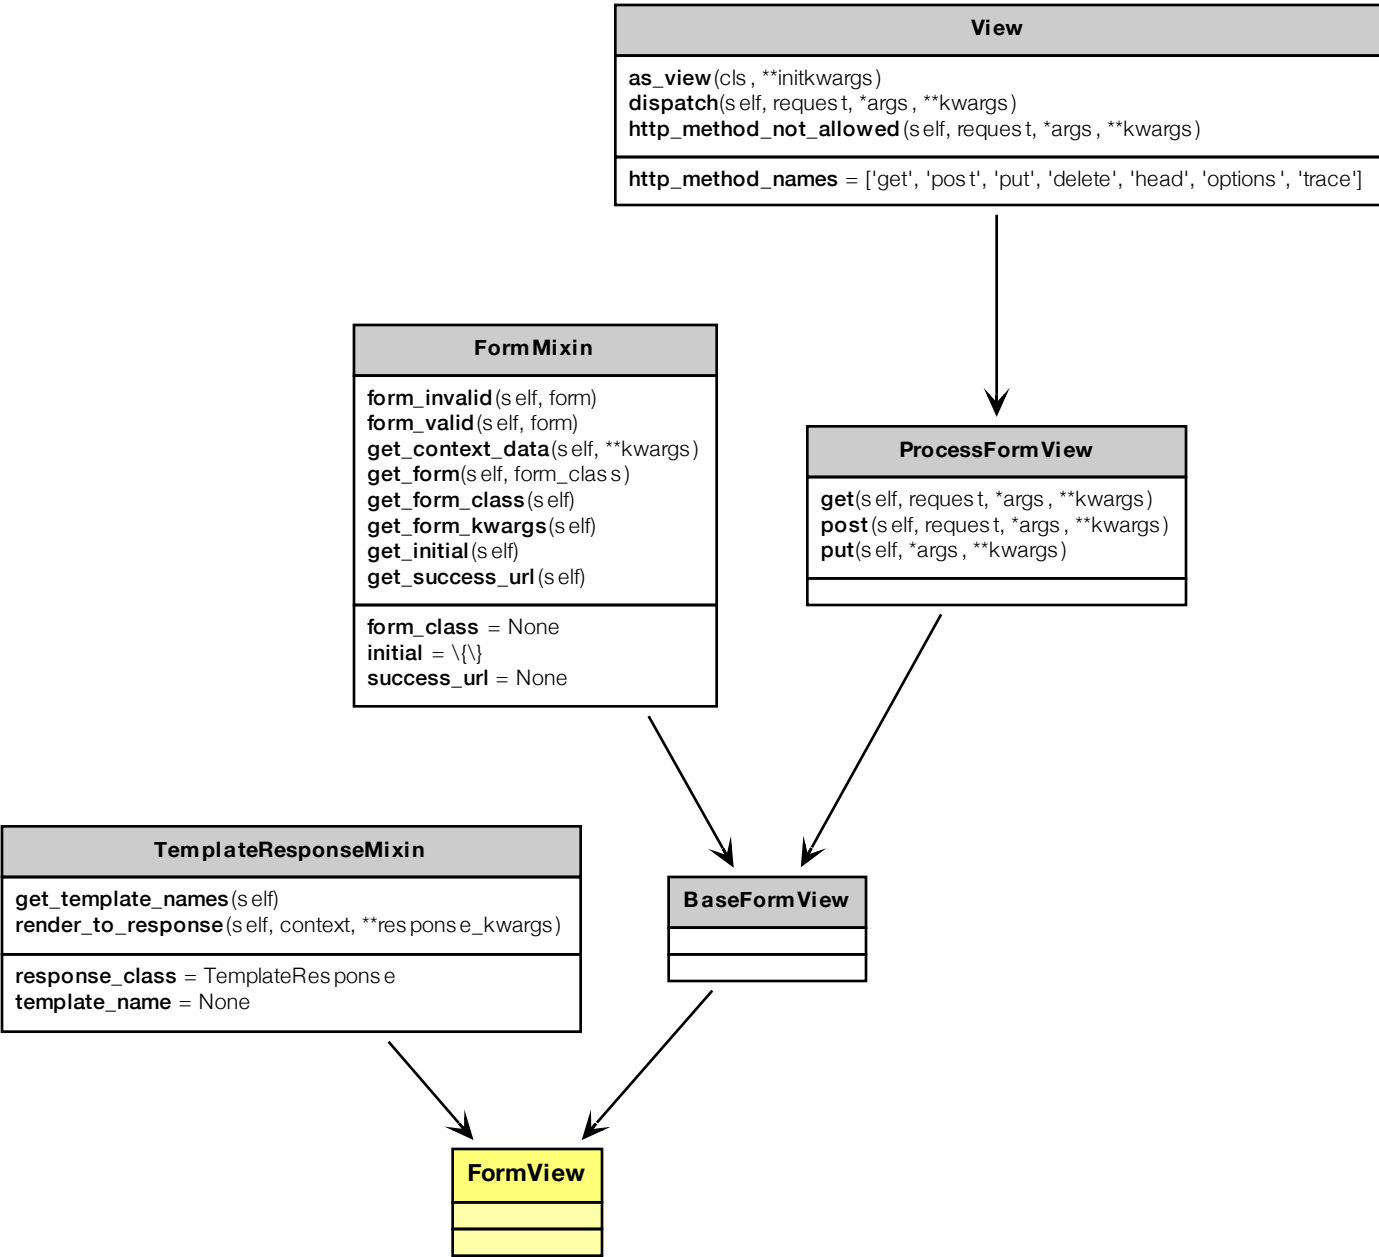


MultipleObjectMixin
<code>get_allow_empty(self)</code> <code>get_context_data(self, **kwargs)</code> <code>get_context_object_name(self, object_list)</code> <code>get_paginate_by(self, queryset)</code> <code>get_paginator(self, queryset, per_page, orphans=0, allow_empty_first_page=True)</code> <code>get_queryset(self)</code> <code>paginate_queryset(self, queryset, page_size)</code>
<code>allow_empty = True</code> <code>context_object_name = None</code> <code>model = None</code> <code>paginate_by = None</code> <code>paginator_class = Paginator</code> <code>queryset = None</code>

View
<code>as_view(cls, **initkwargs)</code> <code>dispatch(self, request, *args, **kwargs)</code> <code>http_method_not_allowed(self, request, *args, **kwargs)</code>
<code>http_method_names = ['get', 'post', 'put', 'delete', 'head', 'options', 'trace']</code>

TemplateResponseMixin
<code>get_template_names(self)</code> <code>render_to_response(self, context, **response_kwargs)</code>
<code>response_class = TemplateResponse</code> <code>template_name = None</code>

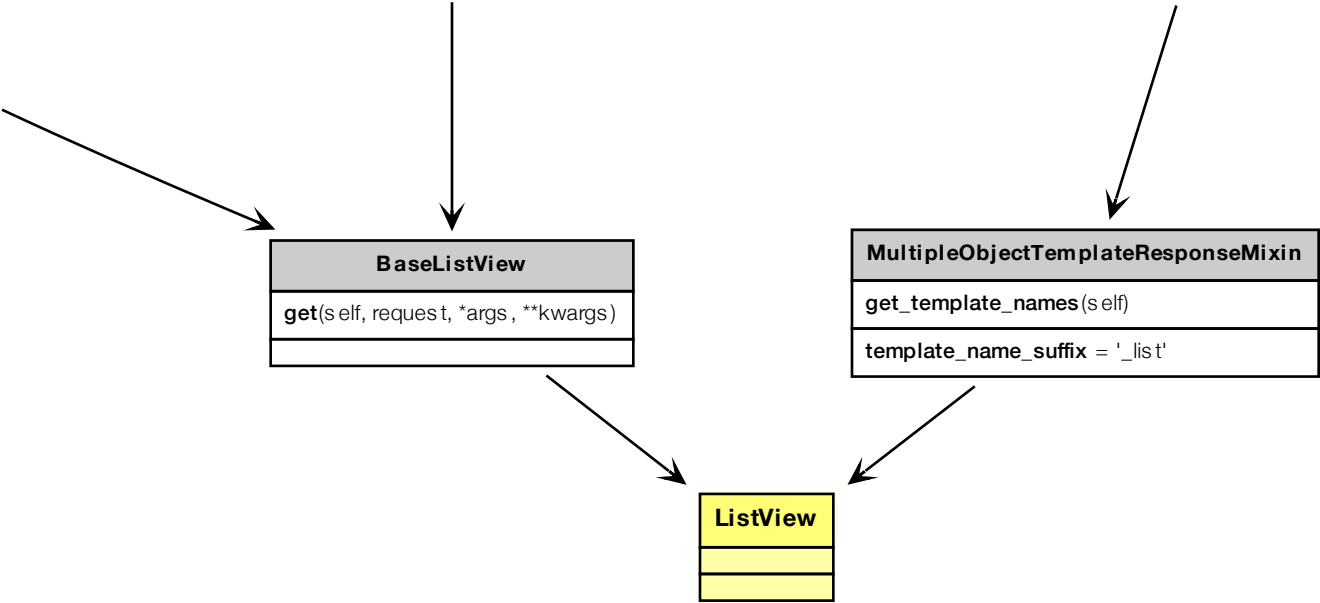

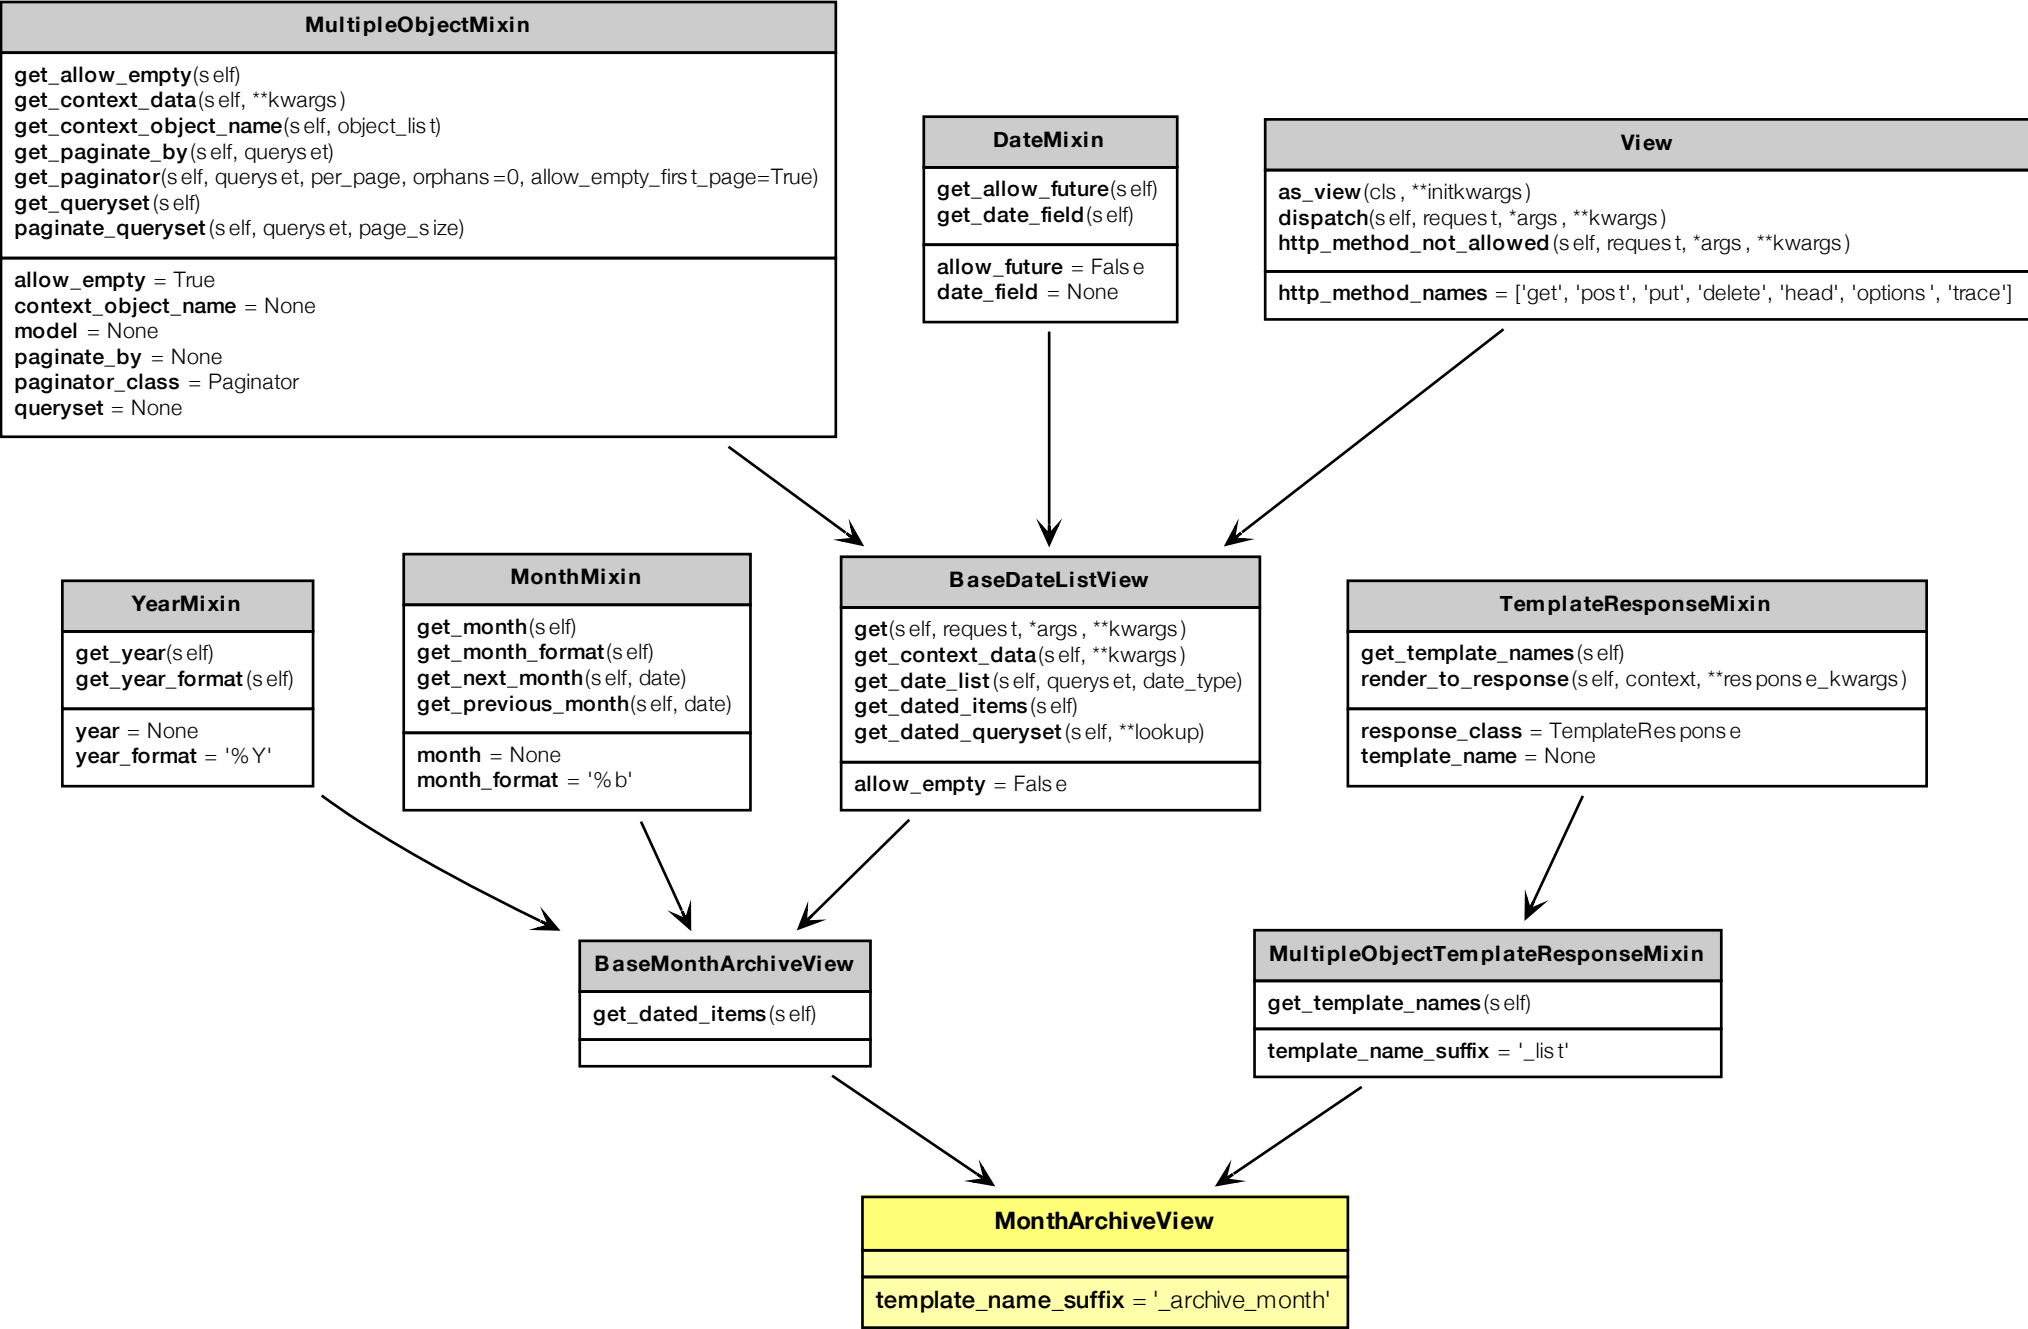

View
as_view (cls, **initkwargs) dispatch (self, request, *args, **kwargs) http_method_not_allowed (self, request, *args, **kwargs)
http_method_names = ['get', 'post', 'put', 'delete', 'head', 'options', 'trace']



RedirectView
get (self, request, *args, **kwargs) get_redirect_url (self, **kwargs)
permanent = True query_string = False url = None

TemplateResponseMixin
get_template_names (self) render_to_response (self, context, **response_kwargs)
response_class = TemplateResponse template_name = None

View
as_view (cls, **kwargs) dispatch (self, request, *args, **kwargs) http_method_not_allowed (self, request, *args, **kwargs)
http_method_names = ['get', 'post', 'put', 'delete', 'head', 'options', 'trace']

