
A Bitmapper's Companion

epilys

2021

an introduction
to basic bitmap
mathematics
and algorithms
with code
samples in **Rust**



Table Of Contents	4	toc
Introduction	8	intro
Points And Lines	18	lines
Points and Line Segments	40	segments
Points, Lines and Circles	47	circles
Points, Lines and Shapes	55	shapes
Curves other than circles	64	curves
Vectors, matrices and transformations	73	trans- forma- tions
Addendum	88	adden- dum



Manos Pitsidianakis (epilys)

<https://nessuent.xyz>

<https://github.com/epilys>

epilys@nessuent.xyz

All non-screenshot figures were generated by hand in Inkscape unless otherwise stated.

The skull in the cover is a transformed bitmap of the skull in the 1533 oil painting by Hans Holbein the Younger, *The Ambassadors*, which features a floating distorted skull rendered in anamorphic perspective.

A Bitmapper's Companion, 2021

Special Topics ► Computer Graphics ► Programming

006.6'6-dc20

Copyright © 2021 by Emmanouil Pitsidianakis

This work is licensed under the Creative Commons Attribution-NonCommercial-ShareAlike 3.0 Unported License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-nc-sa/3.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.


The source code for this work is available under the GNU GENERAL PUBLIC LICENSE version 3 or later. You can view it, study it, modify it for your purposes as long as you respect the license if you choose to distribute your modifications.

The source code is available here

<https://github.com/epilys/bitmappers-companion>

Contents

I	Introduction	9
1	Data representation	10
2	Displaying pixels to your screen	12
3	Bits to byte pixels	14
4	Loading graphics files in Rust	15
5	Including xbm files in Rust	16
II	Points And Lines	19
6	Distance between two points	20
7	Moving a point to a distance at an angle	21
8	Equations of a line	22
8.1	Line through a point $P = (x_p, y_p)$ and a slope m	22
8.2	Line through two points	23
9	Drawing a line	25
10	Distance from a point to a line	26
10.1	Using the implicit equation form	26
10.2	Using an L defined by two points P_1, P_2	27
10.3	Using an L defined by a point P_l and angle $\hat{\theta}$	27
11	Perpendicular lines	28
11.1	Find perpendicular to line that passes through given point	28
11.2	Find point in line that belongs to the perpendicular of given point	28

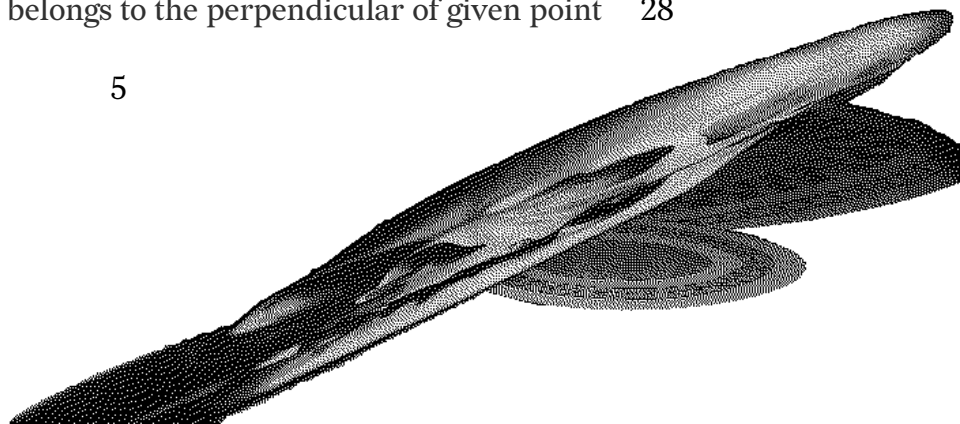

12	Angle between two lines	30
13	Intersection of two lines	32
14	Line equidistant from two points	34
15	Reflection of point on line	36
16	Normal to a line through a point	38
17	Angle sectioning	39
17.1	Bisection	39
17.2	Trisection	39
III	Points And Line Segments	41
18	Drawing a line segment from its two endpoints	42
19	Drawing line segments with width	44
20	Intersection of two line segments	46
20.1	<i>Fast</i> intersection of two line segments	46
IV	Points, Lines and Circles	48
21	Equations of a circle	50
22	Bounding circle	51
V	Points, Lines and Shapes	56
23	Rectangles and parallelograms	57
23.1	From a center point	57
23.2	From a corner point	57
24	Triangles	58
24.1	Making a triangle from a point and given angles	58
25	Union, intersection and difference of polygons	59
26	Centroid of polygon	60
27	Polygon clipping	61
28	Triangle filling	62

29	Flood filling	64
VI	Curves other than circles	65
30	Parametric elliptical arcs	66
31	Bézier curves	68
31.1	Quadratic Bézier curves	69
31.1.1	Drawing the quadratic	69
31.2	Cubic Bézier curves	73
31.3	Weighted Béziers	73
VII	Vectors, matrices and transformations	74
32	Rotation of a bitmap	75
32.1	Fast 2D Rotation	79
33	90° Rotation of a bitmap by parallel recursive subdivision	80
34	Magnification/Scaling	81
34.1	Smoothing enlarged bitmaps	82
34.2	Stretching lines of bitmaps	82
35	Mirroring	84
36	Shearing	85
36.1	The relationship between shearing factor and angle	87
37	Projections	88
VIII	Addendum	89
38	Faster drawing a line segment from its two endpoints using symmetry	90
39	Joining the ends of two wide line segments together	91
40	Composing monochrome bitmaps with separate alpha channel data	92
41	Orthogonal connection of two points	93
42	Join segments with round corners	94
43	Squircle	98

44	Faster line clipping	101
45	Archimedean spiral	102
46	Tilings	104
46.1	Truchet Tiling	105
46.2	Pythagorean Tiling	107
46.3	Hexagon tiling	109
47	Space-filling Curves	110
47.1	Hilbert curve	111
47.2	Sierpiński curve	113
47.3	Peano curve	113
47.4	Z-order curve	114
47.5	Flowsnake curve	117
48	Dithering	119
48.1	Floyd-Steinberg	120
48.2	Atkinson dithering	122
49	Marching squares	124
	Index	125



Part I

Introduction

Chapter 1

Data representation

The data structures we're going to use is *Point* and *Image*. *Image* represents a bitmap, although we will use full RGB colors for our points therefore the size of a pixel in memory will be u8 instead of 1 bit.

We will work on the cartesian grid representing the framebuffer that will show us the pixels. The *origin* of this grid (i.e. the center) is at $(0, 0)$.



We will represent points as pairs of signed integers. When actually drawing them though, negative values and values outside the window's geometry will be

ignored (clipped).

src/lib.rs:



This code file is a PDF attachment

```
pub type Point = (i64, i64);

pub const fn from_u8_rgb(r: u8, g: u8, b: u8) -> u32 {
    let (r, g, b) = (r as u32, g as u32, b as u32);
    (r << 16) | (g << 8) | b
}

pub const AZURE_BLUE: u32 = from_u8_rgb(0, 127, 255);
pub const RED: u32 = from_u8_rgb(157, 37, 10);
pub const WHITE: u32 = from_u8_rgb(255, 255, 255);
pub const BLACK: u32 = 0;

pub struct Image {
    pub bytes: Vec<u32>,
    pub width: usize,
    pub height: usize,
    pub x_offset: usize,
    pub y_offset: usize,
}

impl Image {
    pub fn new(width: usize, height: usize, x_offset: usize, y_offset: usize) -> Self;
    pub fn magick_open(path: &str, x_offset: usize, y_offset: usize) -> Result<Self,
↳ Box<dyn Error>>;
    pub fn from_xbm(path: &str, x_offset: usize, y_offset: usize) -> Result<Self, Box<dyn
↳ Error>>;
    pub fn draw(&self, buffer: &mut Vec<u32>, fg: u32, bg: Option<u32>, window_width:
↳ usize);
    pub fn draw_outline(&mut self);
    pub fn clear(&mut self);
    pub fn plot(&mut self, x: i64, y: i64);
    pub fn get(&mut self, x: i64, y: i64) -> u32;
    pub fn plot_ellipse(
        &mut self,
        (xm, ym): (i64, i64),
        (a, b): (i64, i64),
        quadrants: [bool; 4],
        _wd: f64,
    );
    pub fn plot_line_width(&mut self, point_a: Point, point_b: Point, wd: f64);
    pub fn flood_fill(&mut self, mut x: i64, y: i64);
}
```

An RGB color with coordinates (r, g, b) where r, g, b : u8 values is represented as a u32 number with the red component shifted 16 bits to the left, the green component 8 bits, and the final 8 bits are the blue component. It's essentially laying the r, g, b values sequentially and forming a 32 bit value out of three 8 bit values.

Our `Image::plot(x, y)` function sets the (x, y) pixel to black. To do that we set the element `y * width + x` of the Image's buffer to the black color as RGB.

intro

Chapter 2

Displaying pixels to your screen

A way to display an *Image* is to use the `minifb` crate which allows you to create a window and draw pixels directly on it. Here's how you could set it up:

src/bin/introduction.rs:



This code file is a PDF attachment

```
use bitmappers_companion::*;
use minifb::{Key, Window, WindowOptions};

const WINDOW_WIDTH: usize = 400;
const WINDOW_HEIGHT: usize = 400;

fn main() {
    let mut buffer: Vec<u32> = vec![WHITE; WINDOW_WIDTH * WINDOW_HEIGHT];
    let mut window = Window::new(
        "Test - ESC to exit",
        WINDOW_WIDTH,
        WINDOW_HEIGHT,
        WindowOptions {
            title: true,
            //borderless: true,
            //resize: false,
            //transparency: true,
            ..WindowOptions::default()
        },
    )
    .unwrap();


    // Limit to max ~60 fps update rate
    window.limit_update_rate(Some(std::time::Duration::from_micros(16600)));

    let mut image = Image::new(50, 50, 150, 150);
    image.draw_outline();
    image.draw(&mut buffer, BLACK, None, WINDOW_WIDTH);

    while window.is_open()
        && !window.is_key_down(Key::Escape)
        && !window.is_key_down(Key::Q) {
        window
            .update_with_buffer(&buffer, WINDOW_WIDTH, WINDOW_HEIGHT)
            .unwrap();

        let millis = std::time::Duration::from_millis(100);
        std::thread::sleep(millis);
    }
}
```

Running this will show you something like this:

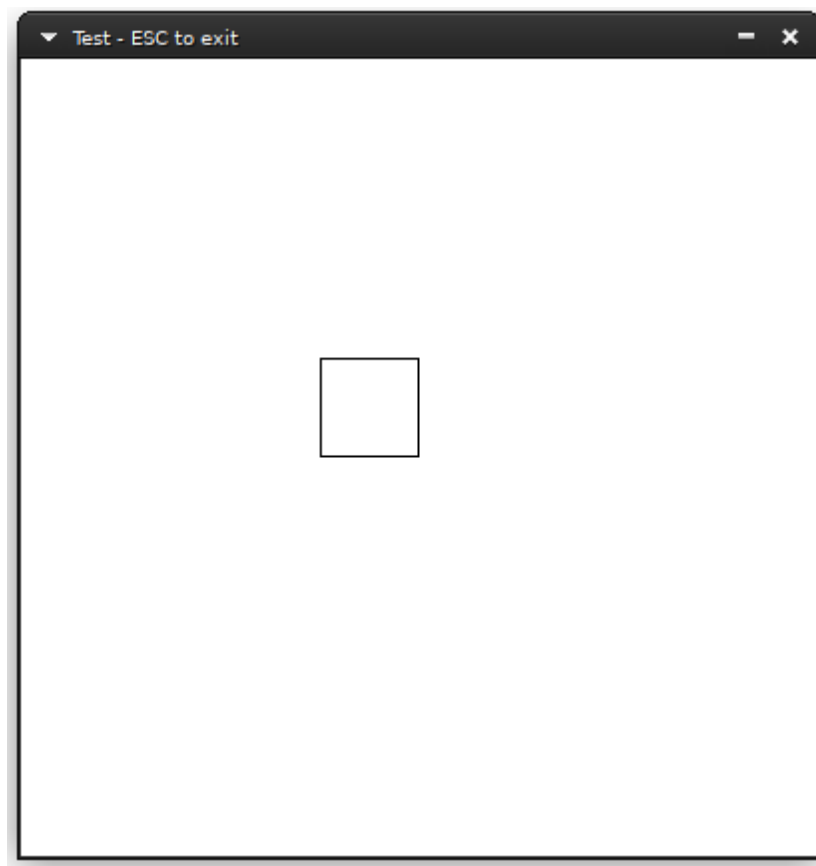

By drawing each individual pixel with the `Image::plot` and `Image::plot_color` functions, we can draw any possible RGB picture of the buffer size. In this book's chapters, we will usually calculate pixels by using discrete calculations of each pixels as integers, or by using rational values (with 64 bit floating point representation) and then calculating their integer values with the `floor` function. This can also be done by casting an `f64` type to `i64` with as:

```
let val: f64 = 5.5;  
let val: i64 = val as i64;  
assert_eq!(5i64, val);
```

Chapter 3

Bits to byte pixels

If we worked with 1 bit images (black and white) it could be a more space-efficient representation to store the pixels as bits: 8 pixels in 1 byte. For this book we accept that our images can have RGB colors. The xbm format stores pixels like that, and we might wish to convert them to our representation.

Let's define a way to convert bit information to a byte vector:

```
pub fn bits_to_bytes(bits: &[u8], width: usize) -> Vec<u32> {  
    let mut ret = Vec::with_capacity(bits.len() * 8);  
    let mut current_row_count = 0;  
    for byte in bits {  
        for n in 0..8 {  
            if byte.rotate_right(n) & 0x01 > 0 {  
                ret.push(BLACK);  
            } else {  
                ret.push(WHITE);  
            }  
            current_row_count += 1;  
            if current_row_count == width {  
                current_row_count = 0;  
                break;  
            }  
        }  
    }  
    ret  
}
```

Chapter 4

Loading graphics files in Rust

The book's library includes a method to load xbm files on runtime (see *Including xbm files in **Rust*** for including them in your binary at compile time). If your system has ImageMagick installed and the commands `identify` and `magick` are in your `PATH` environment variable, you can use the `Image::magick_open` method:

```
impl Image {  
    ...  
    pub fn magick_open(path: &str, x_offset: usize, y_offset: usize) -> Result<Self,  
↪   Box<dyn Error>>;  
    ...  
}
```

It simply converts the image file you pass to it to raw bytes using the invocation `magick convert path RGB:-` which prints raw RGB content to `stdout`.

If you have another way to load pictures such as your own code or a picture format library crate, all you have to do is convert the pixel information to an `Image` whose definition we repeat here:

```
pub struct Image {  
    pub bytes: Vec<u32>,  
    pub width: usize,  
    pub height: usize,  
    pub x_offset: usize,  
    pub y_offset: usize,  
}
```

Chapter 5

Including xbm files in Rust

*The end of this chapter includes a short **Rust** program to automatically convert **xbm** files to equivalent **Rust** code.*

xbm files are C source code files that contain the pixel information for an image as macro definitions for the dimensions and a static char array for the pixels, with each bit column representing a pixel. If the width dimension doesn't have 8 as a factor, the remaining bit columns are left blank/ignored.

They used to be a popular way to share user avatars in the old internet and are also good material for us to work with, since they are small and numerous. The following is such an image:



Then, we can convert the xbm file from C to **Rust** with the following transformations:

```
#define news_width 48  
#define news_height 48  
static char news_bits[] = {
```

to

```
const NEWS_WIDTH: usize = 48;  
const NEWS_HEIGHT: usize = 48;  
const NEWS_BITS: &[u8] = &[
```

And replace the closing `}` with `]`.


We can then include the new file in our source code:


```
include!("news.xbm.rs");
```

load the image:

```
let mut image = Image::new(NEWS_WIDTH, NEWS_HEIGHT, 25, 25);  
image.bytes = bits_to_bytes(NEWS_BITS, NEWS_WIDTH);
```

and finally run it:

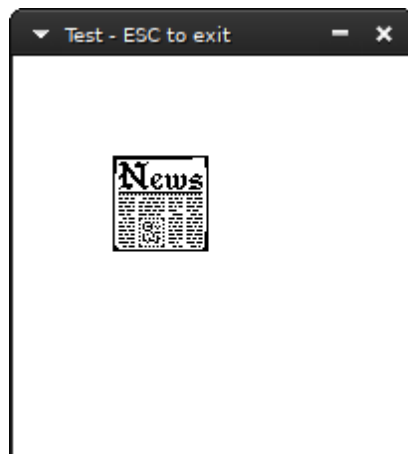

intro

The following short program uses the regex crate to match on these simple rules and print the equivalent code in stdout. You can use it like so:

```
cargo run --bin xbmtools -- file.xbm > file.xbm.rs
```

```
use regex;  
use regex::Regex;  
use std::fs::File;  
use std::io::prelude::*;  
  
fn main() {  
    let args = std::env::args().skip(1).collect::<Vec<String>>();  
    if args.len() != 1 {  
        println!("one argument expected, the xbm file path to convert.");  
        return;  
    }  
    let mut file = match File::open(&args[0]) {  
        Err(err) => panic!("couldn't open {}: {}", args[0], err),  
        Ok(file) => file,  
    };  
  
    let mut s = String::new();  
    if let Err(err) = file.read_to_string(&mut s) {  
        panic!("couldn't read {}: {}", args[0], err);  
    }  
  
    let re = Regex::new(  
        r"(?imax)  
        ^\s*\x23\s*define\s+(?P<i>.+?)_width\s+(?P<w>\d\d*)$  
    )".unwrap().unwrap();  
}
```

src/bin/xbmtors.rs:



This code file is a PDF attachment

```

    \|s*
    ^\|s*\x23\|s*define\|s+.+?_height\|s+(?P<h>\d\d*)$
    \|s*
    ^\|s*static(\|s+unsigned){0,1}\|s+char\|s+.+?_bits.. \|s*=\|s*\{(?P<b>[~}]+)\};
",
    )
    .unwrap();
    let caps = re
        .captures(&s)
        .expect("Could not convert file, regex doesn't match :(");
    let ident = caps.name("i").unwrap().as_str().to_uppercase();
    let out = re.replace_all(&s, format!("const {i}_WIDTH: usize = $w;\nconst {i}_HEIGHT:
↪  usize = $h;\nconst {i}_BITS: &[u8] = &[$b];", i = &ident));
    println!("{}", out.trim());
}

```

Part II

Points And Lines

Chapter 6

Distance between two points

lines



Given two points, K and L , an elementary application of Pythagoras' Theorem gives the distance between them as

$$r = \sqrt{(x_L - x_K)^2 + (y_L - y_K)^2} \quad (6.1)$$

which is simply coded:

```
pub fn distance_between_two_points(p_k: Point, p_l: Point) -> f64 {  
    let (x_k, y_k) = p_k;  
    let (x_l, y_l) = p_l;  
    let xlk = x_l - x_k;  
    let ylk = y_l - y_k;  
    f64::sqrt((xlk*xlk + ylk*ylk) as f64)  
}
```

Chapter 7

Moving a point to a distance at an angle

lines

Moving a point $P = (x, y)$ at distance d at an angle of r radians is solved with simple trigonometry:

$$P' = (x + d \times \cos r, y + d \times \sin r)$$

Why? The problem is equivalent to calculating the point of a circle with P as the center, d the radius at angle r and as we will later* see this is how the points of a circle are calculated.

```
pub fn move_point(p: Point, d: f64, r: f64) -> Point {  
    let (x, y) = p;  
    (x + (d * f64::cos(r)).round() as i64, y + (d * f64::sin(r)).round() as i64)  
}
```

**Equations of a circle* page 50

Chapter 8

Equations of a line

lines

There are several ways to describe a line mathematically. We'll list the convenient ones for drawing pixels.

The equation that describes every possible line on a two dimensional grid is the *implicit* form $ax + by = c$, $(a, b) \neq (0, 0)$. We can generate equivalent equations by adding the equation to itself, i.e. $ax + by = c \equiv 2ax + 2by = 2c \equiv a'x + b'y = c'$, $a' = 2a, b' = 2b, c' = 2c$ as many times as we want. To "minimize" the constants a, b, c we want to satisfy the relationship $a^2 + b^2 = 1$, and thus can convert the equivalent equations into one representative equation by multiplying the two sides with $\frac{1}{\sqrt{a^2 + b^2}}$; this is called the normalized equation.

The *slope intercept form* describes any line that intercepts the y axis at $b \in \mathbb{R}$ with a specific slope a :


$$y = ax + b$$

The *parametric* form...

8.1 Line through a point $P = (x_p, y_p)$ and a slope m

$$y - y_p = m(x - x_p)$$

8.2 Line through two points

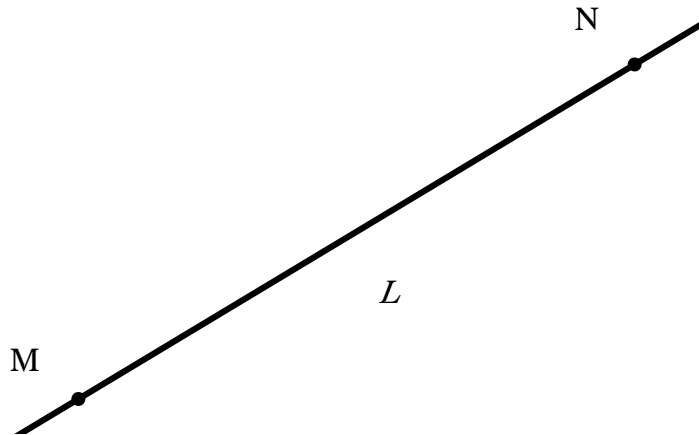

lines

It seems sufficient, given the coordinates of two points M, N , to calculate a, b and c to form a line equation:

$$ax + by + c = 0$$

If the two points are not the same, they necessarily form such a line. To get there, we start from expressing the line as parametric over t : at $t = 0$ it's at point M and at $t = 1$ it's at point N :

$$c = c_M + (c_N - c_M)t, t \in R, c \in \{x, y\}$$

$$c = c_M, t \in R, c \in \{x, y\}$$

Substituting t in one of the equations we get:

$$(y_M - y_N)x + (x_N - x_M)y + (x_M y_N - x_N y_M) = 0$$

Which is what we were after. We should finish by normalising what we found with $\frac{1}{\sqrt{a^2+b^2}}$, but our coordinates are integers and have no decimal or floating point accuracy.

```
fn find_line(point_a: Point, point_b: Point) -> (i64, i64, i64) {  
    let (xa, ya) = point_a;  
    let (xb, yb) = point_b;  
    let a = yb - ya;  
    let b = xa - xb;  
    let c = xb * ya - xa * yb;  
    (a, b, c)  
}
```

lines

Chapter 9

Drawing a line


lines

```
fn plot_line(image: &mut Image, (a, b, c): (i64, i64, i64)) {
    let x = if a != 0 { -1 * (c) / a } else { 0 };
    let mut prev_point = (x, 0);
    for y in 0..(WINDOW_HEIGHT as i64) {
        //  $ax+by+c=0 \Rightarrow$ 
        //  $x=(-c-by)/a$ 
        let x = if a != 0 { -1 * (c + b * y) / a } else { 0 };
        let new_point = (x, y);
        image.plot_line_width(prev_point, new_point, 1.0);
        prev_point = new_point;
    }
}
```

Chapter 10

Distance from a point to a line

lines

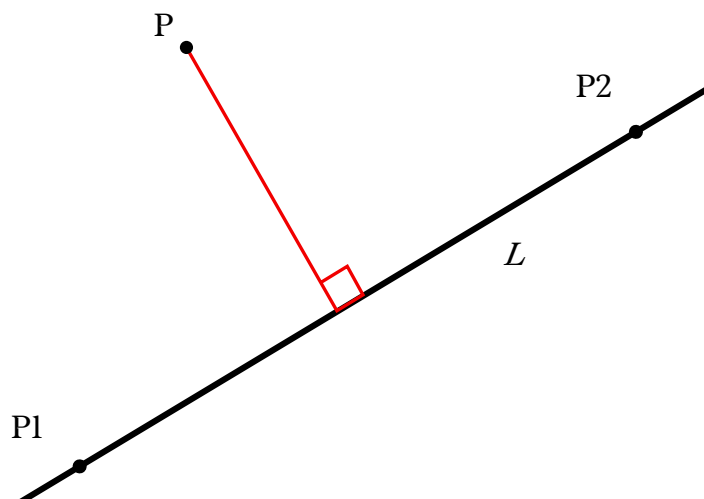

10.1 Using the implicit equation form

Let's find the distance from a given point P and a given line L . Let d be the distance between them. Bring L to the implicit form $ax + by = c$.

$$d = \frac{|ax_p + by_p + c|}{\sqrt{a^2 + b^2}}$$

10.2 Using an L defined by two points P_1, P_2

With $P = (x_0, y_0)$, $P_1 = (x_1, y_1)$ and $P_2 = (x_2, y_2)$.

$$d = \frac{|(x_2 - x_1)(y_1 - y_0) - (x_1 - x_0)(y_2 - y_1)|}{\sqrt{((x_2 - x_1)^2 + (y_2 - y_1)^2)}}$$

10.3 Using an L defined by a point P_l and angle $\hat{\theta}$

$$d = \left| \cos(\hat{\theta})(P_{ly} - y_p) - \sin(\hat{\theta})(P_{lx} - P_x) \right|$$

The code

This function uses the implicit form.

```
type Line = (i64, i64, i64);
pub fn distance_line_to_point((x, y): Point, (a, b, c): Line) -> f64 {
  let d = f64::sqrt((a * a + b * b) as f64);
  if d == 0.0 {
    0.
  } else {
    (a * x + b * y + c) as f64 / d
  }
}
```

This code is included in the distributed library file in the *Data representation* chapter.

lines

Chapter 11

Perpendicular lines

lines

11.1 Find perpendicular to line that passes through given point

Now, we wish to find the equation of the line that passes through P and is perpendicular to L . Let's call it L_{\perp} . L in implicit form is $ax + by + c = 0$. The perpendicular will be:

$$L_{\perp} : bx - ay + (aP_y - bP_x) = 0$$

The code

This code is included in the distributed library file in the *Data representation* chapter.

```
type Line = (i64, i64, i64);
fn perpendicular((a, b, c): Line, p: Point) -> Line {
  (b, -1 * a, a * p.1 - b * p.0)
}
```

11.2 Find point in line that belongs to the perpendicular of given point

The code

This code is included in the distributed library file in the *Data representation* chapter.

```
fn point_perpendicular((a, b, c): Line, p: Point) -> Point {
  let d = (a * a + b * b) as f64;
  if d == 0. {
    return (0, 0);
  }
}
```


```
let cp = a * p.1 - b * p.0;  
(  
  ((-a * c - b * cp) as f64 / d) as i64,  
  ((a * cp - b * c) as f64 / d) as i64,  
)  
}
```

lines

Chapter 12

Angle between two lines

lines

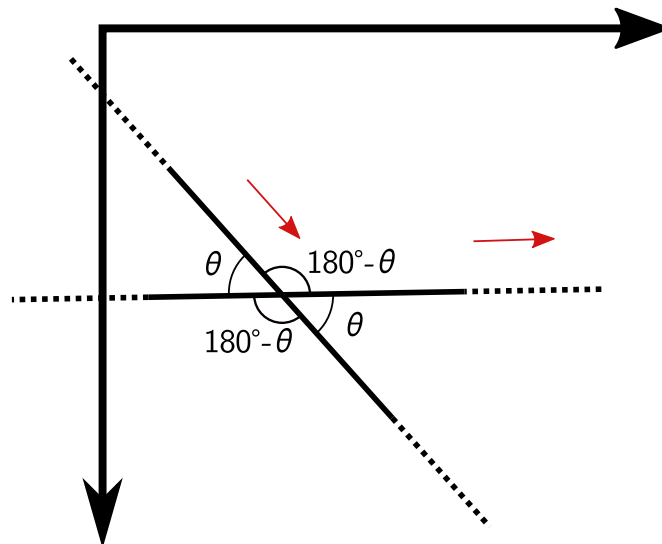

By angle we mean the angle formed by the two directions of the lines; and direction vectors start from the origin (in the figure, they are the **red arrows**). So if we want any of the other three angles, we already know them from basic geometry as shown in the figure above.

If you prefer using the implicit equation, bring the two lines L_1 and L_2 to that form ($a_1x + b_1y + c = 0$ and $a_2x + b_2y + c_2 = 0$) and you can directly find $\hat{\theta}$ with the formula:

$$\hat{\theta} = \arccos \frac{a_1a_2 + b_1b_2}{\sqrt{(a_1^2 + b_1^2)(a_2^2 + b_2^2)}}$$

For the following parametric equations of L_1, L_2 :

$$L_1 = (\{x = x_1 + f_1 t\}, \{y = y_1 + g_1 t\})$$

$$L_2 = (\{x = x_2 + f_2 s\}, \{y = y_2 + g_2 s\})$$

the formula is:

$$\hat{\theta} = \arccos \frac{f_1 f_2 + g_1 g_2}{\sqrt{(f_1^2 + g_1^2)(f_2^2 + g_2^2)}}$$

The code:


```
fn find_angle((a1, b1, c1): (i64, i64, i64), (a2, b2, c2): (i64, i64, i64)) -> f64 {
    let nom = (a1 * a2 + b1 * b2) as f64;
    let denom = ((a1 * a1 + b1 * b1) * (a2 * a2 + b2 * b2)) as f64;
    f64::acos(nom / f64::sqrt(denom))
}
```

src/bin/anglebe



lines

This code file is a PDF attachment

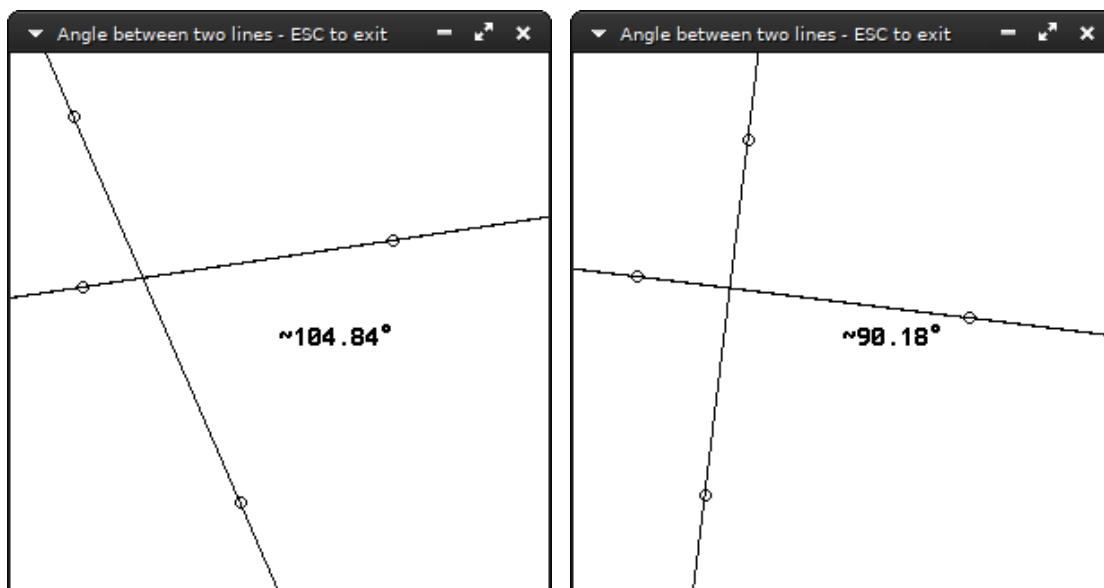


The `src/bin/anglebetweenlines.rs` example has two interactive lines and computes their angle with 64bit floating point accuracy.

Chapter 13

Intersection of two lines

lines

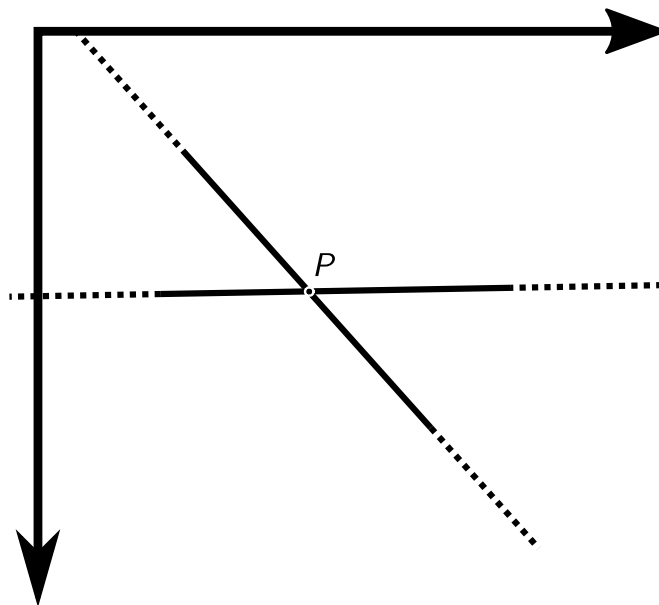

If the lines L_1, L_2 are in implicit form ($a_1x + b_1y + c = 0$ and $a_2x + b_2y + c_2 = 0$), the result comes after checking if the lines are parallel (in which case there's no single point of intersection):

$$a_1b_2 - a_2b_1 \neq 0$$

If they are not parallel, P is:

$$P = \left(\frac{b_1c_2 - b_2c_1}{a_1b_2 - a_2b_1}, \frac{a_2c_1 - a_1c_2}{a_1b_2 - a_2b_1} \right)$$


The code:

```
fn find_intersection((a1, b1, c1): (i64, i64, i64), (a2, b2, c2): (i64, i64, i64)) ->
  ↪ Option<Point> {
    let denom = a1 * b2 - a2 * b1;
    if denom == 0 {
      return None;
    }
    Some(((b1 * c2 - b2 * c1) / denom, (a2 * c1 - a1 * c2) / denom))
  }
```

src/bin/lineintersection.rs:



This code file is a PDF attachment

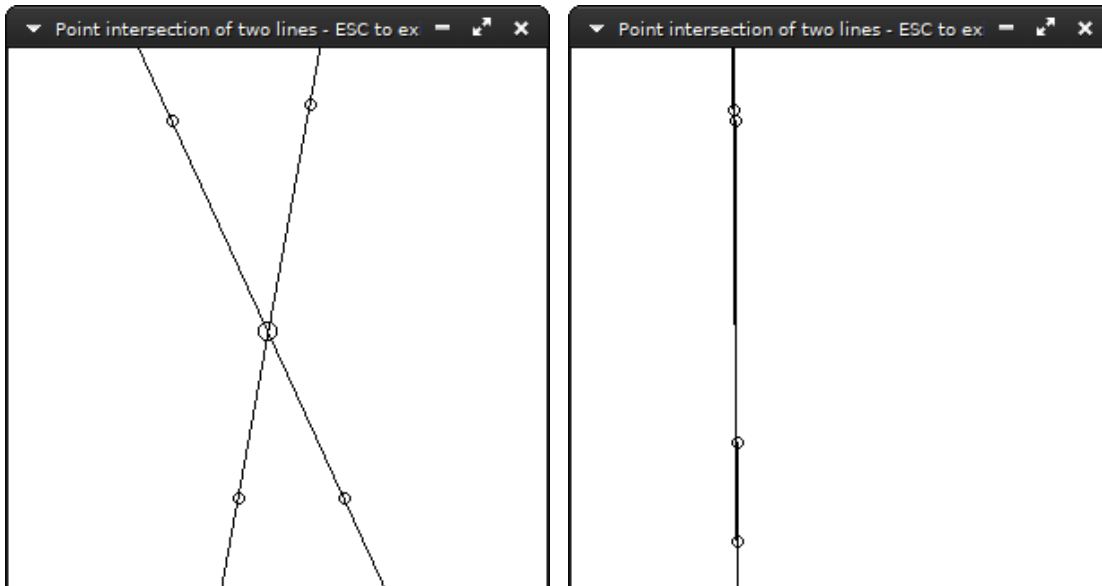


The src/bin/lineintersection.rs example has two interactive lines and computes their point of intersection.

lines

Chapter 14

Line equidistant from two points

lines

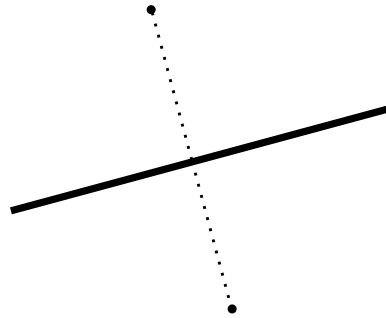

Let's name this line L . From previous chapter* we know how to get the line L that's created by the two points M and N :

$$L : (y_M - y_N)x + (x_N - x_M)y + (x_M y_N - x_N y_M) = 0$$

We need the perpendicular line over the midpoint of L .[†] The midpoint also satisfies L 's equation. The midpoint's coordinates are intuitively:

$$P_{mid} = \left(\frac{x_M + x_N}{2}, \frac{y_M + y_N}{2} \right)$$

The perpendicular's L_{\perp} equation is

$$L_{EQ} = L_{\perp} : yx - ay + (aP_{mid_y} - bP_{mid_x}) = 0$$

*See *Line through two points*, page 23

[†]See *Perpendicular lines*, page 28


The code:

```
fn find_equidistant(point_a: Point, point_b: Point) -> (i64, i64, i64) {
    let (xa, ya) = point_a;
    let (xb, yb) = point_b;
    let midpoint = ((xa + xb) / 2, (ya + yb) / 2);
    let al = ya - yb;
    let bl = xb - xa;
    // If we had subpixel accuracy, we could do:
    //assert_eq!(al*midpoint.0+bl*midpoint.1, -cl);
    let a = bl;
    let b = -1 * al;
    let c = (al * midpoint.1) - (bl * midpoint.0);
    (a, b, c)
}
```

src/bin/equidistant.rs:



This code file is a PDF attachment

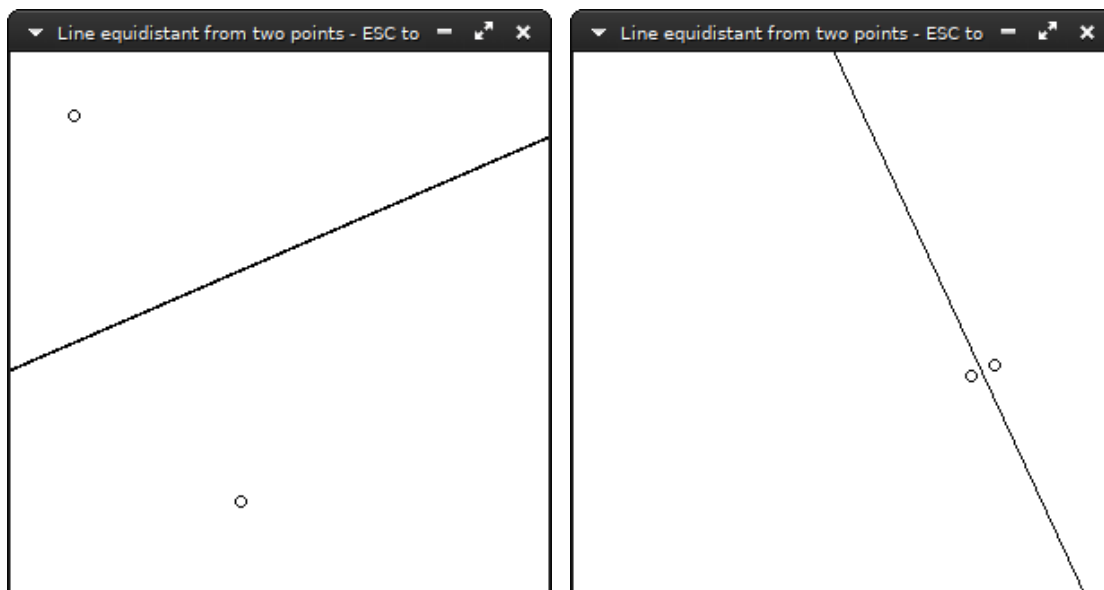


The `src/bin/equidistant.rs` example has two interactive points and computes their L_{EQ} .

lines

Chapter 15

Reflection of point on line

lines

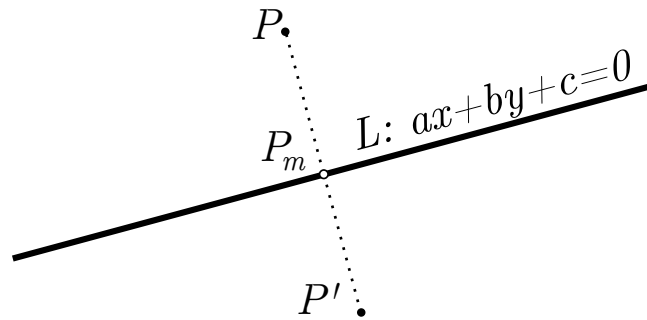

Line PP' will be perpendicular to $L : ax + by + c = 0$, meaning they will satisfy the equation $L_{\perp} : bx - ay + (aP_y - bP_x) = 0$.^{*} We will find the midpoint P_m . L and L_{\perp} intercept at P_m , so substituting L_{\perp} 's y to L gives:

$$\begin{aligned} ax + b \left(\frac{bx + (aP_y - bP_x)}{a} \right) + c &= 0 \\ \Rightarrow ax + \frac{b^2}{a}x + bP_y - \frac{b^2}{a}P_x + c &= 0 \\ \Rightarrow \left(a + \frac{b^2}{a} \right)x &= \frac{b^2}{a}P_x - c - bP_y \\ \Rightarrow x &= \left(\frac{\frac{b^2}{a}P_x - c - bP_y}{a + \frac{b^2}{a}} \right) \end{aligned}$$

^{*}See *Perpendicular lines*, page 28

P_{m_y} is found by substituting P_{m_x} to L . Now, knowing length of $PP_m = \text{length of } P_m P'$, we can find P'_x and P'_y :

$$\begin{aligned} P_{m_x} - P_x &= P'_x - P_{m_x} \\ P_{m_y} - P_y &= P'_y - P_{m_y} \\ \Rightarrow P'_x &= 2P_{m_x} - P_x \\ P'_y &= 2P_{m_y} - P_y \end{aligned}$$


The code

```
fn find_mirror(point: Point, l: Line) -> Point {
    let (x, y) = point;
    let (a, b, c) = l;
    let (a, b, c) = (a as f64, b as f64, c as f64);
    let b2a = (b * b) / a;
    let mx = (b2a * x as f64 - c - b * y as f64) / (a + b2a);
    let my = (-a * mx - c) / b;
    let (mx, my) = (mx as i64, my as i64);
    (2 * mx - x, 2 * my - y)
}
```

src/bin/mirror.rs



This code file is a PDF attachment

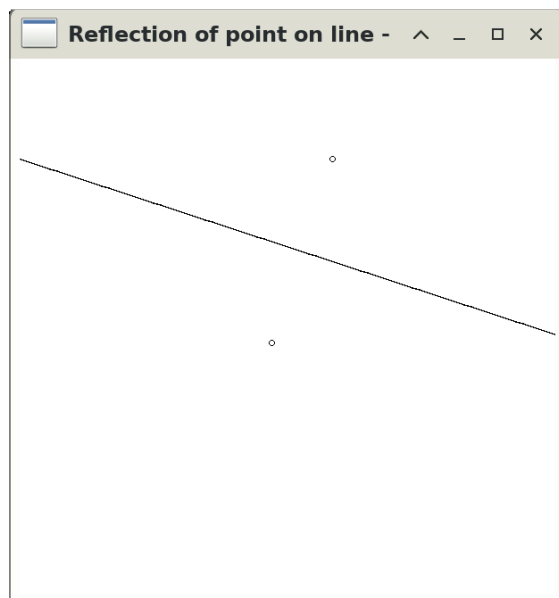

The `src/bin/mirror.rs` example lets you drag a point and draws its reflection across a line.

Chapter 16

Normal to a line through a point

lines

Add Normal to a line through a point

A series of horizontal gray bars, likely representing a list or table. The bars are arranged in a single column and are of varying lengths, suggesting a list of items or a table with multiple rows. The bars are light gray and have a thin black border.

Chapter 17

Angle sectioning

lines


17.1 Bisection



17.2 Trisection

If the title startled you, be assured it's not a joke. It's totally possible to trisect an angle... with a ruler. The adage that angle trisection is impossible refers to using only a compass and unmarked straightedge.





lines

Part III

Points And Line Segments


segments

Chapter 18

Drawing a line segment from its two endpoints

segments

For any line segment with any slope, pixels must be matched with the infinite amount of points contained in the segment. As shown in the following figure, a segment *touches* some pixels; we could fill them using an algorithm and get a bitmap of the line segment.

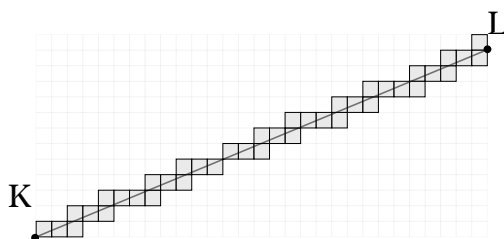

The algorithm presented here was first derived by Bresenham. In the *Image* implementation, it is used in the `plot_line_width` method.

```
pub fn plot_line_width(&mut self, (x1, y1): (i64, i64), (x2, y2): (i64, i64)) {  
    /* Bresenham's line algorithm */  
    let mut d;  
    let mut x: i64;  
    let mut y: i64;  
    let ax: i64;  
    let ay: i64;  
    let sx: i64;  
    let sy: i64;  
    let dx: i64;  
    let dy: i64;  
  
    dx = x2 - x1;  
    ax = (dx * 2).abs();  
    sx = if dx > 0 { 1 } else { -1 };  
    dy = y2 - y1;  
    ay = (dy * 2).abs();  
    sy = if dy > 0 { 1 } else { -1 };  
  
    if ax > ay {  
        d = 1 - ax;  
        x = x1;  
        y = y1;  
        while x != x2 {  
            if d < 0 {  
                d += ay;  
                x = x + sx;  
            } else {  
                d += ax;  
                y = y + sy;  
            }  
            self.plot(x, y);  
        }  
    } else {  
        d = 1 - ay;  
        x = x1;  
        y = y1;  
        while y != y2 {  
            if d < 0 {  
                d += ax;  
                x = x + sx;  
            } else {  
                d += ay;  
                y = y + sy;  
            }  
            self.plot(x, y);  
        }  
    }  
}
```

```

dy = y2 - y1;
ay = (dy * 2).abs();
sy = if dy > 0 { 1 } else { -1 };
x = x1;
y = y1;

let b = dx / dy;
let a = 1;
let double_d = (_wd * f64::sqrt((a * a + b * b) as f64)) as i64;
let delta = double_d / 2;

if ax > ay {
  d = ay - ax / 2;
  loop {
    self.plot(x, y);
    if x == x2 {
      return;
    }
    if d >= 0 {
      y = y + sy;
      d = d - ax;
    }
    x = x + sx;
    d = d + ay;
  }
} else {
  d = ax - ay / 2;
  let delta = double_d / 3;
  loop {
    self.plot(x, y);
    if y == y2 {
      return;
    }
    if d >= 0 {
      x = x + sx;
      d = d - ay;
    }
    y = y + sy;
    d = d + ax;
  }
}
}

```

segments

Add some explanation behind the algorithm in *Drawing a line segment from its two endpoints*

Chapter 19

Drawing line segments with width

segments

```
pub fn plot_line_width(&mut self, (x1, y1): (i64, i64), (x2, y2): (i64, i64), _wd: f64) {  
    /* Bresenham's line algorithm */  
    let mut d;  
    let mut x: i64;  
    let mut y: i64;  
    let ax: i64;  
    let ay: i64;  
    let sx: i64;  
    let sy: i64;  
    let dx: i64;  
    let dy: i64;  
  
    dx = x2 - x1;  
    ax = (dx * 2).abs();  
    sx = if dx > 0 { 1 } else { -1 };  
    dy = y2 - y1;  
    ay = (dy * 2).abs();  
    sy = if dy > 0 { 1 } else { -1 };  
  
    x = x1;  
    y = y1;  
  
    let b = dx / dy;  
    let a = 1;  
    let double_d = (_wd * f64::sqrt((a * a + b * b) as f64)) as i64;  
    let delta = double_d / 2;  
  
    if ax > ay {  
        d = ay - ax / 2;  
        loop {  
            self.plot(x, y);  
            {  
                let total = |_x| _x - (y * dx) / dy + (y1 * dx) / dy - x1;  
                let mut _x = x;  
                loop {  
                    let t = total(_x);  
                    if t < -1 * delta || t > delta {  
                        break;  
                    }  
                    _x += 1;  
                    self.plot(_x, y);  
                }  
            }  
            let mut _x = x;  
            loop {  
                let t = total(_x);  
                if t < -1 * delta || t > delta {  
                    break;  
                }  
                _x -= 1;  
                self.plot(_x, y);  
            }  
        }  
    }  
}
```

```

        if x == x2 {
            return;
        }
        if d >= 0 {
            y = y + sy;
            d = d - ax;
        }
        x = x + sx;
        d = d + ay;
    }
} else {
    d = ax - ay / 2;
    let delta = double_d / 3;
    loop {
        self.plot(x, y);
        {
            let total = |_x| _x - (y * dx) / dy + (y1 * dx) / dy - x1;
            let mut _x = x;
            loop {
                let t = total(_x);
                if t < -1 * delta || t > delta {
                    break;
                }
                _x += 1;
                self.plot(_x, y);
            }
            let mut _x = x;
            loop {
                let t = total(_x);
                if t < -1 * delta || t > delta {
                    break;
                }
                _x -= 1;
                self.plot(_x, y);
            }
        }
    }
    if y == y2 {
        return;
    }
    if d >= 0 {
        x = x + sx;
        d = d - ay;
    }
    y = y + sy;
    d = d + ax;
}
}
}
}

```

segments

Chapter 20

Intersection of two line segments

Let points $\mathbf{1} = (x_1, y_1)$, $\mathbf{2} = (x_2, y_2)$, $\mathbf{3} = (x_3, y_3)$ and $\mathbf{4} = (x_4, y_4)$ and $\mathbf{1,2}$, $\mathbf{3,4}$ two line segments they form. We wish to find their intersection:

First, get the equation of line L_{12} and line L_{34} from chapter *Equations of a line*.

Substitute points $\mathbf{3}$ and $\mathbf{4}$ in equation L_{12} to compute $r_3 = L_{12}(\mathbf{3})$ and $r_4 = L_{12}(\mathbf{4})$ respectively.

If $r_3 \neq 0$, $r_4 \neq 0$ and $\text{sgn}(r_3) \neq \text{sgn}(r_4)$ the line segments don't intersect, so stop.

In L_{34} substitute point $\mathbf{1}$ to compute r_1 , and do the same for point $\mathbf{2}$.

If $r_1 \neq 0$, $r_2 \neq 0$ and $\text{sgn}(r_1) \neq \text{sgn}(r_2)$ the line segments don't intersect, so stop.

At this point, L_{12} and L_{34} either intersect or are equivalent. Find their intersection point. (See *Intersection of two lines* page 32)

20.1 Fast intersection of two line segments





segments

Part IV

Points, Lines and Circles

circles

[Redacted text block]

Chapter 21


Equations of a circle

Add Equations of a circle

circles

Chapter 22

Bounding circle

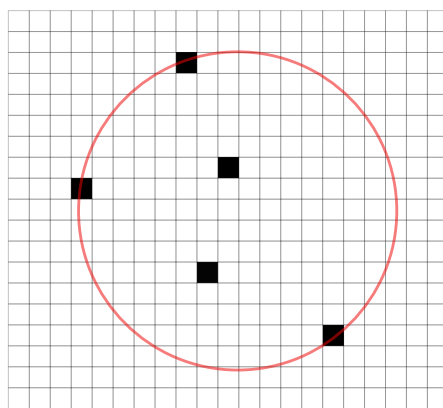

src/bin/boundingcircle.rs:



This code file is a PDF attachment


circles

A bounding circle is a circle that includes all the points in a given set. Usually we're interested in one of the smallest ones possible.




We can use the following methodology to find the bounding circle: start from two points and the circle they make up, and for each of the rest of the points check if the circle includes them. If not, make a bounding circle that includes every point up to the current one. To do this, we need some primitive operations.

We will need a way to construct a circle out of two points:



```
let p1 = points[0];
let p2 = points[1];
//The circle is determined by two points, P and Q. The center of the circle
↪ is
//at (P + Q)/2.0 and the radius is |(P - Q)/2.0|
let d_2 = (
  ((p1.0 + p2.0) / 2), (p1.1 + p2.1) / 2),
  (distance_between_two_points(p1, p2) / 2.0),
);
```

And a way to make a circle out of three points:



```
fn min_circle_w_3_points(q1: Point, q2: Point, q3: Point) -> Circle {
  let (ax, ay) = (q1.0 as f64, q1.1 as f64);
  let (bx, by) = (q2.0 as f64, q2.1 as f64);
  let (cx, cy) = (q3.0 as f64, q3.1 as f64);

  let mut d = 2. * (ax * (by - cy) + bx * (cy - ay) + cx * (ay - by));
  if d == 0.0 {
    d = std::cmp::max(
      std::cmp::max(
        distance_between_two_points(q1, q2) as i64,
        distance_between_two_points(q2, q3) as i64,
      ),
      distance_between_two_points(q1, q3) as i64,
    ) as f64
    / 2.;
  }
  let ux = ((ax * ax + ay * ay) * (by - cy)
    + (bx * bx + by * by) * (cy - ay)
    + (cx * cx + cy * cy) * (ay - by))
    / d;
  let uy = ((ax * ax + ay * ay) * (cx - bx)
```

```

    + (bx * bx + by * by) * (ax - cx)
    + (cx * cx + cy * cy) * (bx - ax))
    / d;
let mut center = (ux as i64, uy as i64);
if center.0 < 0 {
    center.0 = 0;
}
if center.1 < 0 {
    center.1 = 0;
}
let d = distance_between_two_points(center, q1);
(center, d)
}

```

The algorithm:

```

use bitmappers_companion::*;
use minifb::{Key, Window, WindowOptions};
use rand::seq::SliceRandom;
use rand::thread_rng;
use std::f64::consts::{FRAC_PI_2, PI};

include!("../me.xbm.rs");

const WINDOW_WIDTH: usize = 400;
const WINDOW_HEIGHT: usize = 400;

pub fn distance_between_two_points(p_k: Point, p_l: Point) -> f64 {
    let (x_k, y_k) = p_k;
    let (x_l, y_l) = p_l;
    let xlk = x_l - x_k;
    let ylk = y_l - y_k;
    f64::sqrt((xk * xk + yk * yk) as f64)
}

fn image_to_points(image: &Image) -> Vec<Point> {
    let mut ret = Vec::with_capacity(image.bytes.len());
    for y in 0..(image.height as i64) {
        for x in 0..(image.width as i64) {
            if image.get(x, y) == Some(BLACK) {
                ret.push((x, y));
            }
        }
    }
    ret
}

type Circle = (Point, f64);

fn bc(image: &Image) -> Circle {
    let mut points = image_to_points(image);
    points.shuffle(&mut thread_rng());
    min_circle(&points)
}

fn min_circle(points: &[Point]) -> Circle {
    let mut points = points.to_vec();
    points.shuffle(&mut thread_rng());

    let p1 = points[0];
    let p2 = points[1];
    //The circle is determined by two points, P and Q. The center of the
    circle is
    //at (P + Q)/2.0 and the radius is |(P - Q)/2.0|
    let d_2 = (
        ((p1.0 + p2.0) / 2), (p1.1 + p2.1) / 2),
        (distance_between_two_points(p1, p2) / 2.0),
    );
    let mut d_prev = d_2;

    for i in 2..points.len() {
        let p_i = points[i];
        if distance_between_two_points(p_i, d_prev.0) <= (d_prev.1) {
            // then d_i = d_{i-1}

```

circles

```

    } else {
        let new = min_circle_w_point(&points[..i], p_i);
        if distance_between_two_points(p_i, new.0) <= (new.1) {
            d_prev = new;
        }
    }
}
d_prev
}

fn min_circle_w_point(points: &[Point], q: Point) -> Circle {
    let mut points = points.to_vec();
    points.shuffle(&mut thread_rng());
    let p1 = points[0];
    //The circle is determined by two points, P_1 and Q. The center of the
    ↪ circle is
    //at (P_1 + Q)/2.0 and the radius is |(P_1 - Q)/2.0|
    let d_1 = (
        ((p1.0 + q.0) / 2), (p1.1 + q.1) / 2),
        (distance_between_two_points(p1, q) / 2.0),
    );
    let mut d_prev = d_1;
    for j in 1..points.len() {
        let p_j = points[j];
        if distance_between_two_points(p_j, d_prev.0) <= (d_prev.1) {
            //d_prev = d_prev;
        } else {
            let new = min_circle_w_points(&points[..j], p_j, q);
            if distance_between_two_points(p_j, new.0) <= (new.1) {
                d_prev = new;
            }
        }
    }
    d_prev
}

fn min_circle_w_points(points: &[Point], q1: Point, q2: Point) -> Circle {
    let mut points = points.to_vec();
    let d_0 = (
        ((q1.0 + q2.0) / 2), (q1.1 + q2.1) / 2),
        (distance_between_two_points(q1, q2) / 2.0),
    );
    let mut d_prev = d_0;
    for k in 0..points.len() {
        let p_k = points[k];
        if distance_between_two_points(p_k, d_prev.0) <= (d_prev.1) {
        } else {
            let new = min_circle_w_3_points(q1, q2, p_k);
            if distance_between_two_points(p_k, new.0) <= (new.1) {
                d_prev = new;
            }
        }
    }
    d_prev
}

fn min_circle_w_3_points(q1: Point, q2: Point, q3: Point) -> Circle {
    let (ax, ay) = (q1.0 as f64, q1.1 as f64);
    let (bx, by) = (q2.0 as f64, q2.1 as f64);
    let (cx, cy) = (q3.0 as f64, q3.1 as f64);
    let mut d = 2. * (ax * (by - cy) + bx * (cy - ay) + cx * (ay - by));
    if d == 0.0 {
        d = std::cmp::max(
            std::cmp::max(
                distance_between_two_points(q1, q2) as i64,
                distance_between_two_points(q2, q3) as i64,
            ),
            distance_between_two_points(q1, q3) as i64,
        ) as f64
        / 2.;
    }
}

```

```

let ux = ((ax * ax + ay * ay) * (by - cy)
  + (bx * bx + by * by) * (cy - ay)
  + (cx * cx + cy * cy) * (ay - by))
  / d;
let uy = ((ax * ax + ay * ay) * (cx - bx)
  + (bx * bx + by * by) * (ax - cx)
  + (cx * cx + cy * cy) * (bx - ax))
  / d;
let mut center = (ux as i64, uy as i64);
if center.0 < 0 {
  center.0 = 0;
}
if center.1 < 0 {
  center.1 = 0;
}
let d = distance_between_two_points(center, q1);
(center, d)
}

fn main() {
  let mut buffer: Vec<u32> = vec![WHITE; WINDOW_WIDTH * WINDOW_HEIGHT];
  let mut window = Window::new(
    "Test - ESC to exit",
    WINDOW_WIDTH,
    WINDOW_HEIGHT,
    WindowOptions {
      title: true,
      //borderless: true,
      resize: true,
      //transparency: true,
      ..WindowOptions::default()
    },
  )
  .unwrap();

  // Limit to max ~60 fps update rate
  window.limit_update_rate(Some(std::time::Duration::from_micros(16600)));

  let mut full = Image::new(WINDOW_WIDTH, WINDOW_HEIGHT, 0, 0);
  let mut image = Image::new(ME_WIDTH, ME_HEIGHT, 45, 45);
  image.bytes = bits_to_bytes(ME_BITS, ME_WIDTH);
  let (center, r) = bc(&image);
  image.draw_outline();

  full.plot_circle((center.0 + 45, center.1 + 45), r as i64, 0.);
  while window.is_open() && !window.is_key_down(Key::Escape) &&
↪ !window.is_key_down(Key::Q) {
    image.draw(&mut buffer, BLACK, None, WINDOW_WIDTH);
    full.draw(&mut buffer, BLACK, None, WINDOW_WIDTH);

    window
      .update_with_buffer(&buffer, WINDOW_WIDTH, WINDOW_HEIGHT)
      .unwrap();

    let millis = std::time::Duration::from_millis(100);
    std::thread::sleep(millis);
  }
}

```

circles

Part V

Points, Lines and Shapes

shapes

Chapter 23

Rectangles and parallelograms



shapes

23.1 From a center point



23.2 From a corner point

Chapter 24

Triangles



24.1 Making a triangle from a point and given angles



Chapter 25

Union, intersection and difference of polygons

Add *Union, intersection and difference of polygons*



shapes

Chapter 26

Centroid of polygon

Add Centroid of polygon



shapes

Chapter 27

Polygon clipping



shapes

Chapter 28

Triangle filling

Add *Triangle filling* explanation

This code is included in the distributed library file in the *Data representation* chapter.

The book's library methods include a `fill_triangle` method:

```
pub fn fill_triangle(&mut self, q1: Point, q2: Point, q3: Point) {
    let make_equation =
        |p1: Point, p2: Point, p3: Point, a: &mut i64, b: &mut i64, c: &mut i64| {
            *a = p2.1 - p1.1;
            *b = p1.0 - p2.0;
            *c = p1.0 * p2.1 - p1.1 * p2.0;

            if *a * p3.0 + *b * p3.1 + *c < 0 {
                *a = -*a;
                *b = -*b;
                *c = -*c;
            }
        };

    let mut x_min = q1.0;
    let mut y_min = q1.1;
    let mut x_max = q1.0;
    let mut y_max = q1.1;
    let mut a = [0_i64; 3];
    let mut b = [0_i64; 3];
    let mut c = [0_i64; 3];

    // find bounding box
    for q in [q1, q2, q3] {
        x_min = std::cmp::min(x_min, q.0);
        x_max = std::cmp::max(x_max, q.0);
        y_min = std::cmp::min(y_min, q.1);
        y_max = std::cmp::max(y_max, q.1);
    }
    make_equation(q1, q2, q3, &mut a[0], &mut b[0], &mut c[0]);
    make_equation(q1, q3, q2, &mut a[1], &mut b[1], &mut c[1]);
    make_equation(q2, q3, q1, &mut a[2], &mut b[2], &mut c[2]);

    let mut d0 = a[0] * x_min + b[0] * y_min + c[0];
    let mut d1 = a[1] * x_min + b[1] * y_min + c[1];
    let mut d2 = a[2] * x_min + b[2] * y_min + c[2];

    for y in y_min..=y_max {
        let mut f0 = d0;
        let mut f1 = d1;
        let mut f2 = d2;

        d0 += b[0];
        d1 += b[1];
        d2 += b[2];

        for x in x_min..=x_max {
```

```
        if f0 >= 0 && f1 >= 0 && f2 >= 0 {  
            self.plot(x, y);  
        }  
        f0 += a[0];  
        f1 += a[1];  
        f2 += a[2];  
    }  
}
```

Chapter 29

Flood filling

Add Flood filling



shapes


Part VI

Curves other than circles

curves

Chapter 30

Parametric elliptical arcs

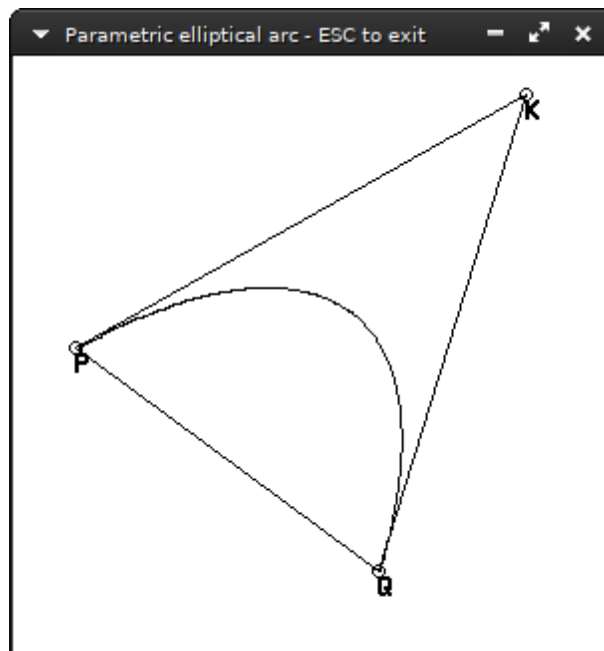

P , Q and K are the arc's control points.

This algorithm* draws an elliptical arc starting from point P and ending at Q . The control point K mirrors the ellipse's center J : drawing the quadrilateral $PKQJ$ would appear as a lozenge, or rhombus.

The parameter t defines the step angle in radians and is limited to $0 < t \leq 1$.

**Graphics Gems III* page 164


For each point calculation, the point is t radians away from the previous one, so to increase the amount of points calculated keep t small.

src/bin/parellarc.rs:



This code file is a PDF attachment

```
fn parellarc(image: &mut Image, p: Point, q: Point, k: Point, t: f64) {
    if t <= 0. || t > 1. {
        return;
    }
    let mut v = ((k.0 - q.0) as f64, (k.1 - q.1) as f64);
    let mut u = ((k.0 - p.0) as f64, (k.1 - p.1) as f64);
    let j = ((p.0 as f64 - v.0 + 0.5), (p.1 as f64 - v.1 + 0.5));
    u = (
        (u.0 * f64::sqrt(1. - t * t * 0.25) - v.0 * t * 0.5),
        (u.1 * f64::sqrt(1. - t * t * 0.25) - v.1 * t * 0.5),
    );
    let n = (std::f64::consts::FRAC_PI_2 / t).floor() as u64;
    let mut prev_pos = p;
    for _ in 0..n {
        let x = (v.0 + j.0).round() as i64;
        let y = (v.1 + j.1).round() as i64;
        let new_point = (x, y);
        image.plot_line_width(prev_pos, new_point, 1.);
        prev_pos = new_point;
        u.0 -= v.0 * t;
        v.0 += u.0 * t;
        u.1 -= v.1 * t;
        v.1 += u.1 * t;
    }
}
```

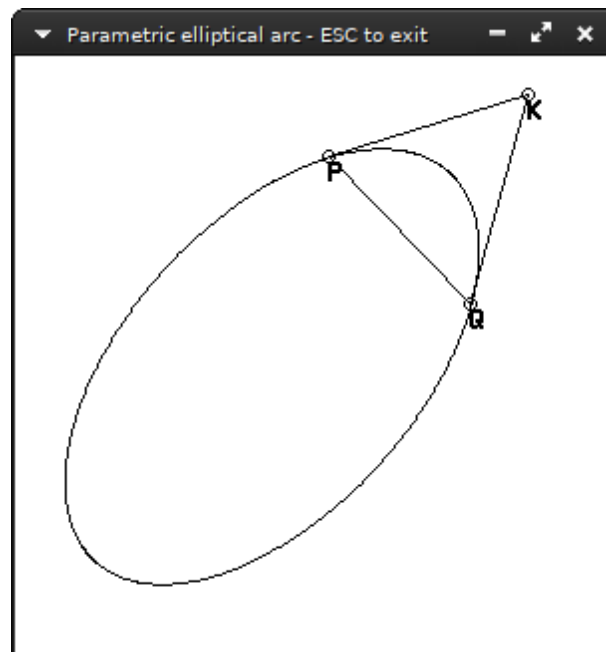


Changing n to $\frac{2\pi}{t}$ draws the entire ellipse.


curves

Chapter 31

Bézier curves

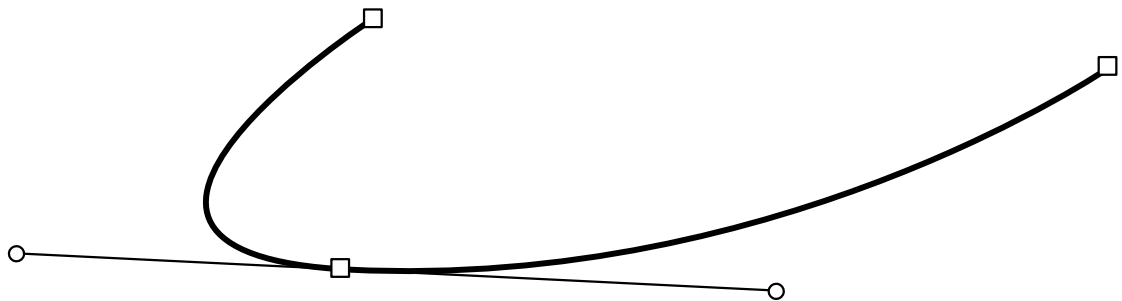


Two cubic *Bézier* curves joined together as displayed in graphics software.



31.1 Quadratic Bézier curves

31.1.1 Drawing the quadratic

To actually draw a curve, i.e. with points P_1, P_2, P_3 we will use *de Casteljau's algorithm*. The gist behind the algorithm is that the length of the curve is visited at specific percentages (e.g. 0%, 0.2%, 0.4% ... 99.8%, 100%), meaning we will have that many steps, and for each such percentage t we calculate a line starting at the t -nth point of P_1P_2 and ending at the t -nth point of P_2P_3 . The t -eth point of that line also belongs to the curve, so we plot it.

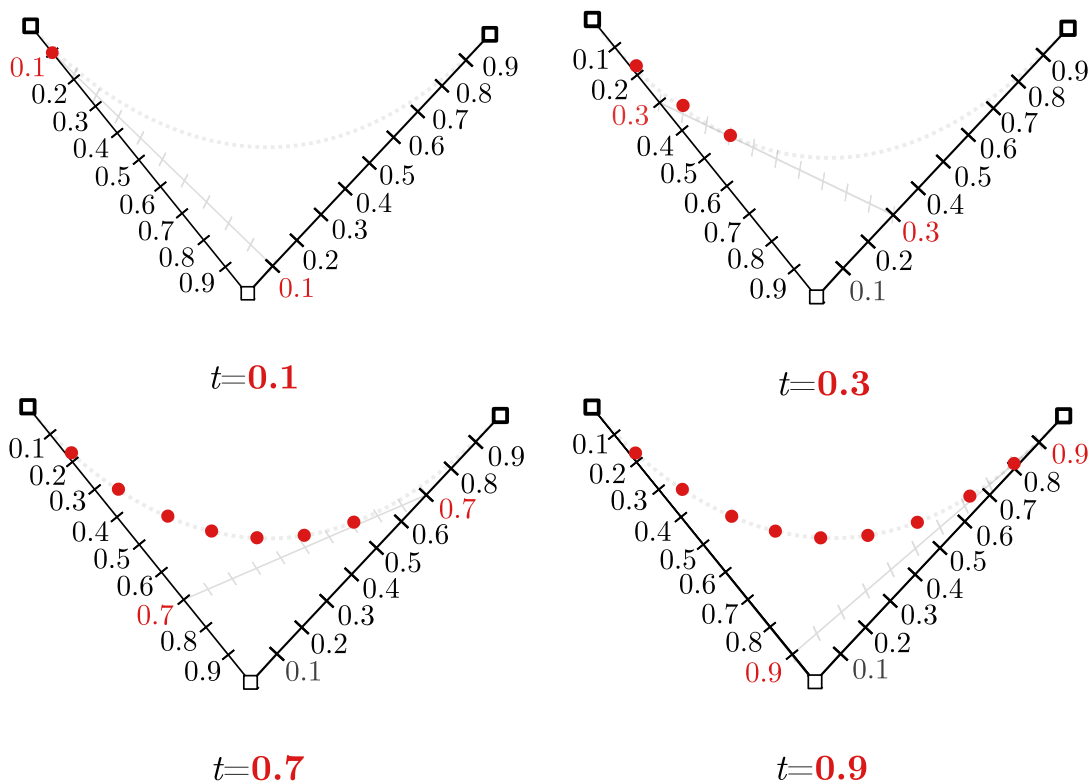


Computing curve points for values of $t \in [0, 1]$ with de Casteljau's algorithm


Let's draw the curve $P_1 = (25, 115), P_2 = (225, 180), P_3 = (250, 25)$



The result:

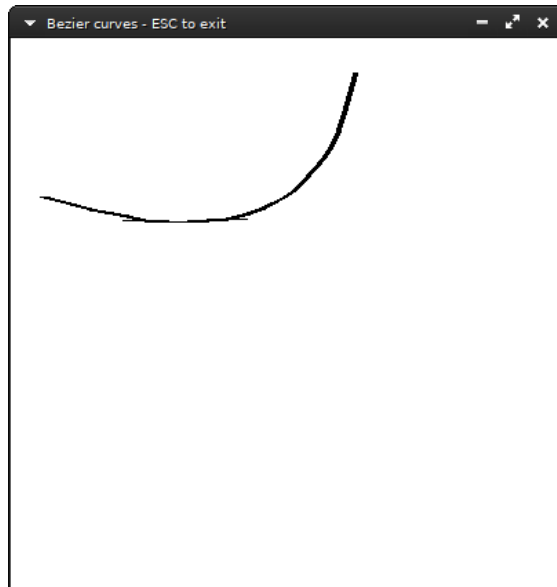

The `minifb` library allows to track user input, so we detect user clicks and the mouse's position; thus we can interactively modify a curve with some modifications in the code:

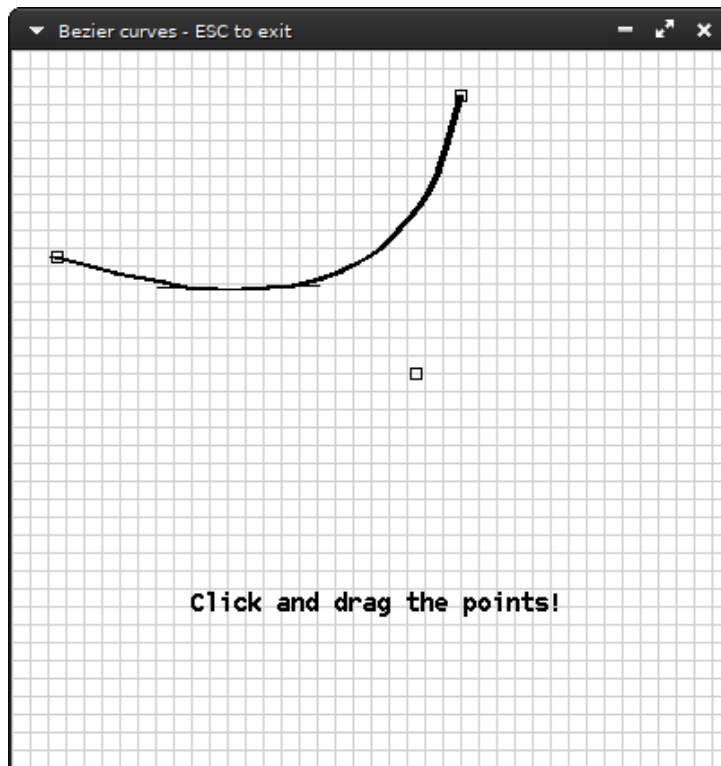

Interactively modifying a curve with the `bezier.rs` tool.

We can go one step further and insult type designers* and use the tool to make a font glyph.

`src/bin/bezier.rs`



curves



This code file is a PDF attachment

Of course, it requires effort to match the beginning and end of each curve that makes up the glyph. That's why font designing tools have *point snapping* to ensure curve continuation. But for a quick font designer app prototype, it's good enough.

*who use cubic Béziers or other fancier curves (*splines*)

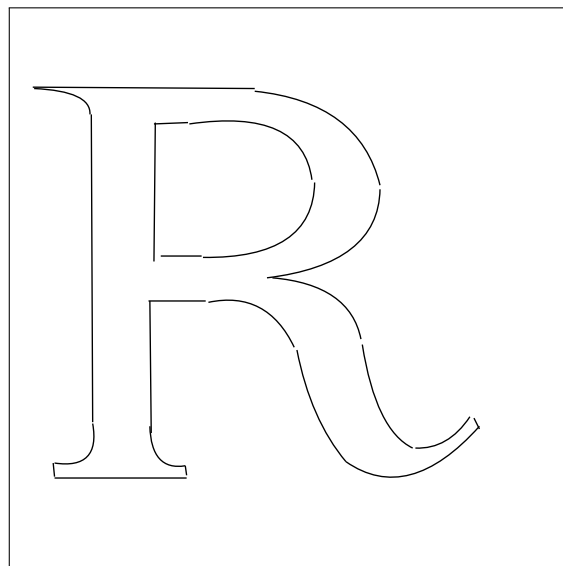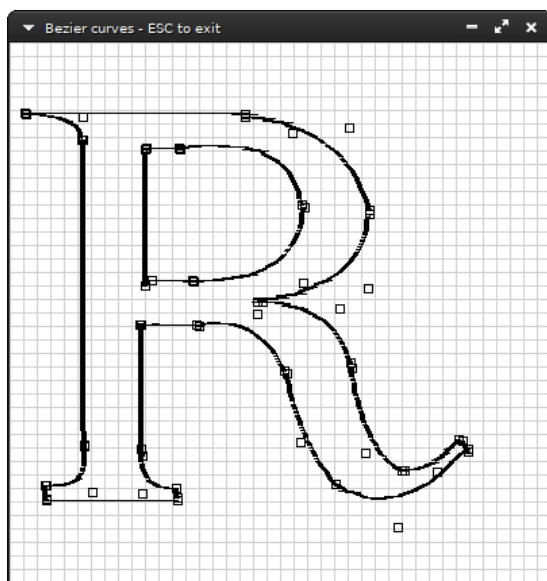

Left: A font glyph drawn with the interactive `bezieryglyph.rs` tool. *Right:* the same glyph exported to SVG.

31.2 Cubic Bézier curves



31.3 Weighted Béziers



Part VII

Vectors, matrices and transformations

Chapter 32

Rotation of a bitmap

$$p' = \begin{bmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{bmatrix} \begin{bmatrix} x_p \\ y_p \end{bmatrix}$$

$$c = \cos \theta, s = \sin \theta, x_{p'} = x_p c - y_p s, y_{p'} = x_p s + y_p c.$$


Let's load an xface. We will use `bits_to_bytes` (See *Bits to byte pixels*, page 14).

```
include!("dmr.rs");
const WINDOW_WIDTH: usize = 100;
const WINDOW_HEIGHT: usize = 100;
let mut image = Image::new(DMR_WIDTH, DMR_HEIGHT, 25, 25);
image.bytes = bits_to_bytes(DMR_BITS, DMR_WIDTH);
```

src/bin/rotation.rs:



This code file is a PDF attachment

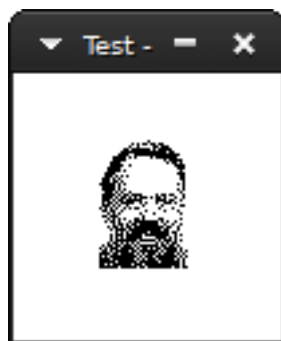


This is the xface of dmr. Instead of displaying the bitmap, this time we will rotate it 0.5 radians. Setup our image first:

```
let mut image = Image::new(DMR_WIDTH, DMR_HEIGHT, 25, 25);
image.draw_outline();
let dmr = bits_to_bytes(DMR_BITS, DMR_WIDTH);
```


And then, loop for each byte in dmr's face and apply the rotation transformation.

```
let angle = 0.5;
let c = f64::cos(angle);
let s = f64::sin(angle);
for y in 0..DMR_HEIGHT {
    for x in 0..DMR_WIDTH {
        if dmr[y * DMR_WIDTH + x] == BLACK {
            let x = x as f64;
            let y = y as f64;
            let xr = x * c - y * s;
            let yr = x * s + y * c;
            image.plot(xr as i64, yr as i64);
        }
    }
}
```

The result:

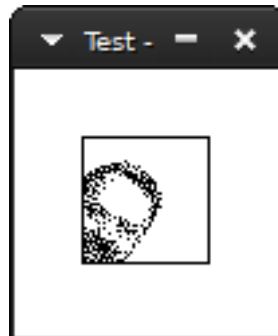

We didn't mention in the beginning that the rotation has to be relative to a *point* and the given transformation is relative to the *origin*, in this case the upper left corner (0,0). So dmr was rotated relative to the origin:

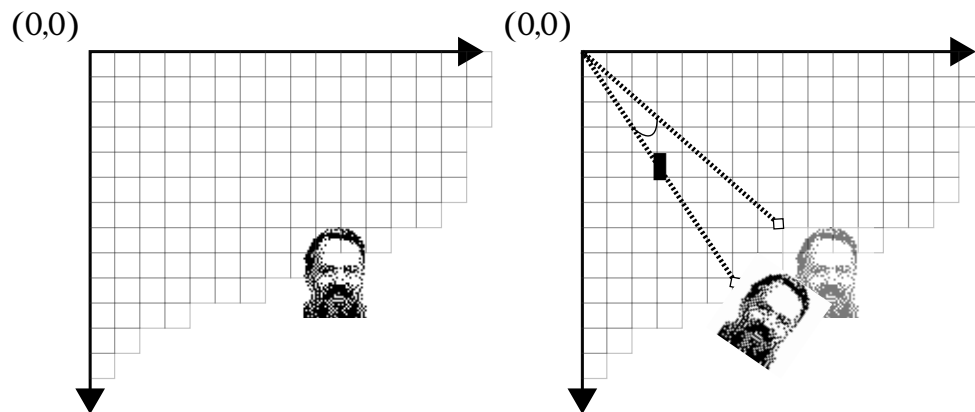

(the distance to the origin (actually 0 pixels) has been exaggerated for the sake of the example)

Usually, we want to rotate something relative to itself. The right point to choose is the *centroid* of the object.

If we have a list of n points, the centroid is calculated as:


$$x_c = \frac{1}{n} \sum_{i=0}^n x_i$$

$$y_c = \frac{1}{n} \sum_{i=0}^n y_i$$


Since in this case we have a rectangle, the centroid has coordinates of half the width and half the height.

By subtracting the centroid from each point before we apply the transformation and then adding it back after we get what we want:


Here's it visually: First subtract the center point.

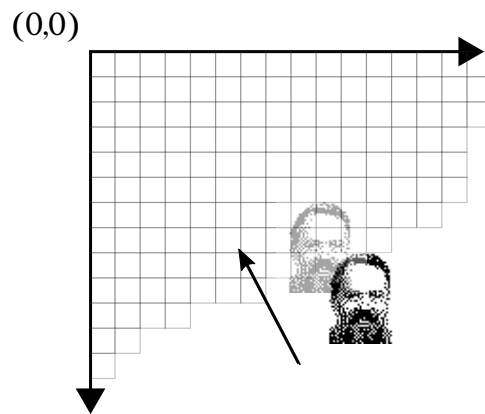

Then, rotate.

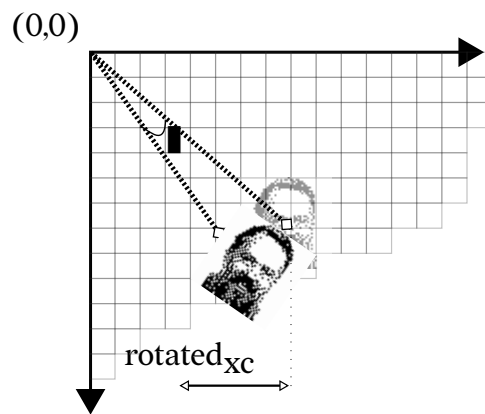


And subtract back to the original position.

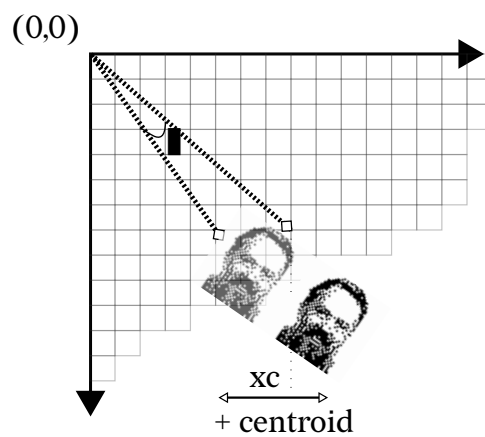

trans-
forma-
tions

In code:

```
let center_point = ((DMR_WIDTH/2) as i64, (DMR_HEIGHT/2) as i64);
for y in 0..DMR_HEIGHT {
  for x in 0..DMR_WIDTH {
    if dmr[y * DMR_WIDTH + x] == BLACK {
      let x = (x as i64 - center_point.0) as f64;
      let y = (y as i64 - center_point.1) as f64;
      let xr = x * c - y * s;
      let yr = x * s + y * c;
      image.plot(xr as i64 + center_point.0,
                 yr as i64 + center_point.1);
    }
  }
}
```

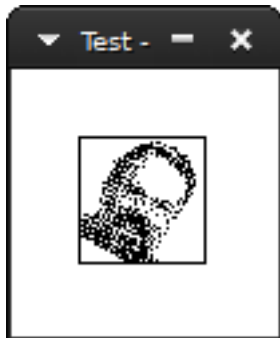

The result:

32.1 Fast 2D Rotation

Add Fast 2D Rotation



trans-
forma-
tions

Chapter 33


90° Rotation of a bitmap by parallel recursive subdivision

Add 90° Rotation of a bitmap by parallel recursive subdivision



Chapter 34

Magnification/Scaling

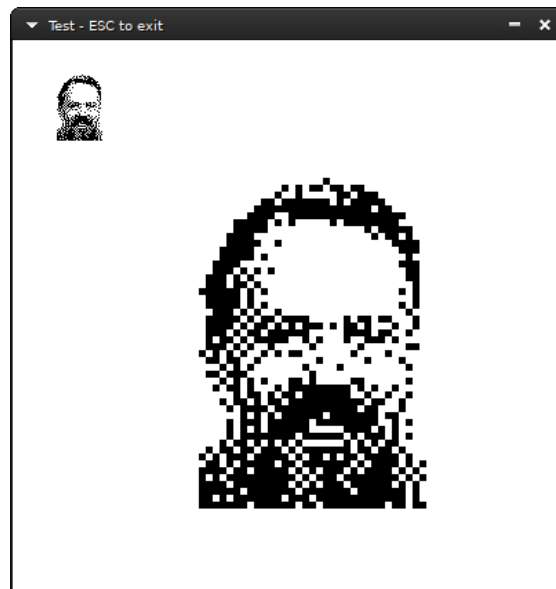

We want to magnify a bitmap without any smoothing. We define an Image scaled to the dimensions we want, and loop for every pixel in the scaled Image. Then, for each pixel, calculate its source in the original bitmap: if the coordinates in the scaled bitmap are (x, y) then the source coordinates (sx, sy) are:

$$sx = \frac{x * original.width}{scaled.width}$$
$$sy = \frac{y * original.height}{scaled.height}$$

So, if (sx, sy) are painted, then (x, y) must be painted as well.

src/bin/scale.rs:



This code file is a PDF attachment

```
let mut original = Image::new(DMR_WIDTH, DMR_HEIGHT, 25, 25);
original.bytes = bits_to_bytes(DMR_BITS, DMR_WIDTH);
original.draw(&mut buffer, BLACK, None, WINDOW_WIDTH);

let mut scaled = Image::new(DMR_WIDTH * 5, DMR_HEIGHT * 5, 100, 100);
let mut sx: i64; //source
let mut sy: i64; //source
let mut dx: i64; //destination
let mut dy: i64 = 0; //destination

let og_height = original.height as i64;
let og_width = original.width as i64;
let scaled_height = scaled.height as i64;
let scaled_width = scaled.width as i64;

while dy < scaled_height {
    sy = (dy * og_height) / scaled_height;
    dx = 0;
    while dx < scaled_width {
        sx = (dx * og_width) / scaled_width;
        if original.get(sx, sy) == Some(BLACK) {
            scaled.plot(dx, dy);
        }
        dx += 1;
    }
    dy += 1;
}
scaled.draw(&mut buffer, BLACK, None, WINDOW_WIDTH);
```

34.1 Smoothing enlarged bitmaps

Add *Smoothing enlarged bitmaps*



34.2 Stretching lines of bitmaps

Add *Stretching lines of bitmaps*





Chapter 35

Mirroring

Add screenshots and figure and code in *Mirroring*

Mirroring to an axis is the transformation of one coordinate to its equidistant value across the axis:

To mirror a pixel across the x axis, simply multiply its coordinates with the following matrix:

$$M_x = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix}$$

This results in the y coordinate's sign being flipped.

For y -mirroring, the transformation follows the same logic:

$$M_y = \begin{bmatrix} -1 & 0 \\ 0 & 1 \end{bmatrix}$$

Chapter 36


Shearing

Simple shearing is the transformation of one dimension by a distance proportional to the other dimension. In x -shearing (or horizontal shearing) only the x coordinate is affected, and likewise in y -shearing only y as well.

src/bin/shearing.rs:



This code file is a PDF attachment

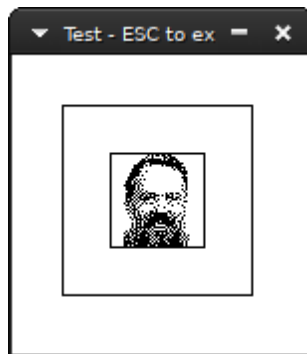


With l being equal to the desired tilt away from the y axis, the transformation is described by the following matrix:

$$S_x = \begin{bmatrix} 1 & l \\ 0 & 1 \end{bmatrix}$$

Which is as simple as this function:


```
fn shear_x((x_p, y_p): (i64, i64), l: f64) -> (i64, i64) {  
    (x_p + (l * (y_p as f64)) as i64, y_p)  
}
```

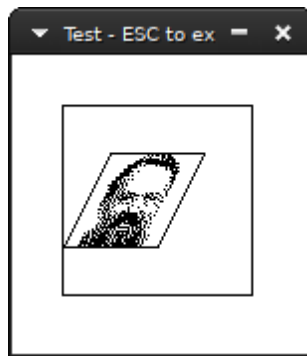

For y -shearing, we have the following:

$$S_y = \begin{bmatrix} 1 & 0 \\ l & 1 \end{bmatrix}$$

```
fn shear_y((x_p, y_p): (i64, i64), l: f64) -> (i64, i64) {
    (x_p, (l*(x_p as f64)) as i64 + y_p)
}
```

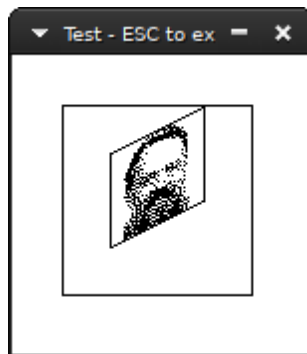

A full example:

```
include!("../dmr.xbm.rs");
const WINDOW_WIDTH: usize = 200;
const WINDOW_HEIGHT: usize = 200;

fn shear_x((x_p, y_p): (i64, i64), l: f64) -> (i64, i64) {
    (x_p+(l*(y_p as f64)) as i64, y_p)
}
fn shear_y((x_p, y_p): (i64, i64), l: f64) -> (i64, i64) {
    (x_p, (l*(x_p as f64)) as i64 + y_p)
}


let mut image = Image::new(DMR_WIDTH, DMR_HEIGHT, 25, 25);
image.bytes = bits_to_bytes(DMR_BITS, DMR_WIDTH);
image.draw_outline();
```

```

let l = -0.5;
let mut sheared = Image::new(DMR_WIDTH*2, DMR_HEIGHT*2, 25, 25);
for x in 0..DMR_WIDTH {
  for y in 0..DMR_HEIGHT {
    if image.bytes[y * DMR_WIDTH + x] == BLACK {
      let p = shear_x((x as i64 ,y as i64 ), l);
      sheared.plot(p.0+(DMR_WIDTH/2) as i64, p.1+(DMR_HEIGHT/2) as i64);
    }
  }
}
sheared.draw_outline();

```

36.1 The relationship between shearing factor and angle

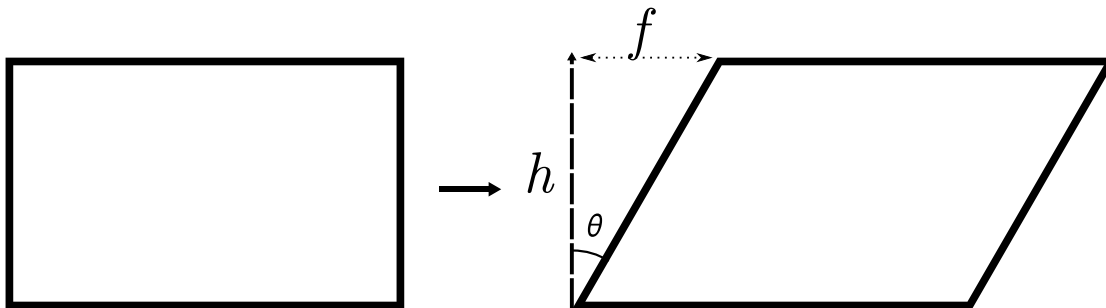

Shearing is a delta movement in one dimension, thus the point before moving and the point after form an angle with the x axis. To move a point $(x, 0)$ by 30° forward we will have the new point $(x + f, 0)$ where f is the shear factor. These two points and (x, h) where h is the height of the bitmap form a triangle, thus the following are true:

$$\cot \theta = \frac{h}{f}$$

Therefore to find your factor for any angle θ replace its cotangent in the following formula:

$$f = \frac{h}{\cot \theta}$$

For example to shear by -30° (meaning the bitmap will move to the right, since rotations are always clockwise) we need $\cot(-30deg) = -\sqrt{3}$ and $f = -\frac{h}{\sqrt{3}}$.

Chapter 37

Projections

Add Projections

Part VIII

Addendum

adden-
dum

Chapter 38

Faster drawing a line segment from its two endpoints using symmetry


Add *Faster drawing a line segment from its two endpoints using symmetry*



Chapter 39

Joining the ends of two wide line segments together

Add *Joining the ends of two wide line segments together*

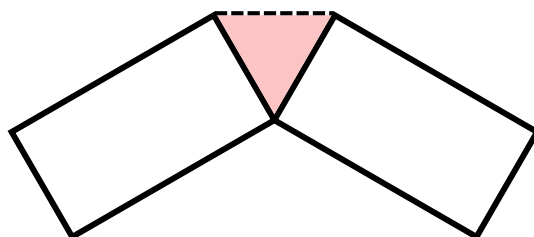

A series of horizontal gray bars, likely representing a stack of paper or a timeline, used for visual context or as a placeholder for additional content.

Chapter 40

Composing monochrome bitmaps with separate alpha channel data

Add *Composing monochrome bitmaps with separate alpha channel data*



Chapter 41

Orthogonal connection of two points


Add *Orthogonal connection of two points*

A series of horizontal gray bars, likely representing a list or table structure. The bars are arranged in a column, with the first bar being the longest and the subsequent bars being slightly shorter, creating a stepped effect. There are 12 bars in total.


Chapter 42

Join segments with round corners

Round corners are everywhere around us. It is useful to know at least one method of construction. This specific method constructs a circle that has a common point with each given line segment, and calculates the arc that when added to the line segments they are smoothly joined. The excess length, since those common points will be before the end of the line segments, must be erased. Therefore, it's best to begin with just the points of the two segments before starting to draw anything.

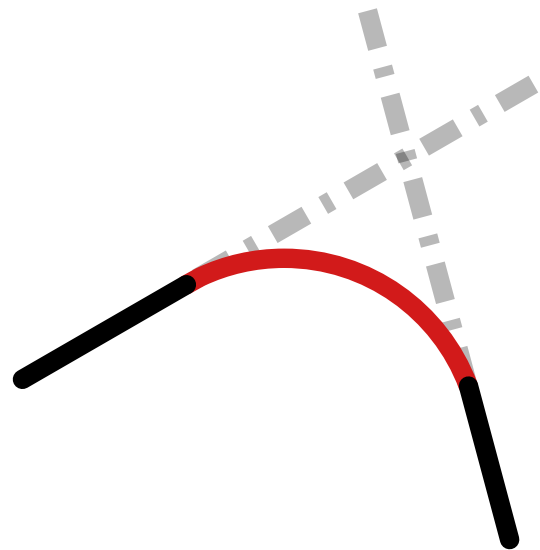

Since the segments intercept, the round corner will end up beneath the intersection. We wish to find a circle that has a common point with each segment and the arc made up from those points and the circle is the round corner we are after.

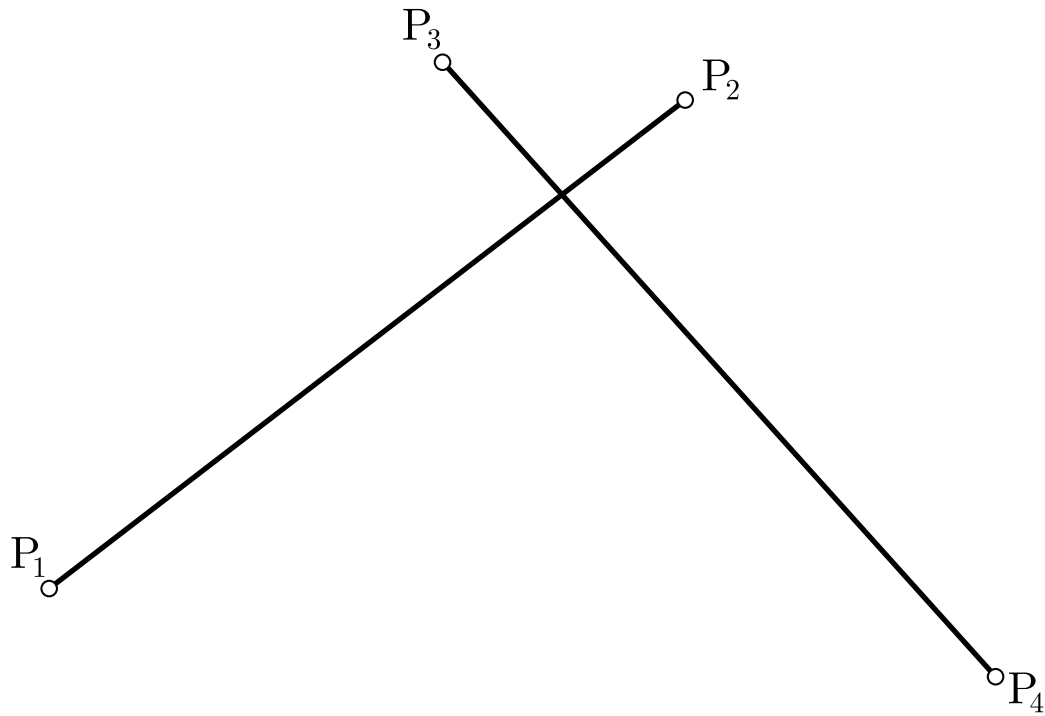

We are given 4 points, P_1, P_2 and P_3, P_4 that make up segments S_1 and S_2 . Begin by finding the midpoints m_1 and m_2 of segments S_1 and S_2 . These will be:

$$m_1 = \frac{P_1 + P_2}{2}$$


$$m_2 = \frac{P_3 + P_4}{2}$$

Then, find the signed distances (i.e. don't use the absolute value of distance) d_1 of m_1 from S_2 and d_2 of m_2 from S_1 .


Construct parallel lines l_1 to S_1 that is d_1 pixels away. Repeat with l_2 for S_2 and d_2 .

Their intersection is the circle's center, P_c .

The intersection of l_1, l_2 with the two segments are the points where we should clip or extend the segments: q_1 and q_2 .

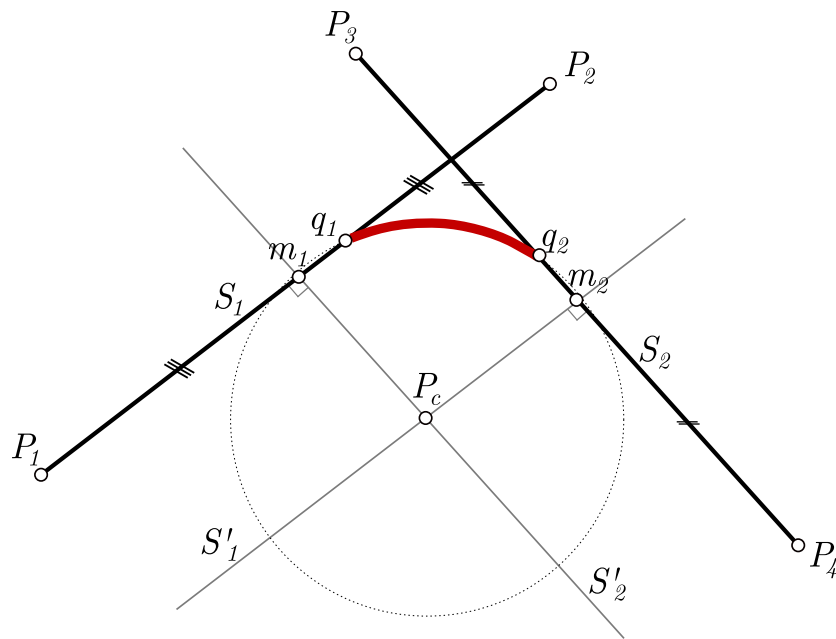

The starting angle is found by calculating the angle of q_1P_c with the x -axis with the `atan2` math library procedure.

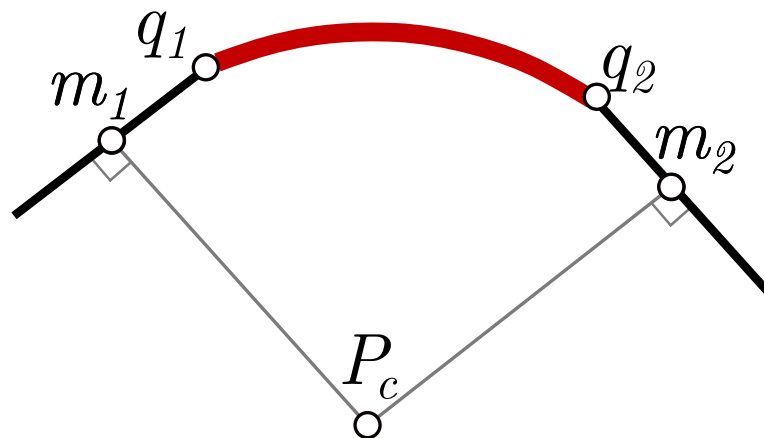

addendum


The *subtended* angle* of the arc from the center P_c is found by calculating the dot product of q_1P_c and q_2P_c :

The code:

src/bin/roundcorner.rs:




This code file is a PDF attachment

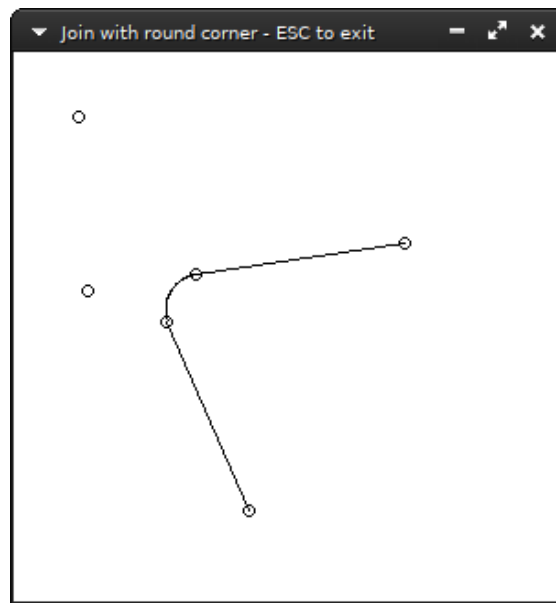

The src/bin/roundcorner.rs example has two interactive lines and computes the joining fillet.


addendum

*the *subtended* angle of an arc \widehat{AC} to a point P is the angle between PA and PC :



Chapter 43

Squircle



src/bin/squircle.rs:



This code file is a PDF
attachment

A *squircle* is a compromise between a square and a circle. It is purported to be more pleasing to the eye because the rounding corner is smoother than that of a circle arc (like the result of *Join segments with round corners*, page 94).

A way to describe a squircle is as a superellipse, meaning a generalization of the ellipse equation $\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$ by making the exponent parametric:

$$|x - a|^n + |y - b|^n = 1$$

The squircle as a superellipse is usually defined for $n = 4$.

The code

```
pub fn plot_squircle(
    image: &mut Image,
    (xm, ym): (i64, i64),
    width: i64,
    height: i64,
    n: i32,
    _wd: f64,
) {
    let r = width / 2;
    let w = width / 2;
    let h = height / 2;
```


```

let mut prev_pos = (xm - w, xm - h);
for i in 0..(2 * r + 1) {
    let x: i64 = (i - r) + w;
    let y: i64 = ((r as f64).powi(n) - (i as f64 - r as f64).abs().powi(n)).powf(1. /
↪ n as f64)
        as i64
        + h;
    if i != 0 {
        image.plot_line_width(prev_pos, (xm - x as i64, ym - y), _wd);
    }
    prev_pos = (xm - x as i64, ym - y);
}
for i in (2 * r)..(4 * r + 1) {
    let x: i64 = (3 * r - i) + w;
    let y = -1
        * ((r as f64).powi(n) - ((3 * r - i) as f64).abs().powi(n)).powf(1. / n as
↪ f64))
        as i64
        + h;
    image.plot_line_width(prev_pos, (xm - x as i64, ym - y), _wd);
    prev_pos = (xm - x as i64, ym - y);
}
}



```

Different values of n

Increasing n in `src/bin/squirrel.rs` makes the hyperellipse corners approach the square's.

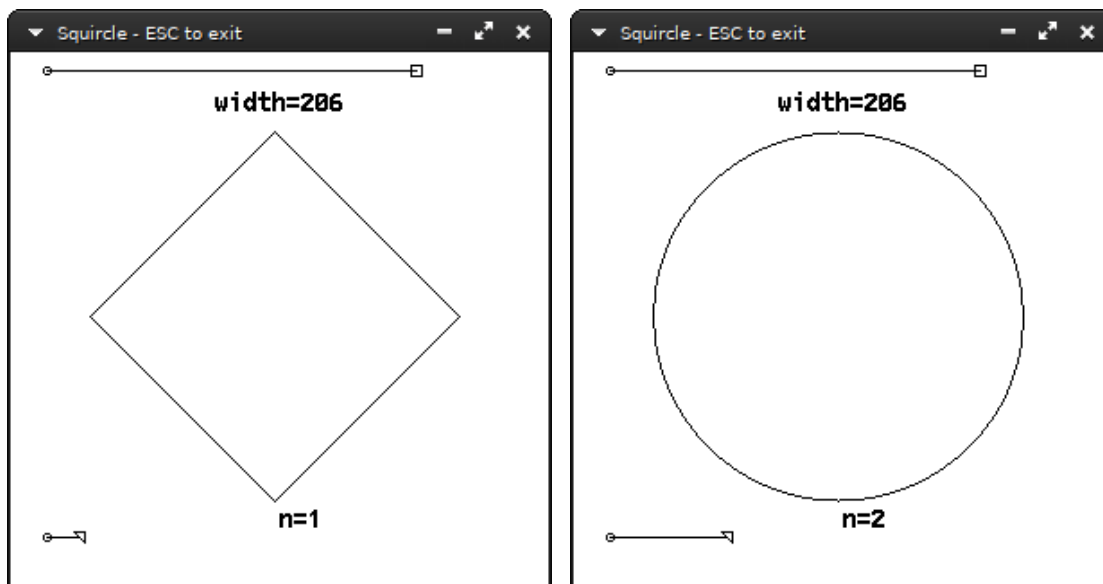

addendum

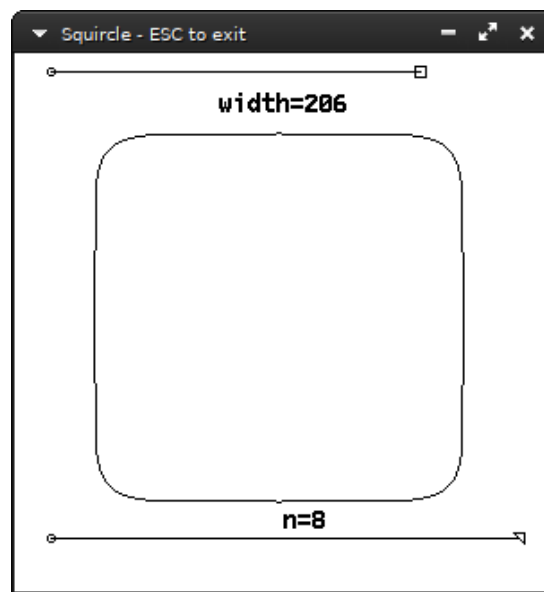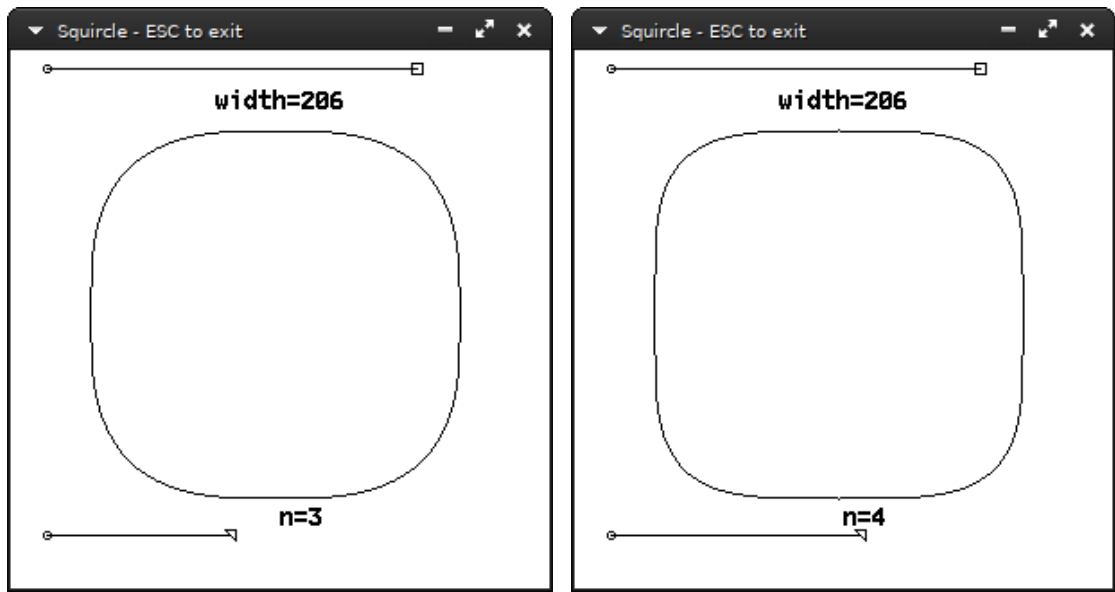

addendum

Chapter 44

Faster line clipping

Add *Faster line clipping*



Chapter 45

Archimedean spiral



The code



addendum

src/bin/archimedean_spiral.rs:



This code file is a PDF attachment

```


pub fn arch(image: &mut Image, center: Point) {
    let a = 1.0_f64;
    let b = 9.0_f64;

    // max_angle = number of spirals * 2pi.
    let max_angle = 5.0_f64 * 2.0_f64 * std::f64::consts::PI;

    let mut theta = 0.0_f64;
    let (dx, dy) = center;
    let mut prev_point = center;
    while theta < max_angle {
        theta = theta + 0.002_f64;

        let r = a + b * theta;
        let x = (r * theta.cos()) as i64 + dx;
        let y = (r * theta.sin()) as i64 + dy;
        image.plot_line_width(prev_point, (x, y), 1.0);
        prev_point = (x, y);
    }
}

```

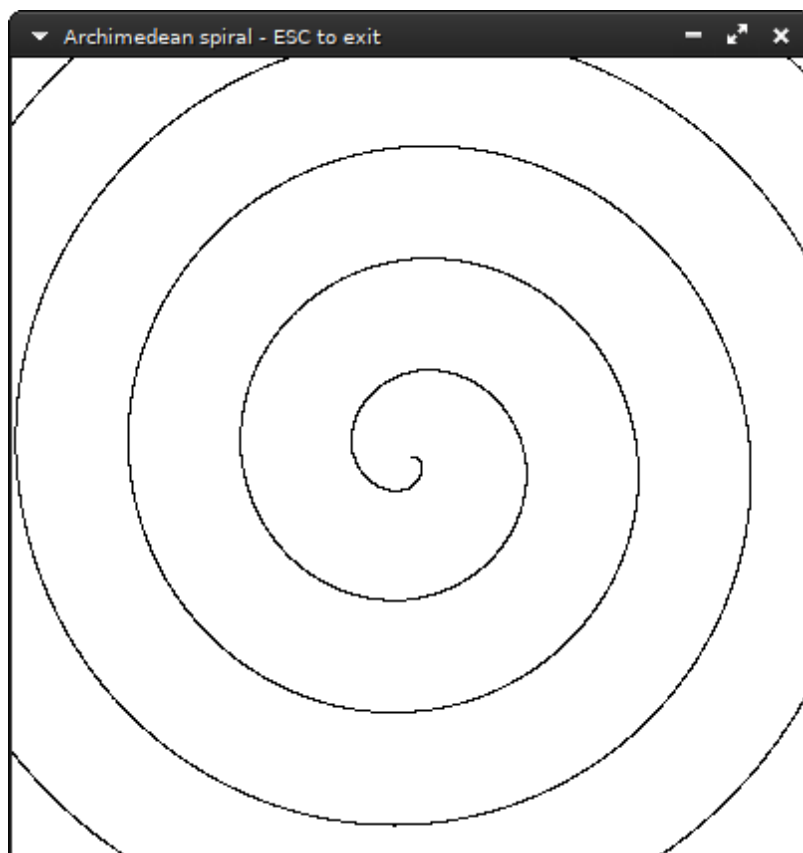


Chapter 46


Tilings

46.1 Truchet Tiling

Truchet tiling is a repetition of four specific tiles in any specific order. It can be random or deterministic.

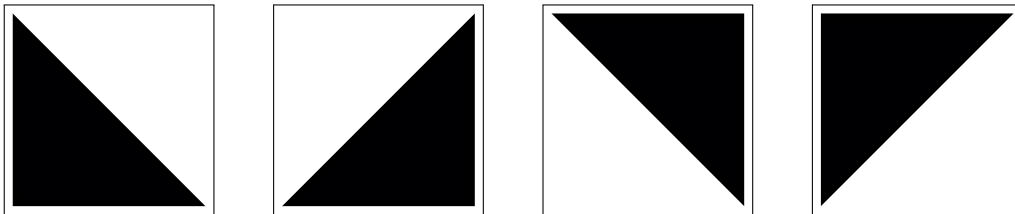

The four tiles

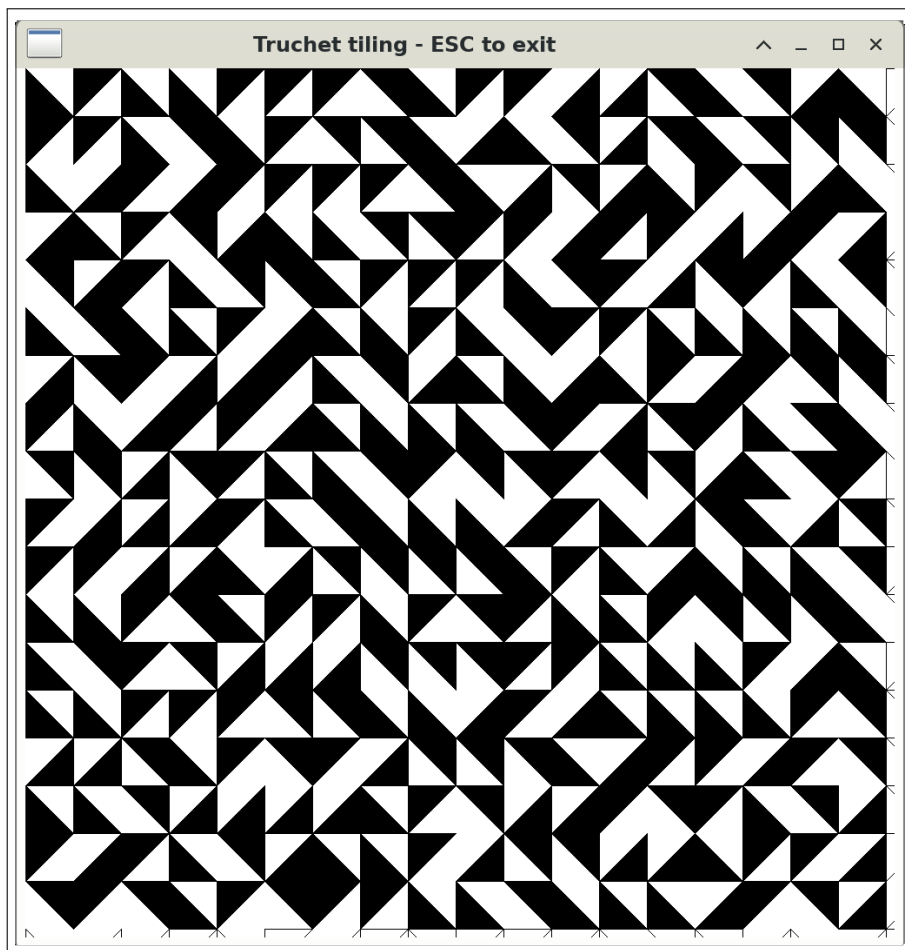

Random arrangement of truchet tiles using rand.

The code

src/bin/floyddither.rs:




This code file is a PDF attachment

```
fn truchet(image: &mut Image, size: i64) {
    let mut x = 0;
    let mut y = 0;
    #[repr(u8)]
    enum Tile {
        A = 0,
        B,
        C,
        D,
    }
    let tiles = [Tile::A, Tile::B, Tile::C, Tile::D];
    let width = image.width as i64;
    let height = image.height as i64;
    let mut rng = thread_rng();
    while y < height {
        while x < width {
            let t = tiles.choose(&mut rng).unwrap();
            let (a, b, c) = match t {
                Tile::A => {
                    let a = (x, y + size);
                    let b = (x + size, y + size);
                    let c = (x + size, y);
                    (a, b, c)
                }
                Tile::B => {
                    let a = (x, y);
                    let b = (x, y + size);
                    let c = (x + size, y + size);
                    (a, b, c)
                }
                Tile::C => {
                    let a = (x, y);
                    let b = (x + size, y);
                    let c = (x, y + size);
                    (a, b, c)
                }
                Tile::D => {
                    let a = (x, y);
                    let b = (x + size, y);
                    let c = (x + size, y + size);
                    (a, b, c)
                }
            };
            image.plot_line_width(a, b, 1.);
            image.plot_line_width(b, c, 1.);
            image.plot_line_width(c, a, 1.);
            let c = ((a.0 + b.0 + c.0) / 3, (a.1 + b.1 + c.1) / 3);
            image.flood_fill(c.0, c.1);
            x += size;
        }
        x = 0;
        y += size;
    }
}
```

46.2 Pythagorean Tiling

Pythagorean tiling consists of two squares, one filled and one blank and is described by the ratio of their sizes.

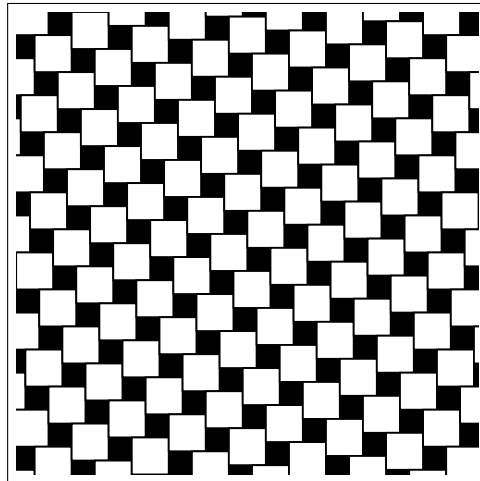

Pythagorean tiling using the golden ratio $\phi \equiv \frac{1+\sqrt{5}}{2}$

The code

```
fn pythagorean(image: &mut Image, size_a: i64, size_b: i64) {
    let width = image.width as i64;
    let height = image.height as i64;
    let times = 4 * width / (size_a + size_b);
    for i in -times..times {
        let mut x = -width + i * (size_b - size_a);
        let mut y = -height - i * (size_b + size_a);
        while y < 2 * height && x < 2 * width {
            // Draw the first smaller and filled rectangle
            let a = (x, y);
            let b = (x + size_a, y);
            let c = (x + size_a, y + size_a);
            let d = (x, y + size_a);
            image.plot_line_width(a, b, 0.);
            image.plot_line_width(b, c, 0.);
            image.plot_line_width(c, d, 0.);
            image.plot_line_width(d, a, 0.);
            // Calculate the center point of the rectangle in order to start flood
            ↪ filling from it
            let (cx, cy) = ((a.0 + b.0 + c.0 + d.0) / 4, (a.1 + b.1 + c.1 + d.1) / 4);
            image.flood_fill(cx, cy);
            x += size_a;
            // Draw the second bigger rectangle
            let a = b;
            let b = (a.0 + size_b, y);
            let c = (a.0 + size_b, y + size_b);
            let d = (a.0, y + size_b);
            image.plot_line_width(a, b, 1.);
            image.plot_line_width(b, c, 1.);
            image.plot_line_width(c, d, 1.);
```


src/bin/pythagorean.rs:



This code file is a PDF attachment

addendum

```
        image.plot_line_width(d, a, 1.);  
        y += size_b;  
    }  
}
```

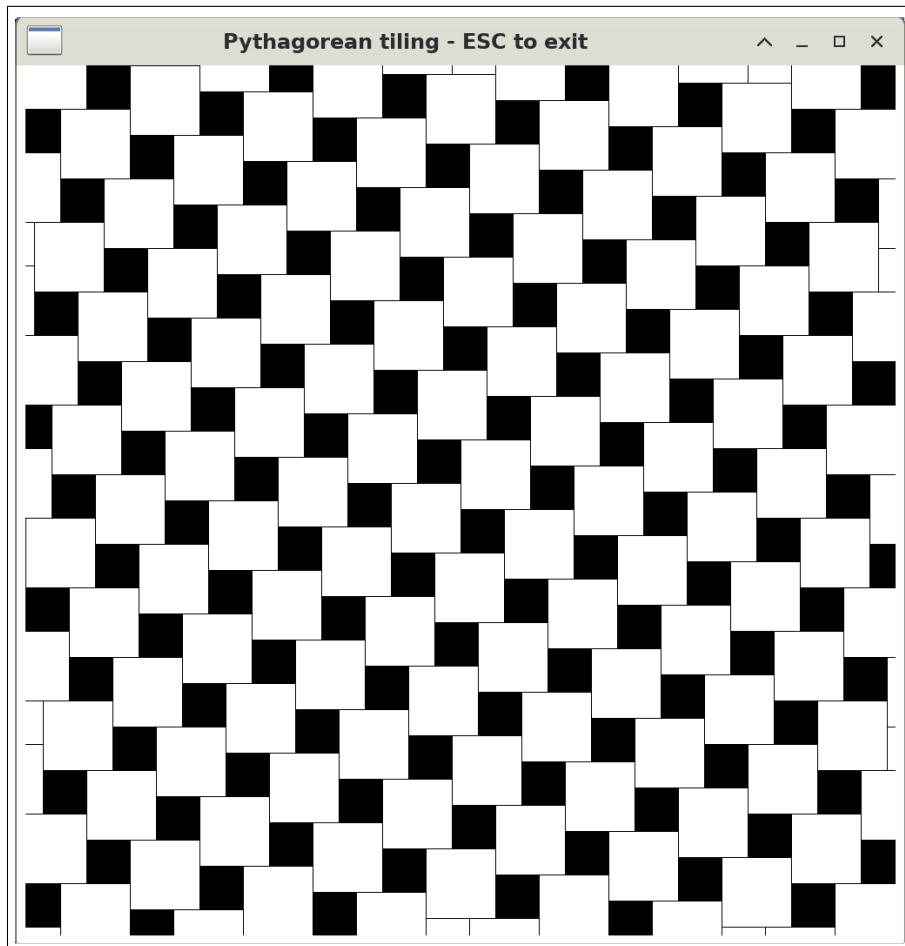

The output of `src/bin/pythagorean.rs`

46.3 Hexagon tiling

Chapter 47


Space-filling Curves

Add Space-filling Curves



47.1 Hilbert curve

Add Hilbert curve explanation

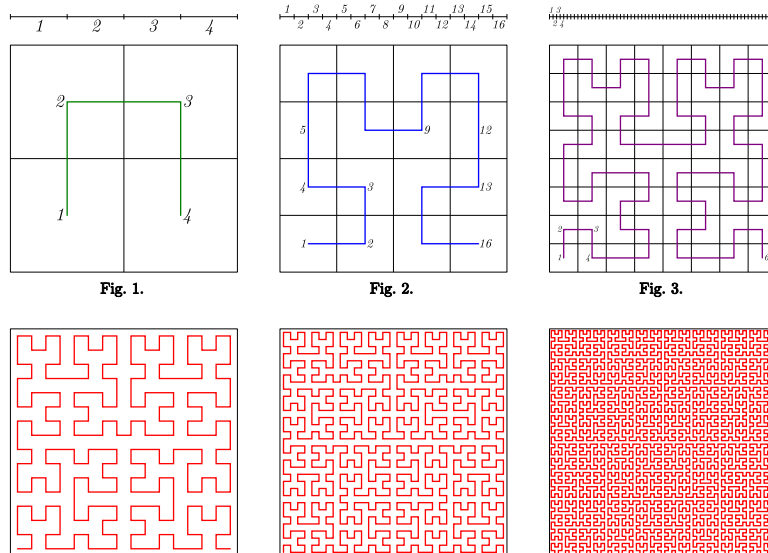

The first six iterations of the Hilbert curve by [Braindrain0000](#)

Here's a simple algorithm for drawing a Hilbert curve.*

```
const HILBERT: &[usize] = &[
    &[22, 10, 16, 38],
    &[10, 22, 24, 48],
    &[44, 36, 30, 18],
    &[36, 44, 42, 28],
];

fn curve(img: &mut Image, k: usize, order: i64, mut x: i64, mut y: i64) -> (i64, i64) {
    const STEP_SIZE: i64 = 5;
    let mut row: usize;
    let mut direction: usize;
    if order > 0 {
        for j in 0..4 {
            let step = HILBERT[k][j];
            row = (step / 10) - 1;
            let (xn, yn) = curve(img, row, order - 1, x, y);
            x = xn;
            y = yn;
            direction = step % 10;
            let prev = (x, y);
            match direction {
                8 => {
                    // null op
                }
                2 => {
                    //N
                    y -= STEP_SIZE;
                }
                1 => {
```

src/bin/hilbert.rs:



This code file is a PDF attachment

addendum

*Griffiths, J. G. (1985). *Table-driven algorithms for generating space-filling curves*. Computer-Aided Design, 17(1), 37–41. doi:10.1016/0010-4485(85)90009-0

```


        // NE
        y -= STEP_SIZE;
        x += STEP_SIZE;
    }
    0 => {
        //E
        x += STEP_SIZE;
    }
    7 => {
        //SE
        x += STEP_SIZE;
        y += STEP_SIZE;
    }
    6 => {
        //S
        y += STEP_SIZE;
    }
    5 => {
        //SW
        y += STEP_SIZE;
        x -= STEP_SIZE;
    }
    4 => {
        //W
        x -= STEP_SIZE;
    }
    3 => {
        //NW
        y -= STEP_SIZE;
        x -= STEP_SIZE;
    }
    other => unreachable!("{}", other),
}
img.plot_line_width(prev, (x, y), 0.);
}
}
(x, y)
}

```


```

let mut image = Image::new(WINDOW_WIDTH, WINDOW_WIDTH, 0, 0);
curve(&mut image, 0, 7, 0, WINDOW_WIDTH as i64);

```

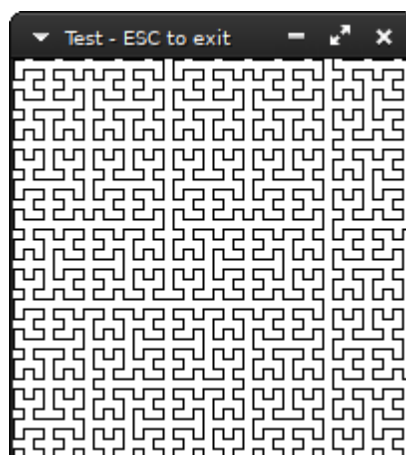

47.2 Sierpiński curve

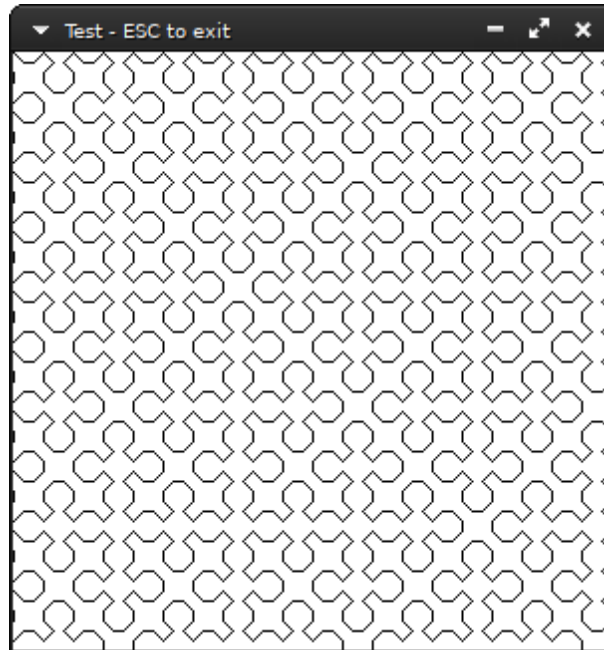

Switching the table from the Hilbert implementation to this:

```
const SIERP: &[[usize]] = &[
    &[17, 25, 33, 41],
    &[17, 20, 41, 18],
    &[25, 36, 17, 28],
    &[33, 44, 25, 38],
    &[41, 12, 33, 48],
];
```

And switching two lines from the function to

```
- let step = HILBERT[k][j];
- row = (step / 10) - 1;
+ let step = SIERP[k][j];
+ row = (step / 10);
```


You can draw a Sierpinshi curve of order n by calling `curve(&mut image, 0, n+1, 0, 0)`.

47.3 Peano curve


Add Peano curve

addendum

47.4 Z-order curve

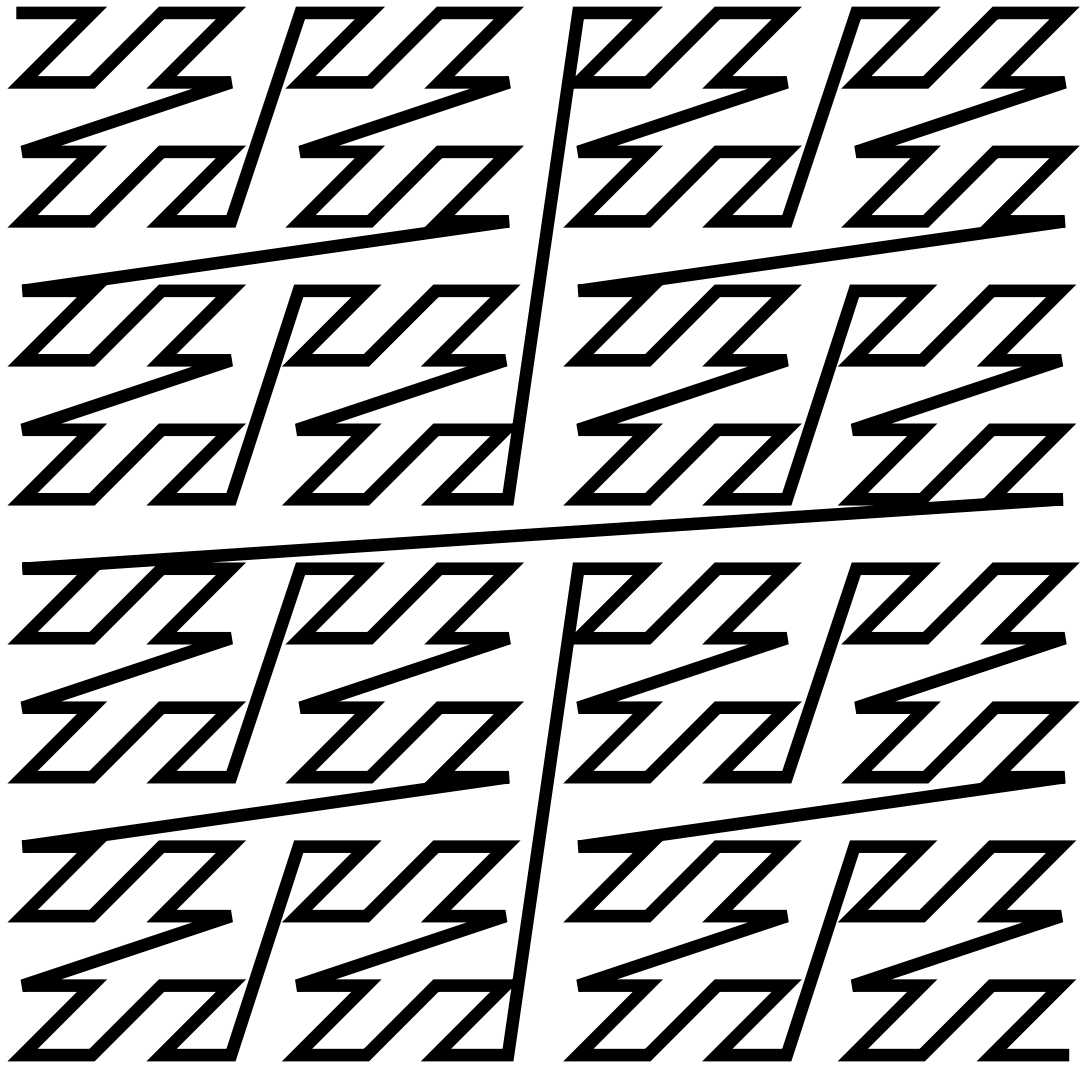

Drawing the Z-order curve is really simple: first, have a counter variable that starts from zero and is incremented by one at each step. Then, you extract the (x,y) coordinates the new step represents from its binary representation. The bits for the x coordinate are located at the odd bits, and for y at the even bits. I.e. the values are interleaved as bits in the value of the step:

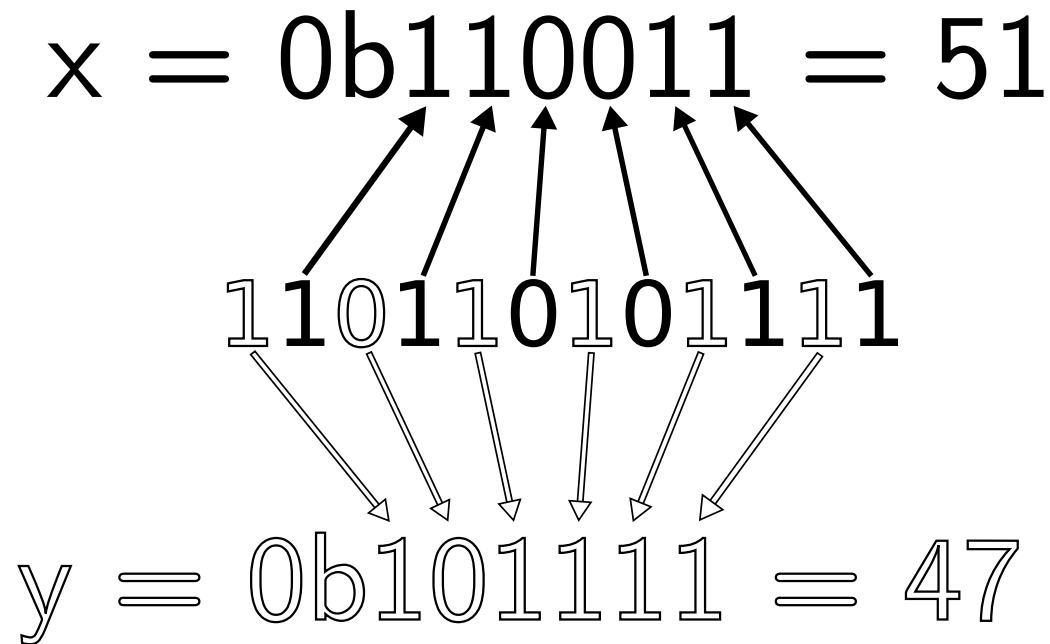

Knowing this, implementing the drawing process will consist of computing the next step, drawing a line segment from the current step and the next, set the current step as the next and continue;

```


fn zcurve(img: &mut Image, x_offset: i64, y_offset: i64) {
    const STEP_SIZE: i64 = 8;
    let mut sx: i64 = 0;
    let mut sy: i64 = 0;
    let mut b: u64 = 0;
    let mut prev_pos = (sx + x_offset, sy + y_offset);
    loop {
        let next = b + 1;
        sx = 0;
        if (next & 1) as i64 > 0 {
            sx += STEP_SIZE;
        }
        if next & 0b100 > 0 {
            sx += 2 * STEP_SIZE;
        }
        if next & 0b10_000 > 0 {
            sx += 4 * STEP_SIZE;
        }
        if next & 0b1_000_000 > 0 {
            sx += 8 * STEP_SIZE;
        }
        if next & 0b100_000_000 > 0 {
            sx += 16 * STEP_SIZE;
        }
        if next & 0b10_000_000_000 > 0 {
            sx += 32 * STEP_SIZE;
        }
        if next & 0b1_000_000_000_000 > 0 {
            sx += 64 * STEP_SIZE;
        }
        if next & 0b100_000_000_000_000 > 0 {
            sx += 128 * STEP_SIZE;
        }
    }
}

```


```

    }
    if next & 0b10_000_000_000_000_000 > 0 {
        sx += 256 * STEP_SIZE;
    }
    if next & 0b1_000_000_000_000_000_000 > 0 {
        sx += 512 * STEP_SIZE;
    }
    sy = 0;
    if (next & 0b10) as i64 > 0 {
        sy += STEP_SIZE;
    }
    if next & 0b1_000 > 0 {
        sy += 2 * STEP_SIZE;
    }
    if next & 0b100_000 > 0 {
        sy += 4 * STEP_SIZE;
    }
    if next & 0b10_000_000 > 0 {
        sy += 8 * STEP_SIZE;
    }
    if next & 0b1_000_000_000 > 0 {
        sy += 16 * STEP_SIZE;
    }
    if next & 0b100_000_000_000 > 0 {
        sy += 32 * STEP_SIZE;
    }
    if next & 0b10_000_000_000_000 > 0 {
        sy += 64 * STEP_SIZE;
    }
    if next & 0b1_000_000_000_000_000 > 0 {
        sy += 128 * STEP_SIZE;
    }
    if next & 0b100_000_000_000_000_000 > 0 {
        sy += 256 * STEP_SIZE;
    }
    if next & 0b10_000_000_000_000_000_000 > 0 {
        sy += 512 * STEP_SIZE;
    }
    img.plot_line_width(prev_pos, (sx + x_offset, sy + y_offset), 1.0);
    if next == 0b111_111_111_111_111_111_111 {
        break;
    }
    if sx as usize > img.width && sy as usize > img.height {
        break;
    }
    prev_pos = (sx + x_offset, sy + y_offset);
    b = next;
}
}

```

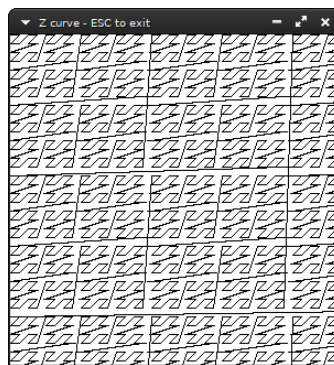

47.5 Flowsnake curve

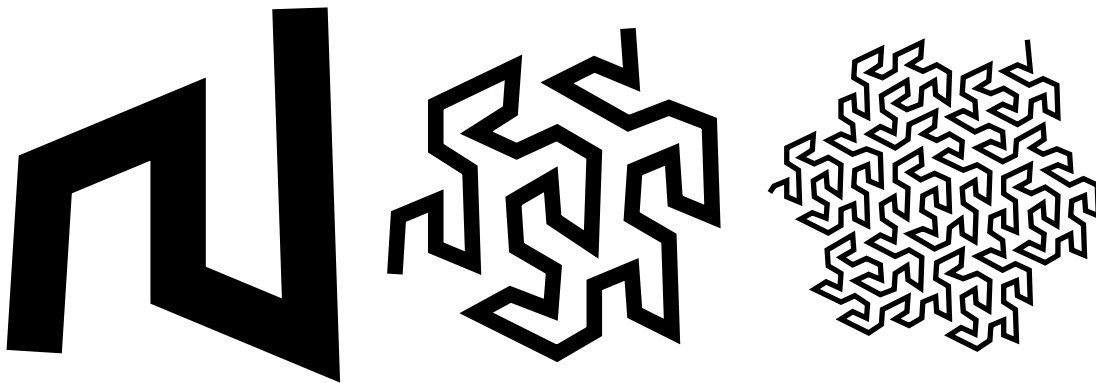


The first three orders of the Gosper curve.

As a fractal curve, the *flowsnake curve* or *Gosper curve* is defined by a set of recursive rules for drawing it. There are four kind of rules and two of them define rulesets (i.e. they are non-terminal steps).

$$A \mapsto A-B--B+A++AA+B-$$

$$B \mapsto +A-BB--B-A++A+B$$



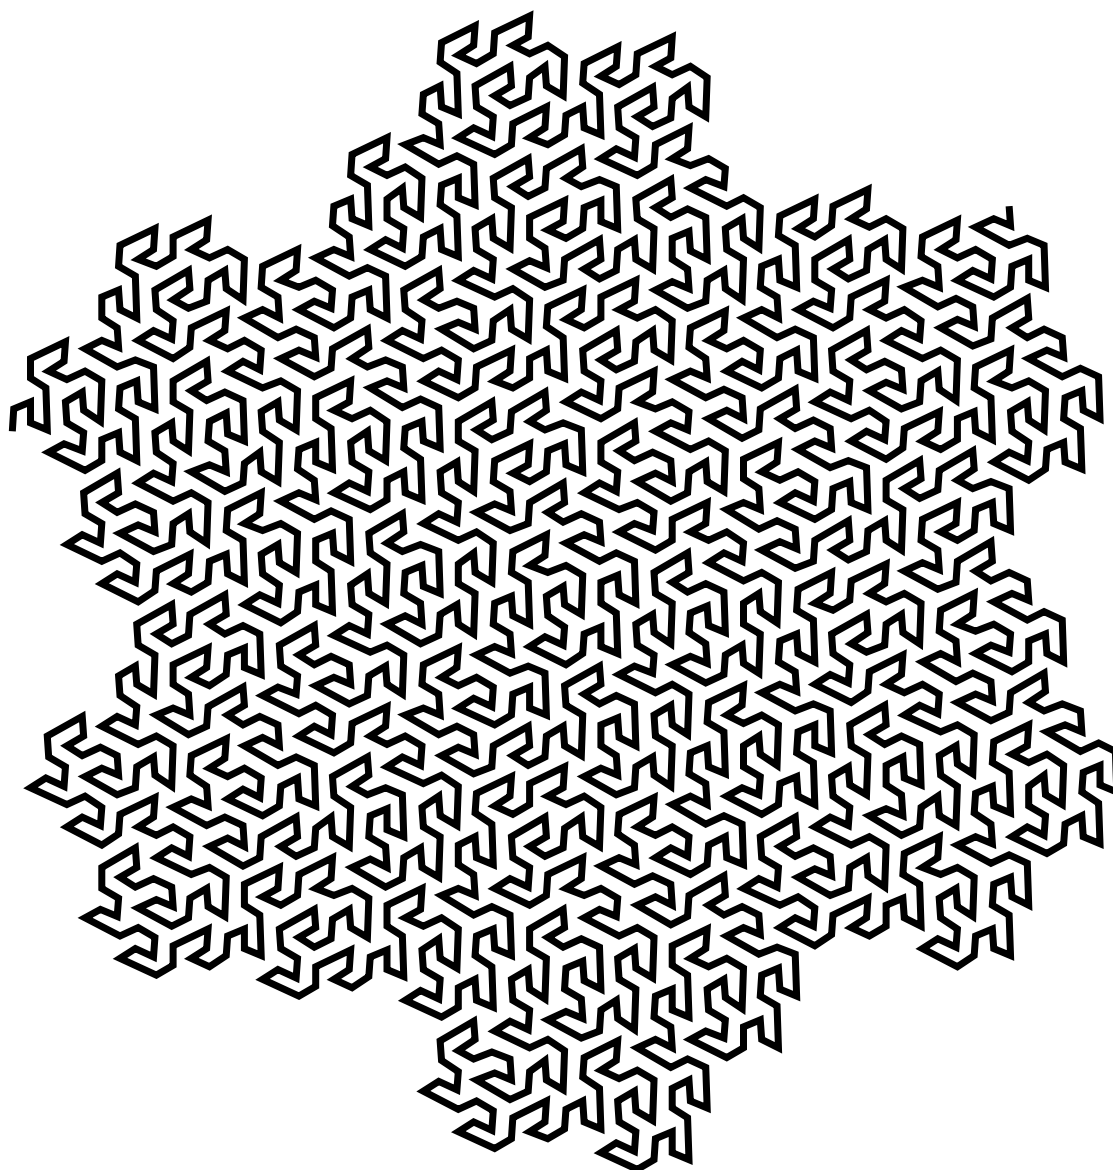


The fourth order Gosper curve consists of a minimum of 2057 distinct line segments (but our algorithm draws 36015)

Chapter 48

Dithering

48.1 Floyd-Steinberg

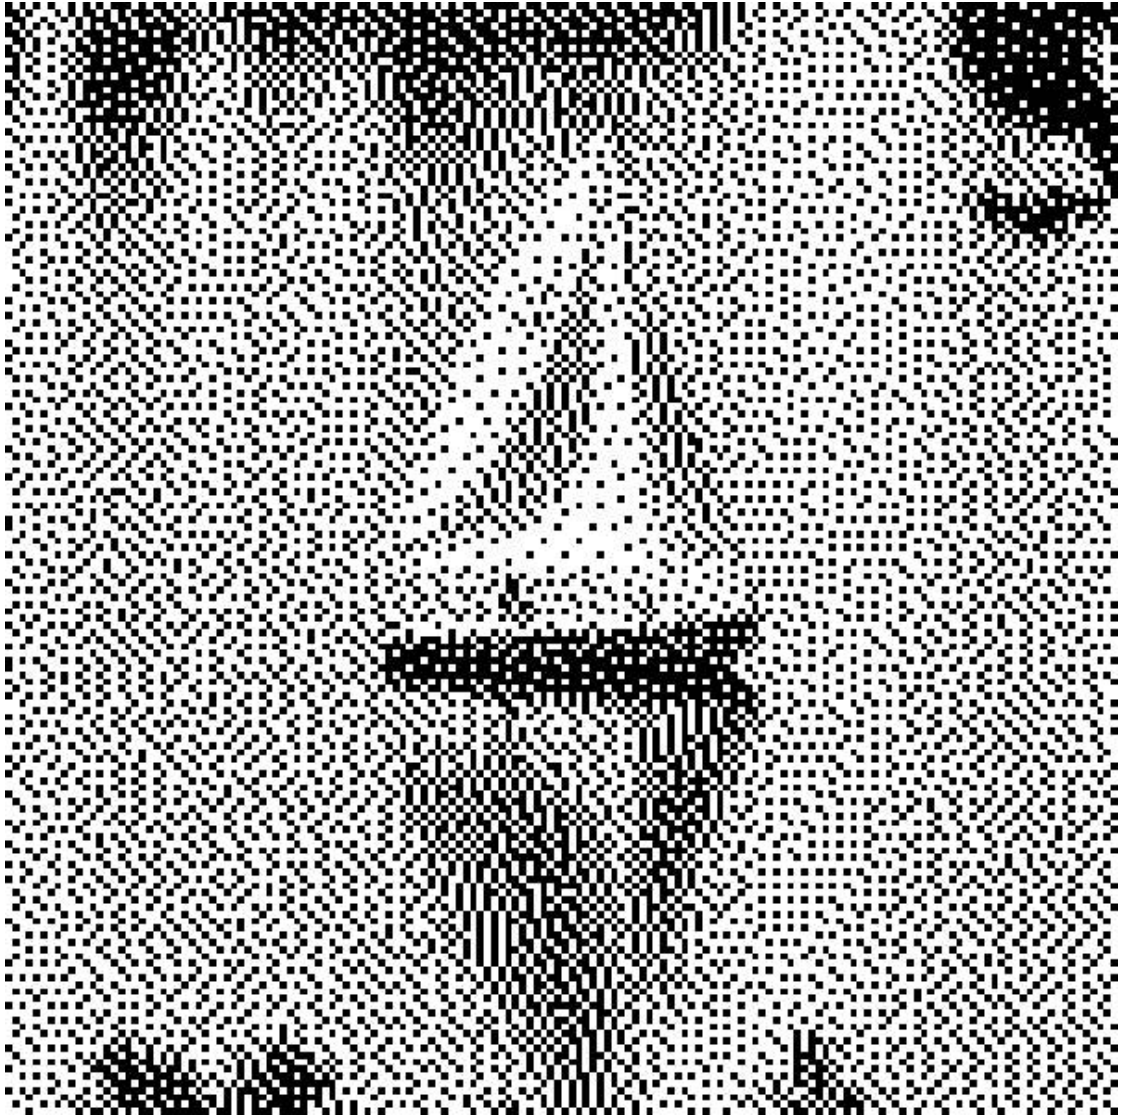

detail of a standard test image, [*Sailboat on lake*](#), with Floyd-Steinberg dithering


```



fn floyd(image: &mut Image) {
    let w = image.width;
    let m = [(0, 7), (w - 2, 3), (w - 1, 5), (w, 1)];
    let mut e = vec![0.0; w + 1];
    let bytes = image
        .bytes
        .iter()
        .map(|&byte| {
            let (r, g, b) = from_u32_rgb(byte);
            let g: f64 = (0.299 * (r as f64)) + (0.587_f64 * (g as f64)) + (0.114 * (b as
↪ f64));
            let pix = g / 255.0 + {
                e.push(0.);
                e.remove(0)
            };
            let col = if pix > 0.5 { 1. } else { 0. };
            let err = (pix - col) / 16.;
            for (x, y) in m.iter() {
                e[*x] += err * (*y as f64);
            }
            if col.floor() as u32 == 1 {
                WHITE
            } else {
                BLACK
            }
        })
        .collect::<Vec<u32>>();
    image.bytes = bytes;
}

```

src/bin/floyd_dither.rs:




This code file is a PDF attachment

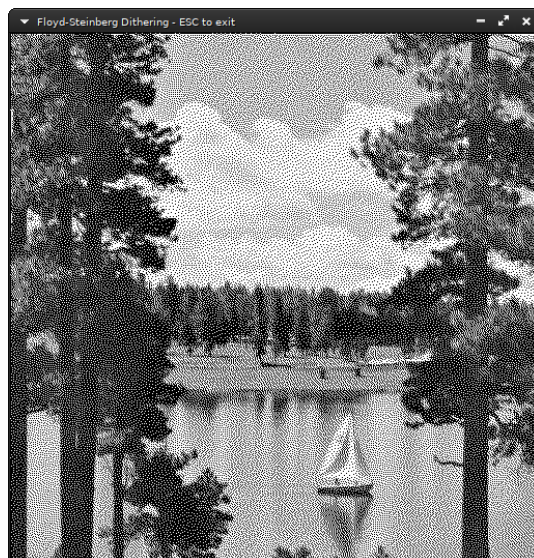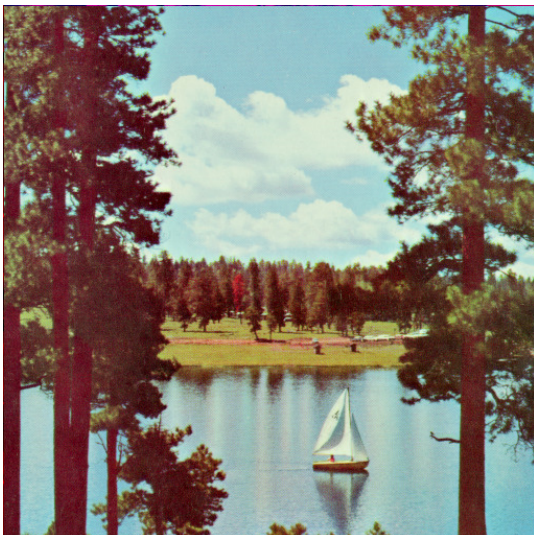

addendum

48.2 Atkinson dithering

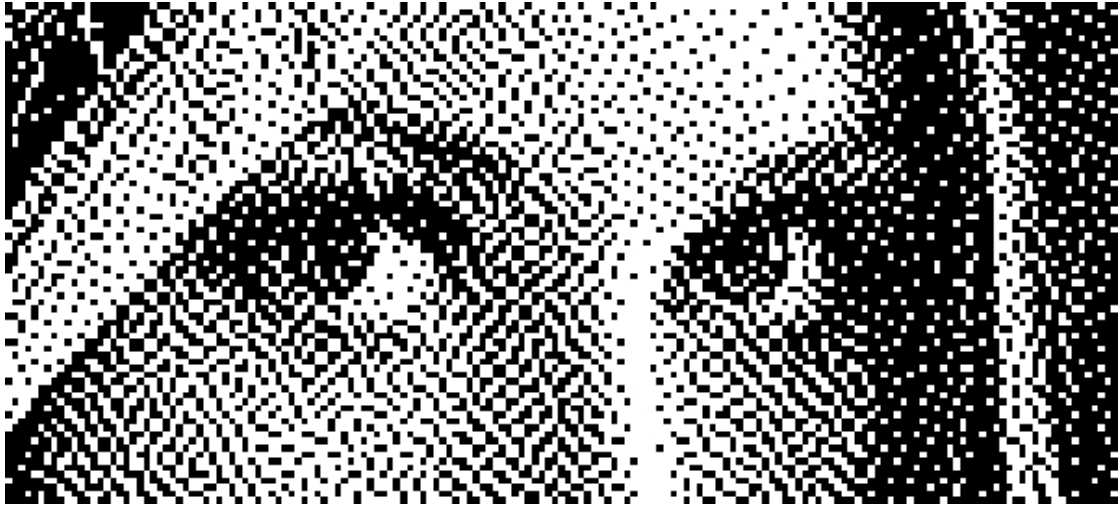

detail of a standard test image, *Lenna*, with Atkinson dithering



The following code implements Atkinson dithering:*

```
fn atkinson(image: &mut Image) {  
    let w= image.width;  
    let mut e = vec![0.0;2*w];  
    let m = [0, 1, w-2, w-1, w, 2*w-1];  
    for byte in image.bytes.iter_mut() {  
        let (r,g,b) = from_u32_rgb(*byte);  
        let g:f64 = ((0.299*(r as f64)) ) + ((0.587_f64*(g as f64)) ) + ((0.114*(b as  
↪ f64)) );  
        let pix = g/255.0 + { e.push(0.); e.remove(0)};  
        let col = if pix > 0.5 { 1. } else { 0. };  
        let err = (pix-col)/8.;  
        for m in m.iter() {  
            e[*m] += err;  
        }  
        *byte = if (col.floor() as u32 == 1) {  
            WHITE  
        }  
    }  
}
```

*Algorithm taken from <https://beyondloom.com/blog/dither.html>

src/bin/atkinsondither.rs:



This code file is a PDF
attachment

adden-
dum

```
    } else {  
      BLACK  
    };  
  }  
}
```



Chapter 49

Marching squares



Index

- alpha channel, 92
- angle
 - between two lines, 30
 - bisectioning, 39
 - trisectioning, 39
- area filling, *see* flood filling
- Atkinson dithering, 122
- bucket filling, *see* flood filling
- centroid
 - polygon, 60
 - rectangle, 77
- circle
 - bounding, 51
 - equations, 50
 - out of three points, 52
 - out of two points, 52
- contour, *see* marching squares
- curves
 - Bézier, 68
 - cubic, 73
 - quadratic, 69
 - weighted, 73
 - elliptical, 66
 - Flowsnake curve, 117
 - Hilbert curve, 111
 - Peano curve, 113
 - space-filling, 110
- de Casteljau's algorithm, 69
- distance
 - between two points, 20
 - moving a point, 21
 - point from a line, 26
- dithering, 119
 - Atkinson, 122
 - Floyd-Steinberg, 120
- equidistant line, 34
- flood filling, 64
 - triangle filling, 62
- Flowsnake curve, 117
- Floyd-Steinberg dithering, 120
- Gosper curve, *see* Flowsnake curve
- hexagon tiling, 109
- Hilbert curve, 111
- line
 - drawing, 25
 - equations, 22
 - equidistant, 34
 - intersection, 32
 - perpendicular, 28
 - reflection of point, 36
 - through point and slope, 22
 - through two points, 23
- magnification, 81
- marching squares, 124
- midpoint, 34, 95
- mirroring, 84
 - point to line, 36

- Peano curve, 113
- perpendicular, 28
- point
 - reflection on line, 36
- polygon
 - boolean operations, 59
 - centroid, 60
 - clipping, 61
- Pythagorean tiling, 107
- reflection of point, 36
- rotation, 75
- scaling, 81
- shearing, 85
- skewing, *see* shearing
- smoothing, 82
- stretching, 82
- tiling, 104
 - hexagon, 109
 - Pythagorean, 107
 - Truchet, 105
- triangle, 58
 - filling, 62
 - from point and angles, 58
- Truchet tiling, 105

About this text

The text has been typeset in \LaTeX using the book class and:

- **Redaction** for the main text.
- **Fira Sans** for referring to the programming language **Rust**.
- **Redaction20** for referring to the words bitmap and pixels as a concept.

Todo list

Add <i>Normal to a line through a point</i>	38
Add some explanation behind the algorithm in <i>Drawing a line segment from its two endpoints</i>	43
Add <i>Equations of a circle</i>	50
Add <i>Union, intersection and difference of polygons</i>	59
Add <i>Centroid of polygon</i>	60
Add <i>Triangle filling</i> explanation	62
Add <i>Flood filling</i>	64
Add <i>Fast 2D Rotation</i>	79
Add <i>90° Rotation of a bitmap by parallel recursive subdivision</i>	80
Add <i>Smoothing enlarged bitmaps</i>	82
Add <i>Stretching lines of bitmaps</i>	82
Add screenshots and figure and code in <i>Mirroring</i>	84
Add <i>Projections</i>	88
Add <i>Faster drawing a line segment from its two endpoints using symmetry</i>	90
Add <i>Joining the ends of two wide line segments together</i>	91
Add <i>Composing monochrome bitmaps with separate alpha channel data</i>	92
Add <i>Orthogonal connection of two points</i>	93
Add <i>Faster line clipping</i>	101
Add <i>Space-filling Curves</i>	110
Add <i>Hilbert curve</i> explanation	111
Add <i>Peano curve</i>	113