

Categorical Composition

EdgeBasedModels.jl Vignette 12

Simon Frost

2026-05-14

Table of contents

Introduction	1
Setup	2
Open systems and ports	2
Tensor product — independent populations	3
Composition via wiring — current limitations	8
Stratification — age-structured populations	9
Natural transformations — EBCM to mass-action	12
Functor and functoriality	14
Verifying functoriality	15
Simulation validation	16
Summary	18

Introduction

Epidemiological models are often built by combining simpler pieces — two populations coupled by travel, or a base model stratified by age. Categorical composition gives this idea a formal algebraic backbone. Each submodel is an *open system* with typed *ports* that can be wired together. The wiring determines how infection pressure flows between components, and a *functor* maps the resulting network description to a concrete ODE system.

Key benefits:

1. Composability — build complex multi-population models from reusable parts.
2. Formal guarantees — the functor preserves composition, so the combined ODE faithfully represents the wired network.
3. Natural transformations — relate EBCM network models to simpler mass-action approximations and quantify the difference.

Setup

```
using EdgeBasedModels
using ModelingToolkit
using OrdinaryDiffEq
using Plots
```

Open systems and ports

An OpenEBCM wraps an edge-based compartmental model together with named ports — typed boundary interfaces through which systems can interact. Convenience constructors `open_sir` and `open_seir` create open systems directly from a PGF and rate parameters.

```
pgf_a = poisson_pgf(5.0)
m_sir = open_sir(pgf_a, 0.3, 0.1; name = :pop_a)
```

```
OpenEBCM(:pop_a, StaticConfigurationModel(DegreePGF(z, exp(5.0*(-1 + z))), DiseaseProgressionModel))
```

Each port has a name and a type (`:susceptible`, `:infectious`, or `:recovered`):

```
for p in m_sir.ports
    println(" Port $(p.name) — type $(p.type)")
end
```

```
Port S — type susceptible
Port I — type infectious
Port R — type recovered
```

An SEIR model has four ports (S, E, I, R), where the exposed and recovered stages are both non-infectious:

```
m_seir = open_seir(pgf_a, 0.2, 0.3, 0.1; name = :seir)
println("SEIR ports: ", length(m_seir.ports))
for p in m_seir.ports
    println(" Port $(p.name) — type $(p.type)")
end
```

SEIR ports: 4

Port S – type susceptible

Port E – type latent

Port I – type infectious

Port R – type recovered

Tensor product — independent populations

The tensor product $m_1 \otimes m_2$ places two open systems side by side with no interaction. Each component evolves independently, giving block-diagonal dynamics.

```
pgf_b = poisson_pgf(3.0)
m1 = open_sir(pgf_a, 0.3, 0.1; name = :pop_a)
m2 = open_sir(pgf_b, 0.2, 0.1; name = :pop_b)

tp = tensor(m1, m2)
println("Tensor product ports: ", length(tp.ports))
```

Tensor product ports: 6

Build the ODE system and solve:

```
sys_tp = build_edge_system(tp.model)
ic_tp = default_initial_conditions(sys_tp)
prob_tp = ODEProblem(sys_tp.system, ic_tp, (0.0, 80.0))
sol_tp = solve(prob_tp; abstol = 1e-8, reltol = 1e-8)
```

retcode: Success

Interpolation: 3rd order Hermite

t: 59-element Vector{Float64}:

0.0

0.10727110776953308

0.3652049129865391

0.6942629719274616

1.047066555061856

1.4378112327765944

1.845990123008631

2.2714120773240487

2.7069156957882394

3.1565216068570168

49.650148014932604
 52.74538938238149
 56.08153446485713
 59.627998723142305
 63.47700300633278
 67.6767549375804
 72.2788404578111
 77.2428984216221
 80.0
 u: 59-element Vector{Vector{Float64}}:
 [0.0, 0.001, 0.0, 0.0010000000000000009, 1.0, 0.0, 0.001, 0.0, 0.0010000000000000009, 1.0]
 [1.1017122407082515e-5, 0.0010543226735000965, 1.0901223353620376e-
 5, 0.0010326361258463188, 0.9999781975532928, 1.1563616226468695e-5, 0.0011590209487017265,
 5, 0.001125045924768744, 0.9999658460198804]
 [3.995875977722658e-5, 0.0011913324449059316, 3.859158882244906e-5, 0.0011155164382158117,
 5, 0.0016258440317793552, 4.4929661072833806e-5, 0.0014933255040693134, 0.9998652110167815]
 [8.22228234857732e-5, 0.0013802056689779514, 7.716642518944634e-5, 0.0012309292168953862, 0.
 [0.00013476812398208757, 0.0016020294935233123, 0.00012296787758536408, 0.0013678939847493
 [0.0002025809971522291, 0.0018737444851435066, 0.00017966395014809526, 0.00153733363185145
 [0.0002854053081370352, 0.002190425279740242, 0.00024640003183099056, 0.001736630492384306
 [0.0003863154141068419, 0.0025608819783040997, 0.0003251747661767065, 0.001971673093880822
 [0.0005069668391785466, 0.002988601921694865, 0.00041686536710903993, 0.002244972659546292
 [0.0006523423443722197, 0.0034887754929356298, 0.0005248692796288734, 0.002566509998421229
 [0.7347625917019021, 0.060073738836281095, 0.2638244551624925, 0.003362965050705511, 0.4723
 7, 0.26941732389381406]
 [0.7509041442538028, 0.04491621080801845, 0.26462576006982597, 0.0019430748523431786, 0.470
 8, 0.26941723260650446]
 [0.7637434347613136, 0.032675221982348936, 0.26511485550316005, 0.001074090234182153, 0.469
 8, 0.26941720155023313]
 [0.773559422905268, 0.023203993504956937, 0.26539734039103163, 0.0005713952371298669, 0.469
 9, 0.2694171919505995]
 [0.7810091428640352, 0.015948292543740947, 0.2655565240568358, 0.00028786323726862485, 0.46
 9, 0.2694171891776721]
 [0.7864995960532367, 0.010561500367773107, 0.26564163550788156, 0.00013618989736500096, 0.4
 10, 0.26941718845985096]
 [0.7904068061921223, 0.006706354600778668, 0.265684399652459, 5.996183552390066e-
 5, 0.46863120069508185, 0.9727463105484989, 0.0013641051024152469, 0.2435276039012095, 4.607
 11, 0.26941718829637107]
 [0.7930366738723464, 0.004100530821848369, 0.26570415231049616, 2.4747762706208726e-
 5, 0.4685916953790075, 0.9732800649908587, 0.000830350664185349, 0.24352760391184414, 7.6673
 12, 0.26941718826446714]

```
[0.7940256579300172, 0.0031181076254110105, 0.265709542626418, 1.5137676174098225e-5, 0.46858091474716385, 0.9734801521836053, 0.000630263471958688, 0.2435276039131828, 2.832612, 0.26941718826045125]
```

We can also solve each population in isolation and confirm the tensor product does not alter trajectories:

```
sys_a = build_edge_system(m1.model)
ic_a = default_initial_conditions(sys_a)
sol_a = solve(ODEProblem(sys_a.system, ic_a, (0.0, 80.0))); abstol = 1e-8, reltol = 1e-8)

sys_b = build_edge_system(m2.model)
ic_b = default_initial_conditions(sys_b)
sol_b = solve(ODEProblem(sys_b.system, ic_b, (0.0, 80.0))); abstol = 1e-8, reltol = 1e-8)
```

retcode: Success

Interpolation: 3rd order Hermite

t: 40-element Vector{Float64}:

```
0.0
0.12047769762501717
0.7568962993519851
1.7927759397082332
2.9655086492825644
4.268582065041739
5.66670782518709
7.147132809239019
8.70580795889803
10.414075107267514
⋮
50.68467195079408
53.792749092686634
57.04407022601451
60.539301816531655
64.30628711675523
68.417663936223
72.90443065526266
77.729989314524
80.0
```

u: 40-element Vector{Vector{Float64}}:

```
[0.0, 0.001, 0.0, 0.0010000000000000009, 1.0]
 [1.2414006238649571e-5, 0.0010611157789729546, 1.2267682910422132e-5, 0.0010367267364803385, 0.9999754646341792]
```

```
[9.098575113679013e-5, 0.0014180677121343236, 8.494881627609888e-5, 0.0012542070144428176,
[0.00027386472282101167, 0.002147090622021336, 0.00023723171033557554, 0.00170926021383562,
[0.0005878249494948238, 0.0032684976728077283, 0.00047721284538967913, 0.00242468408613351,
[0.0011219247026160559, 0.0050380517680569245, 0.000863087844658239, 0.0035707129366982643,
[0.0020085985913259655, 0.007830973334526386, 0.0014813000147600622, 0.005395671881572165,
[0.0034748591526304207, 0.012288170927469364, 0.002481347916669295, 0.0083189863300919, 0.9
[0.005910233188820857, 0.01947641292684316, 0.004118991069961179, 0.01302967290578048, 0.99
[0.010207282111954272, 0.03175362537357181, 0.006977699188144182, 0.02102780992109353, 0.98
[
[0.7406868372979549, 0.054540467788720716, 0.2641423702535552, 0.002800194326009897, 0.4717
[0.7553823646791533, 0.040665371318949234, 0.26481146895250707, 0.0016133291405812206, 0.47
[0.766747480826728, 0.02978720692901414, 0.2652098742731783, 0.0009050649362069268, 0.46958
[0.7755831796297152, 0.02123884062488322, 0.26544540629253455, 0.0004858013769945267, 0.469
[0.7822794719733321, 0.014704996944492853, 0.26557871604747485, 0.00024832077540020597, 0.4
[0.7872542462339445, 0.009818359263151773, 0.2656510879461244, 0.0001193416587228538, 0.468
[0.7908136299626811, 0.0063038513819528895, 0.26568794908590115, 5.363408693040769e-
5, 0.46862410182819786]
[0.7932316544311875, 0.0039069552498477685, 0.26570530678040366, 2.2689339824149624e-
5, 0.4685893864391929]
[0.7940256575881501, 0.003118107626782065, 0.26570954251283285, 1.513767643355954e-
5, 0.4685809149743345]
```

```
# Extract  $S = \psi(\theta)$  for each population
κ_a, κ_b = 5.0, 3.0
ψ_a(x) = exp(κ_a * (x - 1))
ψ_b(x) = exp(κ_b * (x - 1))

# Tensor system
θ_a_tp = compartment(sol_tp, sys_tp, :θ_pop_a)
θ_b_tp = compartment(sol_tp, sys_tp, :θ_pop_b)
R_a_tp = compartment(sol_tp, sys_tp, :R_pop_a)
R_b_tp = compartment(sol_tp, sys_tp, :R_pop_b)
S_a_tp = ψ_a.(θ_a_tp)
S_b_tp = ψ_b.(θ_b_tp)
I_a_tp = 1.0 .- S_a_tp .- R_a_tp
I_b_tp = 1.0 .- S_b_tp .- R_b_tp

# Standalone systems
θ_a_solo = compartment(sol_a, sys_a, :θ)
R_a_solo = compartment(sol_a, sys_a, :R)
S_a_solo = ψ_a.(θ_a_solo)
I_a_solo = 1.0 .- S_a_solo .- R_a_solo
```

```

θ_b_solo = compartment(sol_b, sys_b, :θ)
R_b_solo = compartment(sol_b, sys_b, :R)
S_b_solo = ψ_b.(θ_b_solo)
I_b_solo = 1.0 .- S_b_solo .- R_b_solo

plot(sol_tp.t, I_a_tp, label = "Pop A (tensor)", lw = 3, color = :blue)
plot!(sol_tp.t, I_b_tp, label = "Pop B (tensor)", lw = 3, color = :red)
plot!(sol_a.t, I_a_solo, label = "Pop A (standalone)", lw = 2, ls = :dash, color = :blue)
plot!(sol_b.t, I_b_solo, label = "Pop B (standalone)", lw = 2, ls = :dash, color = :red)
xlabel!("Time")
ylabel!("Fraction infected")
title!("Tensor Product: Independent Populations")

```

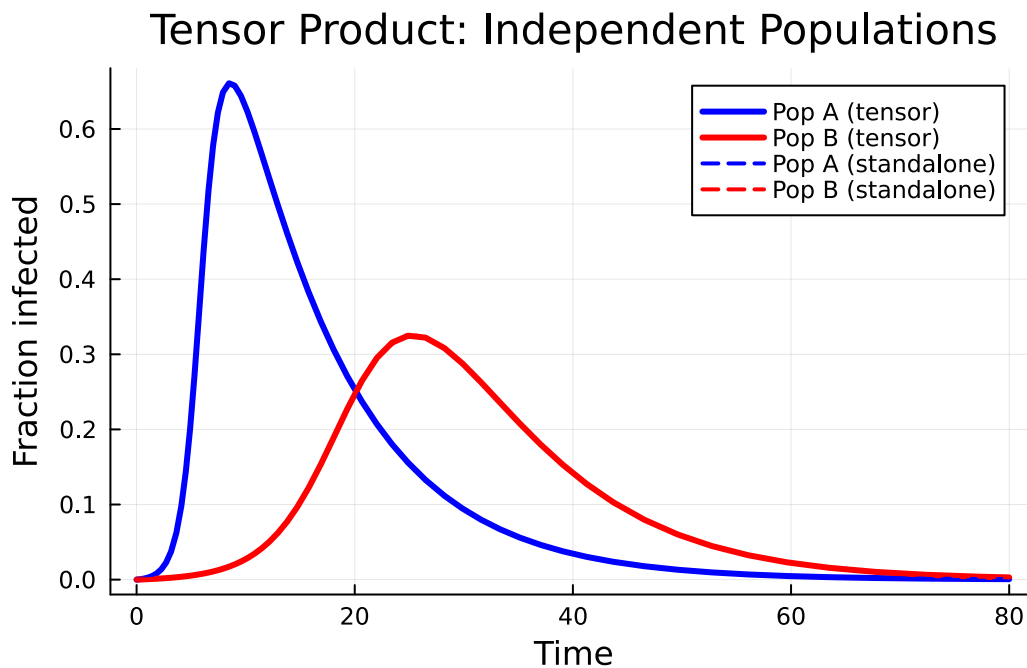


Figure 1: Tensor product: two independent SIR populations evolve without interaction.

The solid (tensor) and dashed (standalone) curves overlap perfectly — the tensor product preserves each component's dynamics.

Composition via wiring — current limitations

The `compose` combinator records port wiring at the categorical level, but `build_edge_system` does not yet emit a coupled ODE system from a `ComposedModel` whose wiring is non-empty: it raises an `ArgumentError` because injecting cross-system transmission pressure requires extra closure assumptions that have not been formalised in the package. The wiring metadata is still useful for bookkeeping and for downstream tools.

```
m_city = open_sir(pgf_a, 0.3, 0.1; name = :city)
m_rural = open_sir(pgf_b, 0.2, 0.1; name = :rural)

# Wire city's infectious port (I) to rural's susceptible port (S)
cp = EdgeBasedModels.compose(m_city, m_rural, [:I ⇒ :S])
println("Composed ports: ", length(cp.ports))
for p in cp.ports
    println("  Port $(p.name) – type $(p.type)")
end
```

```
Composed ports: 4
  Port city_S – type susceptible
  Port city_R – type recovered
  Port rural_I – type infectious
  Port rural_R – type recovered
```

Notice that the wired ports (:I from city, :S from rural) are consumed — only the remaining boundary ports appear.

```
# Confirm that wired composition is rejected by the ODE builder
try
    build_edge_system(cp.model)
catch err
    println(typeof(err), ": ", err.msg)
end
```

`ArgumentError: cross-system wiring is not yet supported by build_edge_system; use tensor( ... ) type models for coupled populations`

To couple two populations dynamically, use `stratify` (below) or build a `MultiTypeConfigurationModel` directly — both produce fully coupled ODE systems.

Stratification — age-structured populations

stratify crosses a base model with population strata. Given a base SIR on a Poisson network and a row-stochastic mixing matrix, it creates a MultiTypeConfigurationModel internally.

```
pgf_base = poisson_pgf(5.0)
base = open_sir(pgf_base, 0.3, 0.1; name = :base)

# Two age groups with assortative mixing
mixing = [0.7 0.3;
          0.3 0.7]
strat = stratify(base, [:young, :old], mixing)
println("Stratified ports: ", length(strat.ports))
```

Stratified ports: 6

```
sys_strat = build_edge_system(strat.model)
ic_strat = default_initial_conditions(sys_strat)
prob_strat = ODEProblem(sys_strat.system, ic_strat, (0.0, 80.0))
sol_strat = solve(prob_strat; abstol = 1e-8, reltol = 1e-8)
```

retcode: Success

Interpolation: 3rd order Hermite

t: 56-element Vector{Float64}:

```
0.0
0.10314357939403586
0.35113788635269233
0.6677259986061641
1.0074575590151282
1.3841208520908095
1.7779734771453213
2.1887267578642233
2.609020969844318
3.0412239029619603
⋮
44.905881444696526
48.63606356491767
52.68898397276162
57.04857572280902
61.75182725378137
66.81815835974737
```

```

72.28984464261507
78.21406908190617
80.0
u: 56-element Vector{Vector{Float64}}:
 [0.0, 0.001, 0.0, 0.001, 0.0, 0.0, 0.0, 0.0, 0.00100000000000000009, 0.00100000000000000009, 0.
   [1.1086562162678604e-5,    0.0011525563890368122,    1.1086562162678606e-
5,    0.0011525563890368122,    1.0921345049981857e-5,    1.0921345049981859e-
5, 1.0921345049981857e-5, 1.0921345049981855e-5, 0.0011199575709995642, 0.00111995757099956
   [4.493345072393726e-5,    0.0015968945366260602,    4.4933450723937257e-
5,    0.0015968945366260606,    4.284512869280496e-5,    4.284512869280497e-
5, 4.284512869280499e-5, 4.284512869280499e-5, 0.0014704474725787786, 0.0014704474725787784
   [0.00010699998484205036, 0.002368021827821315, 0.00010699998484205036, 0.00236802182782131
5, 9.85059605826207e-5, 9.850596058262072e-5, 9.850596058262071e-5, 0.0020809979703328833, 0
   [0.0002062905906978881, 0.0035495240128198546, 0.00020629059069788812, 0.00354952401281985
   [0.0003739264898809176, 0.0054824503487300325, 0.0003739264898809176, 0.005482450348730032
   [0.000645957297918704, 0.008547240029424003, 0.0006459572979187043, 0.008547240029424003, 0
   [0.001090755854284817, 0.01346836690206648, 0.0010907558542848177, 0.013468366902066483, 0.
   [0.0018090418262287724, 0.021283647956286296, 0.0018090418262287744, 0.0212836479562863, 0.
   [0.002979118153108979, 0.03377486983917972, 0.0029791181531089814, 0.033774869839179725, 0.
   ]
   [0.9530416268525741, 0.02106869147205639, 0.9530416268525742, 0.021068691472056377, 0.24352
7, 9.059524049100176e-7, 9.059524049100296e-7, 9.059524049100289e-7, 0.2694179407208312, 0.2
   [0.9596013215843769, 0.01450906882969041, 0.959601321584377, 0.014509068829690403, 0.243527
7,    2.3551139496959086e-7,    2.3551139496959718e-7,    2.3551139496959665e-
7, 0.2694173838229961, 0.2694173838229963, 0.26941738382299607, 0.269417383822996]
   [0.9644360078990994, 0.009674401979757353, 0.9644360078990996, 0.009674401979757349, 0.2435
8,    5.448600147177886e-8,    5.448600147177993e-8,    5.4486001471779345e-
8, 0.2694172334553589, 0.26941723345535906, 0.26941723345535884, 0.2694172334553588]
   [0.9678545157603684, 0.0062558987638800245, 0.9678545157603685, 0.006255898763880021, 0.243
8,    1.1283156013633789e-8,    1.1283156013633938e-8,    1.1283156013633918e-
8, 0.26941719756918103, 0.2694171975691812, 0.269417197569181, 0.2694171975691809]
   [0.9702017349792376, 0.003908680536353938, 0.9702017349792377, 0.003908680536353935, 0.2435
9,    2.0635140123153157e-9,    2.063514012315305e-9,    2.063514012315357e-
9, 0.2694171899109422, 0.2694171899109424, 0.26941718991094216, 0.2694171899109421]
   [0.9717553542842375, 0.0023550614176551603, 0.9717553542842376, 0.0023550614176551603, 0.24
10,    3.3088405533836776e-10,    3.3088405533836564e-10,    3.3088405533837795e-
10, 0.26941718847174384, 0.269417188471744, 0.2694171884717438, 0.26941718847174373]
   [0.9727478108848678, 0.0013626048476799114, 0.972747810884868, 0.0013626048476799114, 0.243
11,    4.578774170426576e-11,    4.578774170426449e-11,    4.5787741704267137e-
11, 0.2694171882349303, 0.2694171882349305, 0.26941718823493027, 0.2694171882349302]
   [0.9733569142129619, 0.0007535015239321396, 0.973356914212962, 0.0007535015239321396, 0.243
12,    5.366861006220617e-12,    5.36686100622044e-12,    5.3668610062207445e-
12, 0.26941718820135496, 0.26941718820135513, 0.2694171882013549, 0.26941718820135485]

```

```
[0.9734801522603547, 0.0006302634768136258, 0.9734801522603548, 0.0006302634768136258, 0.24
12, 2.8157435014229396e-12, 2.815743501422853e-12, 2.8157435014229993e-
12, 0.2694171881992359, 0.26941718819923605, 0.2694171881992358, 0.26941718819923577]
```

With $K = 2$ types and $M = 2$ stages (I, R), the multi-type system has $K^2(1 + M) + KM = 16$ equations:

```
n_eqs = length(ModelingToolkit.equations(sys_strat.system))
println("Number of equations: $n_eqs")
```

Number of equations: 16

```
R_young = compartment(sol_strat, sys_strat, :R_young)
R_old    = compartment(sol_strat, sys_strat, :R_old)

plot(sol_strat.t, R_young, label = "R (young)", lw = 2, color = :orange)
plot!(sol_strat.t, R_old, label = "R (old)", lw = 2, color = :purple)
xlabel!("Time")
ylabel!("Fraction recovered")
title!("Stratified SIR: Age-Structured Epidemic")
```

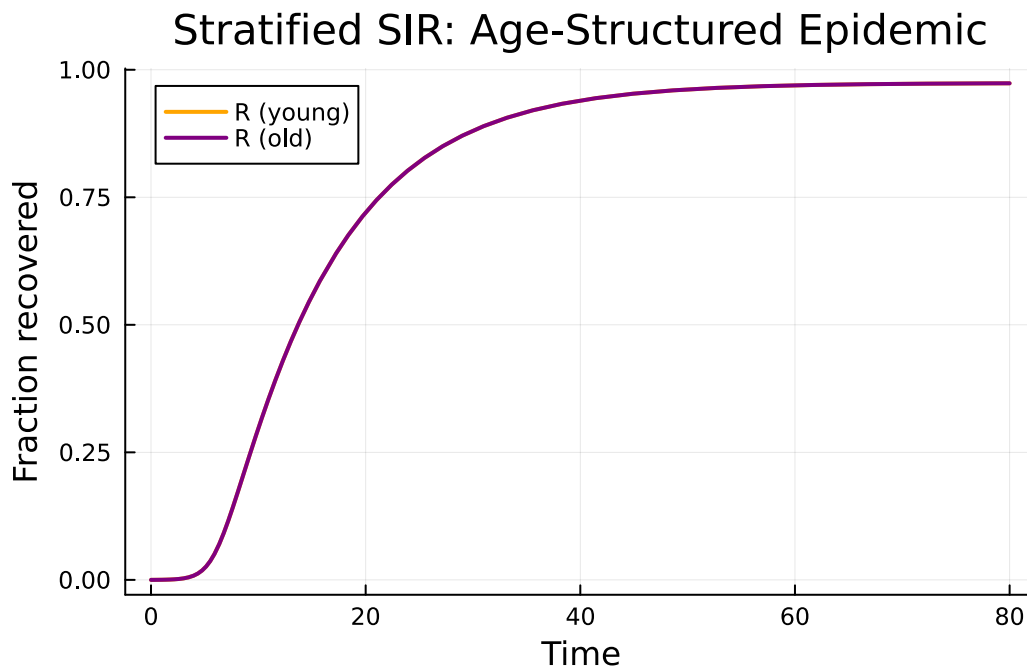


Figure 2: Stratified SIR: young and old populations with assortative contact mixing.

Both age groups experience a similar epidemic because the base network is Poisson with mean degree 5 and the mixing is moderately assortative. The young group has slightly higher within-group mixing (70% of contacts are with other young people), producing a marginally faster epidemic wave.

Natural transformations — EBCM to mass-action

A natural transformation relates the EBCM network model to a simpler mass-action approximation. On a Poisson network the excess degree distribution equals the degree distribution, so the EBCM and mass-action SIR are closely related. The `to_mass_action` function extracts $\beta_{\text{eff}} = \beta \cdot \psi''(1)/\psi'(1)$ (the excess-degree ratio, *not* the mean degree) and γ . For a Poisson network this ratio equals $\langle k \rangle$, but for non-Poisson networks the two differ.

```
pgf_poisson = poisson_pgf(5.0)
prog_sir = DiseaseProgression(
    [DiseaseStage(:I; transmission_rate = 0.3),
     DiseaseStage(:R; transmission_rate = 0)],
    [DiseaseTransition(:I, :R, 0.1)]; entry = :I,
)
sir_model = StaticConfigurationModel(pgf_poisson, prog_sir)

ma = to_mass_action(sir_model)
println("β_eff = ", ma.β_eff, " (expected: 0.3 × 5 = 1.5)")
println("γ      = ", ma.γ)
```

```
β_eff = 1.5 (expected: 0.3 × 5 = 1.5)
γ      = 0.1
```

The `compare_models` function solves both the EBCM and the mass-action approximation and returns the solutions for direct comparison:

```
result = compare_models(sir_model; tspan = (0.0, 80.0))
println("β_eff = ", result.β_eff)
println("γ      = ", result.γ)
```

```
β_eff = 1.5
γ      = 0.1
```

```

# EBCM solution
S_ebcm = compartment(result.ebcm, result.ebcm_system, :S)
I_ebcm = compartment(result.ebcm, result.ebcm_system, :I)

# Mass-action solution
S_ma = result.mass_action[result.ma_vars.S]
I_ma = result.mass_action[result.ma_vars.I]

plot(result.ebcm.t, I_ebcm, label = "I (EBCM)", lw = 3, color = :red)
plot!(result.mass_action.t, I_ma, label = "I (mass-action)", lw = 2, ls = :dash, color = :red)
plot!(result.ebcm.t, S_ebcm, label = "S (EBCM)", lw = 3, color = :blue)
plot!(result.mass_action.t, S_ma, label = "S (mass-action)", lw = 2, ls = :dash, color = :blue)
xlabel!("Time")
ylabel!("Fraction of population")
title!("Natural Transformation: EBCM → Mass-Action")

```

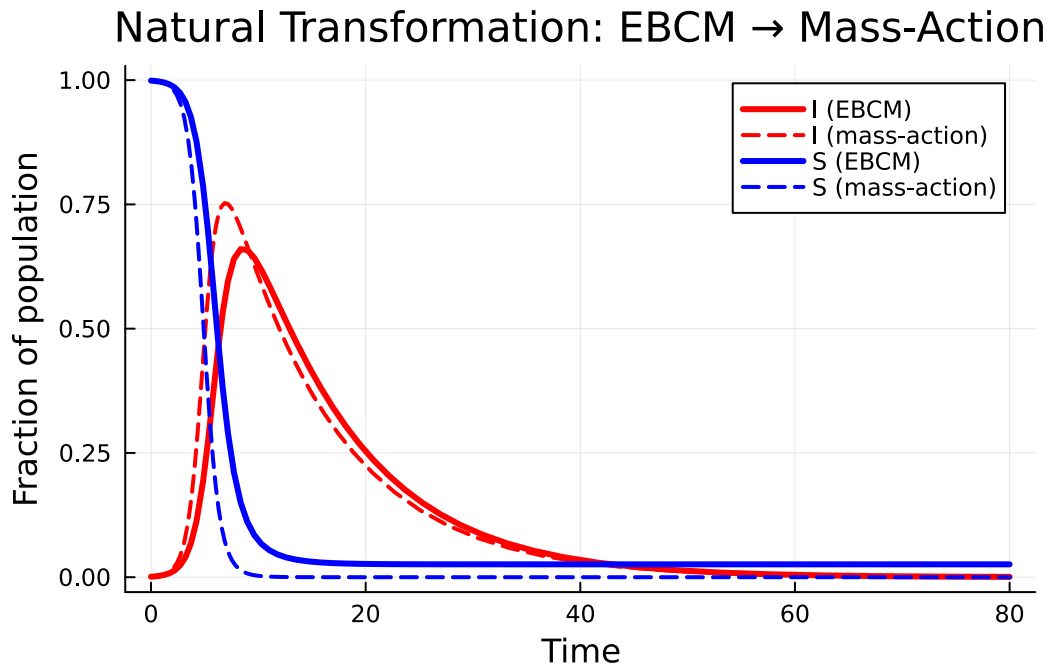


Figure 3: EBCM vs mass-action approximation on a Poisson(5) network.

On the Poisson network the two curves are close — the Poisson distribution’s lack of degree heterogeneity makes mass-action a reasonable approximation. Differences arise primarily because the EBCM tracks the exact depletion of susceptible edges, while mass-action assumes homogeneous mixing.

We can record the natural transformation as metadata:

```
nt = NaturalTransformation(
    :ebcm_to_mass_action,
    StaticConfigurationModel,
    Nothing,
    "EBCM → mass-action; valid when network is Poisson",
)
println("Transform: ", nt.name, " (", nt.source_type, " → ", nt.target_type, ")")
println(" ", nt.description)
```

```
Transform: ebcm_to_mass_action (StaticConfigurationModel → Nothing)
    EBCM → mass-action; valid when network is Poisson
```

Functor and functoriality

The EBCMFunctor is a callable that maps an open system (in the network category) to an EdgeModelSystem (in the ODE category) via `build_edge_system`. Categorically, a functor must preserve composition:

$$F(m_1 \otimes m_2) \cong F(m_1) \otimes F(m_2)$$

meaning the ODE system obtained by first composing and then applying F should match the one obtained by applying F to each component and then combining.

```
F = EBCMFunctor(:F)

# Apply functor to a single open system
sys_single = F(m1)
println("Variables: ", keys(sys_single.variables))
println("Observables: ", keys(sys_single.observables))
```

```
Variables: [:R, :φ_I, :pop_I, :pop_R, :φ_R, :θ]
Observables: [:I, :φ_S, :S, :edge_hazard, :excess_hazard]
```

```
ic_single = default_initial_conditions(sys_single)
sol_single = solve(ODEProblem(sys_single.system, ic_single, (0.0, 80.0));
    abstol = 1e-8, reltol = 1e-8)
println("Final S = ", compartment(sol_single, sys_single, :S)[end])
```

```
Final S = 0.025889583837423555
```

Verifying functoriality

verify_functoriality checks the functor equation by solving both paths — compose-then-map vs map-then-combine — and comparing the trajectories:

```
m_fa = open_sir(pgf_a, 0.3, 0.1; name = :fa)
m_fb = open_sir(pgf_b, 0.2, 0.1; name = :fb)

vf = verify_functoriality(m_fa, m_fb, Pair{Symbol,Symbol}[];
                        tspan = (0.0, 80.0), atol = 1e-4)
println("Is functorial: ", vf.is_functorial)
println("Max trajectory difference: ", vf.max_difference)
println("Composed retcode: ", vf.composed_retcode)
```

```
Is functorial: true
Max trajectory difference: 4.055173974393256e-10
Composed retcode: Success
```

```
# Build systems for correct variable keys
sys_fab = build_edge_system(tensor(m_fa, m_fb).model)
sys_fa = build_edge_system(m_fa.model)
sys_fb = build_edge_system(m_fb.model)

κ_fa, κ_fb = 5.0, 3.0
ψ_fa(x) = exp(κ_fa * (x - 1))
ψ_fb(x) = exp(κ_fb * (x - 1))

θ1_comp = compartment(vf.composed_solution, sys_fab, :θ_fa)
θ2_comp = compartment(vf.composed_solution, sys_fab, :θ_fb)
S1_comp = ψ_fa.(θ1_comp)
S2_comp = ψ_fb.(θ2_comp)

θ1_ind = compartment(vf.individual_solutions[1], sys_fa, :θ)
θ2_ind = compartment(vf.individual_solutions[2], sys_fb, :θ)
S1_ind = ψ_fa.(θ1_ind)
S2_ind = ψ_fb.(θ2_ind)

plot(vf.composed_solution.t, S1_comp, label = "Pop A - F(m1⊗m2)", lw = 3, color = :blue)
plot!(vf.individual_solutions[1].t, S1_ind, label = "Pop A - F(m1)", lw = 2, ls = :dash, color = :blue)
plot!(vf.composed_solution.t, S2_comp, label = "Pop B - F(m1⊗m2)", lw = 3, color = :red)
plot!(vf.individual_solutions[2].t, S2_ind, label = "Pop B - F(m2)", lw = 2, ls = :dash, color = :red)
xlabel!("Time")
```

```
ylabel!("Fraction susceptible")
title!("Functoriality:  $F(m_1 \otimes m_2) \cong F(m_1) \otimes F(m_2)$ ")
```

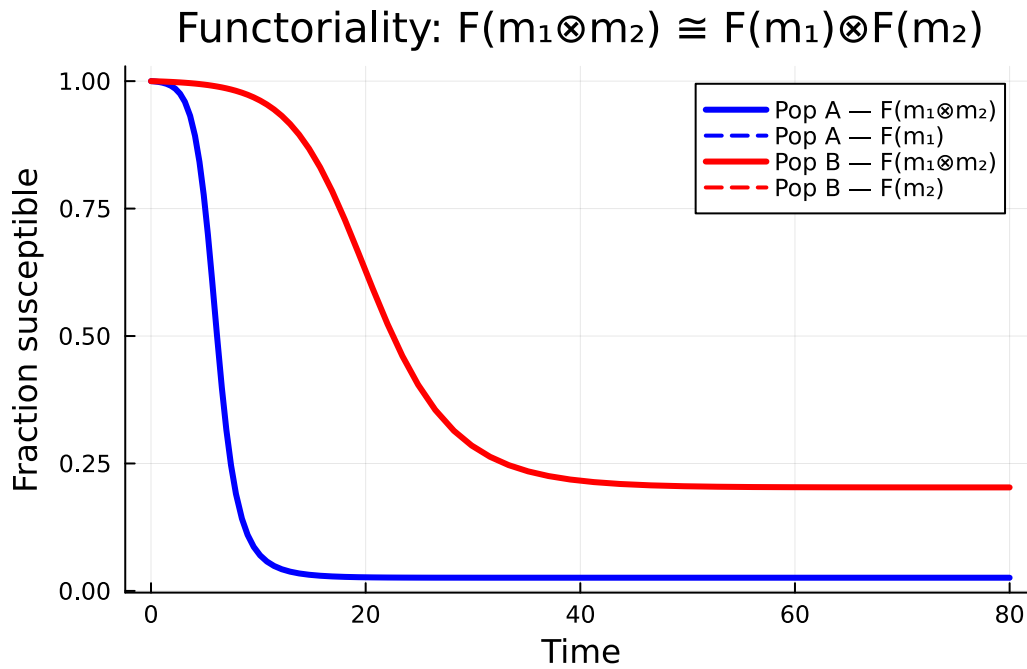


Figure 4: Functoriality check: $F(m_1 \otimes m_2)$ matches $F(m_1), F(m_2)$ to machine precision.

The solid (composed) and dashed (individual) curves coincide, confirming that the EBCM functor preserves the tensor product.

Simulation validation

We validate the EBCM SIR prediction (Poisson $\kappa=5$) used in the natural-transformation section against Gillespie SSA via `NetworkOutbreaks.jl`.

```
include("../_validation.jl")

# Note: the SIR progression in this vignette uses  $\beta=0.3$ ,  $\gamma=0.1$ ,  $\kappa=5$  ( $R_0 \approx 3$  on
# Poisson). We validate at those parameters, not the canonical ( $\gamma=0.25$ ,  $R_0=2$ )
# anchor used elsewhere.
import EdgeBasedModels: sir_model as ebm_sir_model
prog_for_no = ebm_sir_model() # avoids local `sir_model` rebinding above
```



```
t_g, μ_g, σ_g = gillespie_ribbon(
    prog_for_no, Dict(:β ⇒ 0.3, :γ ⇒ 0.1),
    poisson_graph_builder(1000, 5.0);
    N = 1000, n_graphs = 5, nsims_per_graph = 20,
    tspan = (0.0, 80.0), seed_fraction = 0.001)
```

```
([0.0, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5 ... 75.5, 76.0, 76.5, 77.0, 77.5, 78.0, 78.5,
```

```
plot(t_g, μ_g[:I], ribbon = σ_g[:I], label = "SSA (mean ± 1σ)",
     color = :red, fillalpha = 0.2, linealpha = 0.6)
plot!(result.ebcm.t, I_ebcm, label = "EBCM", lw = 3, color = :red)
plot!(result.mass_action.t, I_ma, label = "Mass-action", lw = 2,
     ls = :dash, color = :red)
xlabel!("Time"); ylabel!("Fraction infected")
title!("EBCM, mass-action and SSA on Poisson(5)")
```

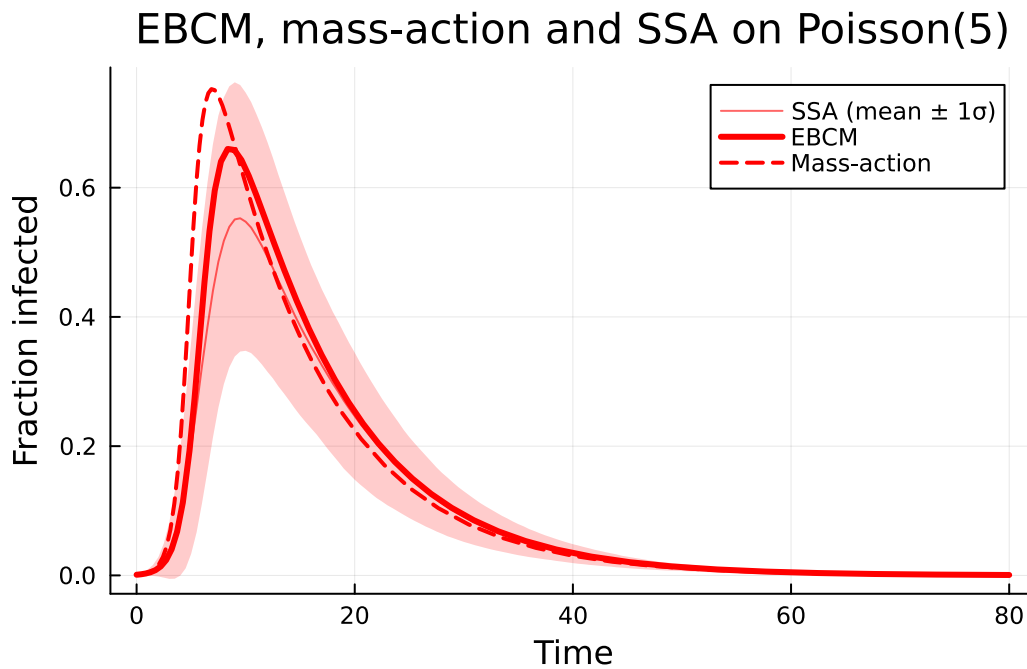


Figure 5: EBCM (red) and mass-action approximation (red dashed) versus Gillespie SSA mean $\pm 1\sigma$ (red ribbon).

The EBCM tracks the SSA mean closely; the mass-action curve diverges in the expected direction because it ignores the depletion of susceptible neighbours.

Summary

|———|—————|—————| | Open system | OpenEBCM, Port | A model with named boundary interfaces | | Tensor product | `tensor(m1, m2)` | Independent parallel populations | | Composition | `compose(m1, m2, wiring)` | Cross-infection coupling between populations | | Stratification | `stratify(base, strata, mixing)` | Age/risk structured populations | | Natural transformation | `to_mass_action, NaturalTransformation` | Relating network and mean-field models | | Functor | EBCMFunctor | Systematic mapping from network to ODE | | Functoriality | `verify_functoriality` | Composition commutes with ODE construction |

The categorical framework turns model construction from ad-hoc equation manipulation into a principled algebraic workflow: define small open systems, compose them via explicit wiring diagrams, and let the functor produce the correct coupled ODE system automatically.