

1. Assume that you want to generate a table of multiples of any given number. Write a program that allows the user to enter the number and then generates the table, formatting it into 10 columns and 20 lines. Interaction with the program should look like this (only the first three lines are shown):

Enter a number: 7

7	14	21	28	35	42	49	56	63	70
77	84	91	98	105	112	119	126	133	140
147	154	161	168	175	182	189	196	203	210 *

Code


```
#include <iostream>
using namespace std;

int main(){
    int i;
    int num;

    cout << "Enter a number: ";
    cin >> num;

    for( i = 1; i <= 200; i++)
    {
        cout << num * i << "\t";
        if(i % 10 == 0)
            cout << endl;
    }
    return 0;
}
```

Output

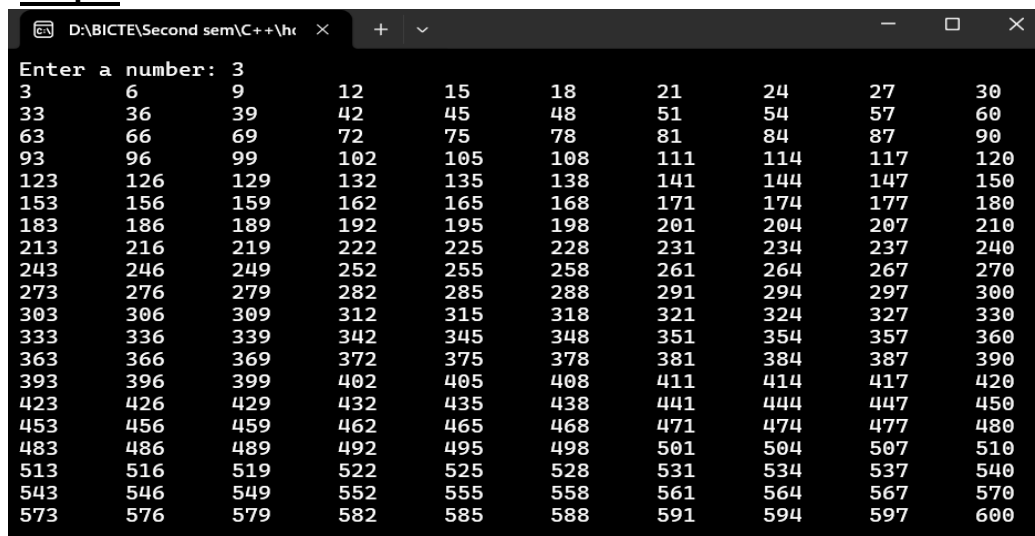

The screenshot shows a Windows command prompt window titled "D:\BICTE\Second sem\C++\hc". The program prompts "Enter a number: 3". The output is a table of multiples of 3, formatted into 10 columns and 20 rows. The numbers are displayed in a monospaced font, with tabs used for alignment. The last number in the table is 600.

3	6	9	12	15	18	21	24	27	30
33	36	39	42	45	48	51	54	57	60
63	66	69	72	75	78	81	84	87	90
93	96	99	102	105	108	111	114	117	120
123	126	129	132	135	138	141	144	147	150
153	156	159	162	165	168	171	174	177	180
183	186	189	192	195	198	201	204	207	210
213	216	219	222	225	228	231	234	237	240
243	246	249	252	255	258	261	264	267	270
273	276	279	282	285	288	291	294	297	300
303	306	309	312	315	318	321	324	327	330
333	336	339	342	345	348	351	354	357	360
363	366	369	372	375	378	381	384	387	390
393	396	399	402	405	408	411	414	417	420
423	426	429	432	435	438	441	444	447	450
453	456	459	462	465	468	471	474	477	480
483	486	489	492	495	498	501	504	507	510
513	516	519	522	525	528	531	534	537	540
543	546	549	552	555	558	561	564	567	570
573	576	579	582	585	588	591	594	597	600

2. **Write a temperature-conversion program that gives the user the option of converting Fahrenheit to Celsius or Celsius to Fahrenheit. Then carry out the conversion. Use floating-point numbers. Interaction with the program might look like this:**

Type 1 to convert Fahrenheit to Celsius,
 2 to convert Celsius to Fahrenheit: 1

Enter temperature in Fahrenheit: 70

In Celsius that's 21.111111

```
#include<iostream>
using namespace std;
int main(){
    int choice;
    float fahrenheit, celsius;
    cout << "Type 1 to convert Fahrenheit to Celsius," <<endl;
    cout << "2 to convert Celius to Fahrenheit: ";
    cin  >> choice;

    if(choice ==1){
        cout << "Enter temprature in Fahrenheit: ";
        cin >> fahrenheit;
        celsius = (fahrenheit - 32) * 5.0 / 9.0,
        cout << "In Celsius that's " << celsius;
    }
    else if(choice == 2){
        cout << "Enter temprature in Celsius: ";
        cin >> celsius;

        fahrenheit == (celsius * 9.0 / 5.0) + 32;
        cout << "In Fahrenheit tha's " << fahrenheit;
    }else {
        cout << "Invalid Choice!";
    }
    return 0;
}
```