

anisotropic: RTKNNC vote-model comparison at K=8


reference labels

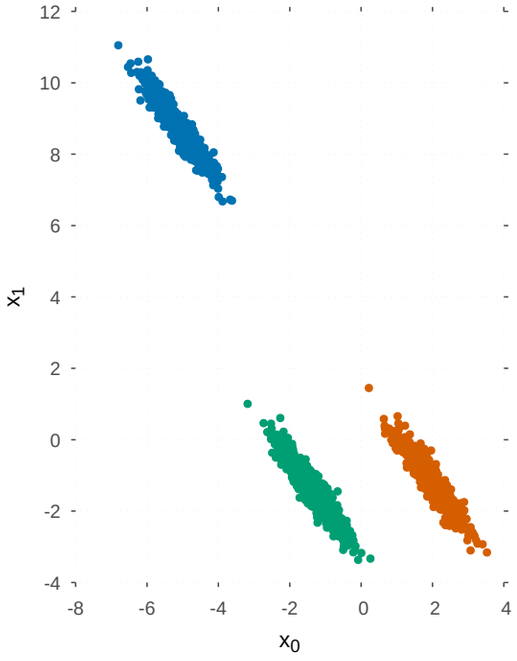


budget-matched uniform h(u)=1
clusters=3, ARI=1.000, NMI=1.000

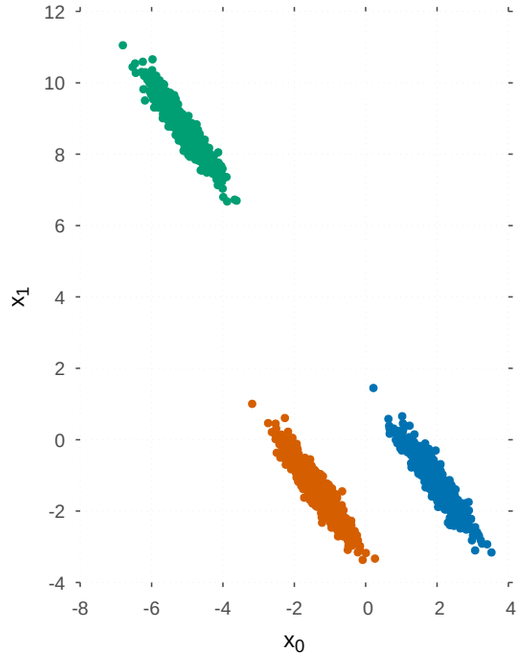


budget-matched inverse h(u)=1/u
clusters=3, ARI=1.000, NMI=1.000

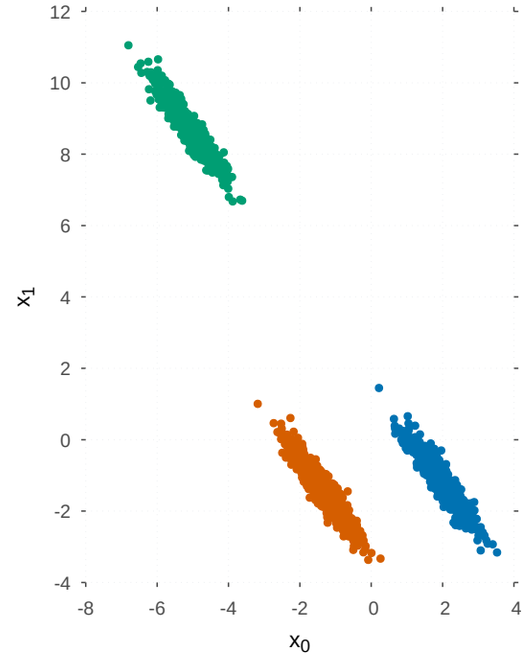

historical inverse-square g(r)=1/r^2
clusters=3, ARI=1.000, NMI=1.000

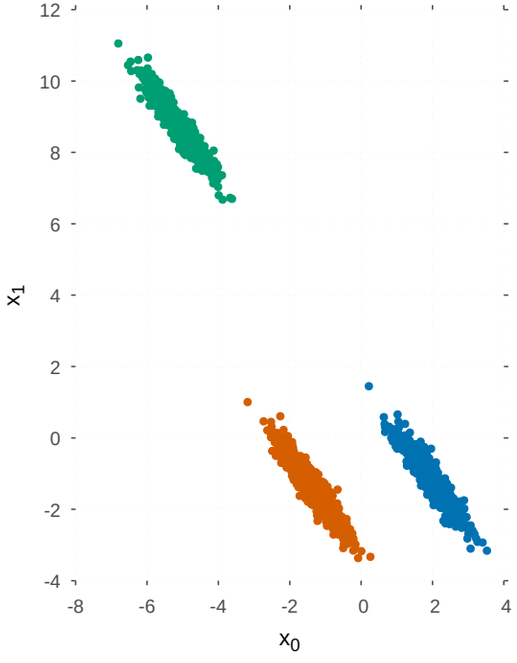

budget-matched sigmoid h(u)=$S_a$lpha(u), alpha=8
clusters=3, ARI=1.000, NMI=1.000

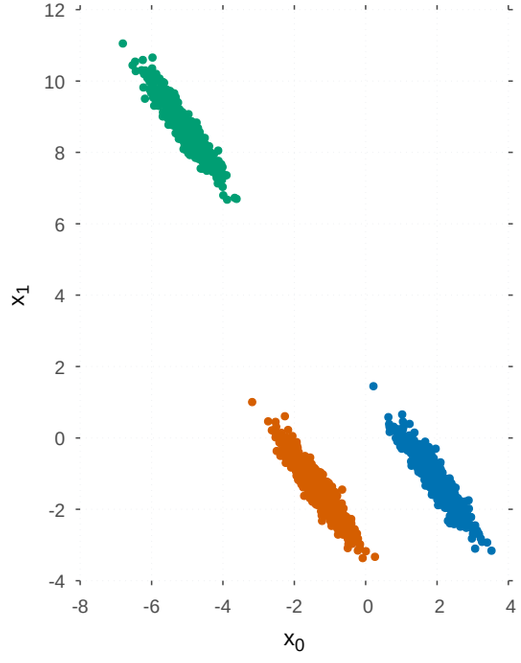

Four budget-matched shapes; inverse-square remains historical.

Colours identify clusters independently in each panel.

Grey denotes an unclustered point.

Every model uses the same KNN graph and source vote budget.