



Example: the neighbourhood of an instance e




Steps 1–2: pretrained, unit-normalized codes



each code is ℓ_2 -normalized: $\widehat{\text{emb}}(\cdot) = \text{emb}(\cdot) / \|\text{emb}(\cdot)\|$

Step 3: concept-bound construction of $\text{init}(e)$ (over e 's edges in the *instance* graph; uniform weights $\alpha = \beta = \gamma = \delta = 1$)

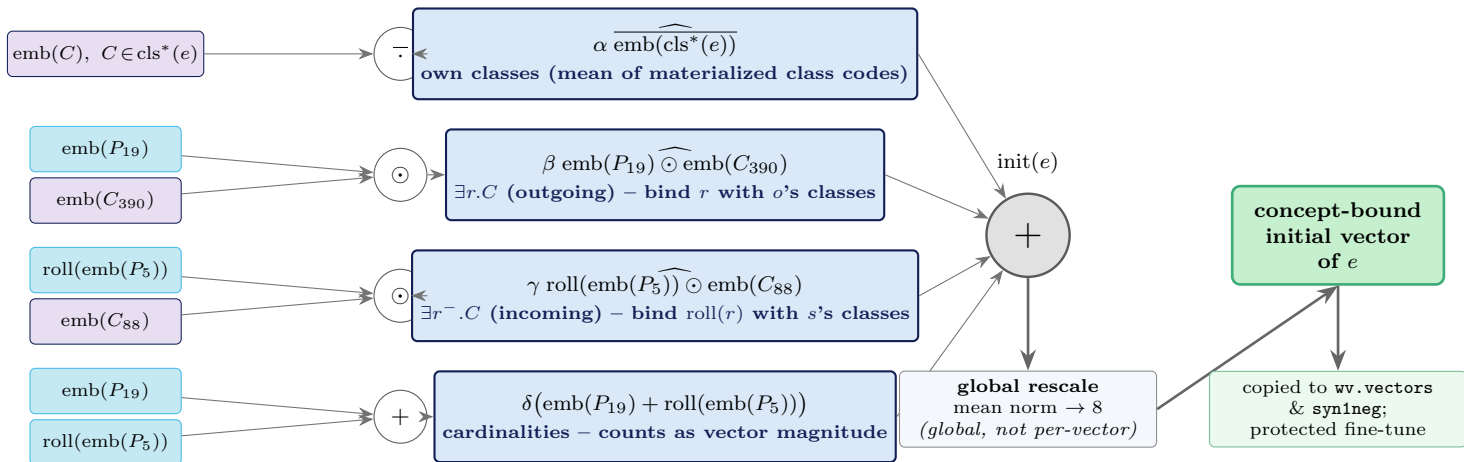

class code



relation code



bound / partial term



instance / output

$\widehat{\cdot}$: ℓ_2 -norm

$\odot$: Hadamard

$\lrcorner$: mean

roll : shift