



class vector used in the init




not used / out-of-vocabulary




instance to be initialized

most_specific

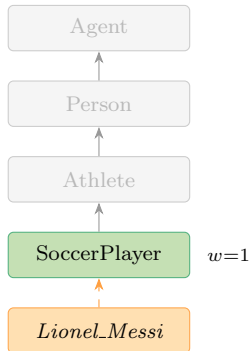


$v_{\text{init}} = v(\text{SoccerPlayer})$
 most-specific class only;
 if it is OOV the
 instance stays *random*

all_init

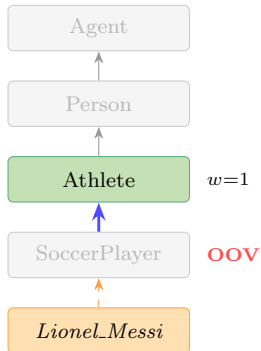


$v_{\text{init}} = v(\text{Athlete})$
 leaf is OOV $\Rightarrow$ climb
 subclassOf to the near-
 est covered ancestor

average_hier

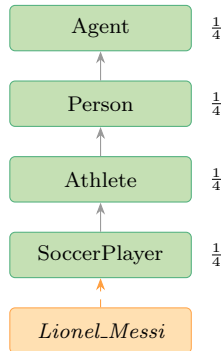

$v_{\text{init}} = \frac{1}{4} \sum_c v(c)$
 uniform mean over
 the class *and all* its
 transitive superclasses

weight_hierarchy

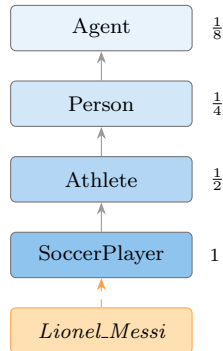

$v_{\text{init}} = \frac{\sum_c \lambda^d v(c)}{\sum_c \lambda^d}$ ($\lambda=0.5$)
 decay by hop distance d :
 specific classes dominate,
 general ones add residually