BALL VALVES TEST UNITS for PLASTIC PIPES

DESCRIPTION

Statutory standards prescribe the verification of carbon black content of polyolefin plastics. The test method isbased on pyrolitic decomposition of the material in an inert gas flow (nitrogen). This means that the remaining quantity is burned once again under forced ventilation at the same temperature and the carbon black content determined by means of weight difference.

Accessories

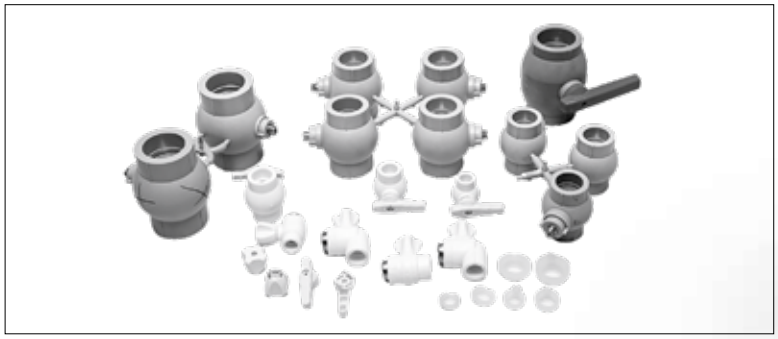

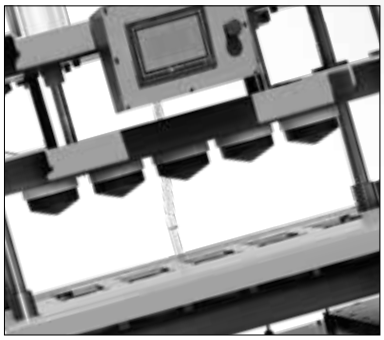

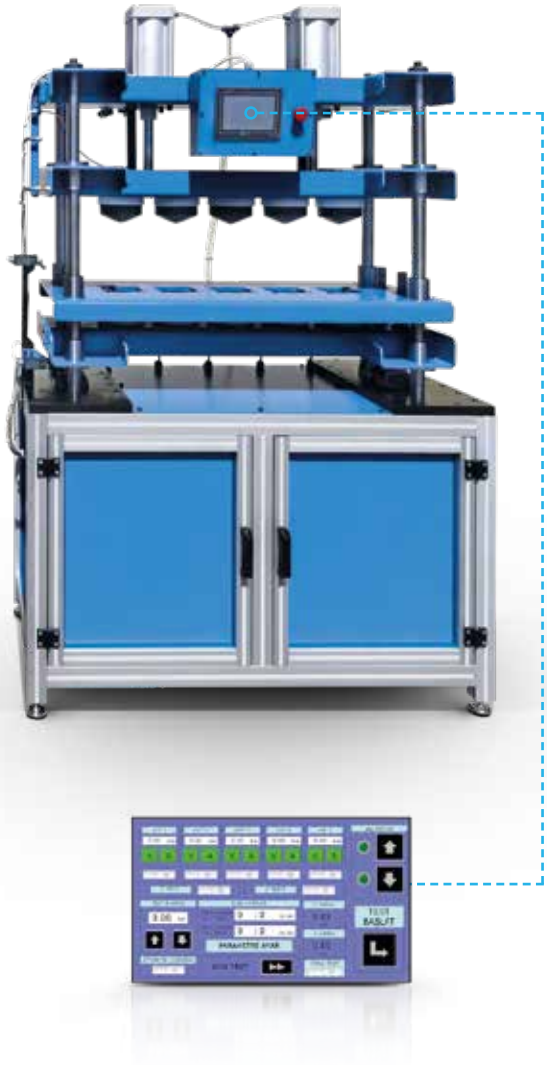

- 5 stations can be active at a time between Ø20 - Ø63 mm
- 2 stations can be active at a time between Ø75 - Ø90 mm
- Pneumatic piston driven Head Closing
- ± 0,2 bars testing pressure adjusting sensitivity between 0.5-6 bars.
- Whole System PLC Control
- Test Pressure and all other testing parameters can be defined,controlled and followed through Touchscreen User Interface.
- Quick reachable prescriptions for the testing parameters with the help of Log-Memo function
- Audio-Visual Warning and indication System
- OPTIONAL: Quick Log Report System (PoliREPORT)
- OPTIONAL: Windows based Data Collecting & Reporting System (PoliLOGGER)
- Remote Operation & Test Control through PC (Start / Stop, Defining test parameters,following the test and reporting) (PoliCONTROL)

BALL VALVES TEST UNITS for PLASTIC PIPES

Standards
DIN EN ISO 15874
EN 1329

Versions

		T1201V1P	T1101V2P
Working range		20-63	20-40
Test Bar	Bar	0.5-6.0	0.5-6.0
Test accuracy	Bar	±0.2	±0.2
CE conformity		•	•
Permissible ambient temperature	°C	+5 to +40	+5 to +40
Permissible relative humidity		Max.70	Max.70
Width (internal/external)	mm	1250	400
Depth (internal/external)	mm	600	400
Height (internal/external)	mm	2000	600
Voltage data		220/380V. 50/60 Hz	

● included ○ available / optional □ eligible - not available

POLİNAR PLASTİK MAKİNE ve KALIP SANAYİ
TİCARET LİMİTED ŞİRKETİ
İkitelli O.S.B Eskoop San. Sit. D Blok
No: 34 Başakşehir / İSTANBUL - TURKEY

Phone : +90 212 549 88 20 – 21
Fax : +90 212 549 88 19
E-Mail : info@polinar.com.tr

www.polinar.com.tr

PTE (POLİNAR TEST EQUIPMENT)
İkitelli O.S.B. Eskoop San. Sit.
D Blok No.34 Başakşehir
İstanbul / TURKEY

Phone : +90 212 549 88 20 – 21
Fax : +90 212 549 88 19
E-Mail : info@polinar.com.tr

www.pte.com.tr

POLINAR GmbH
THE ICON VIENNA, Tower 24
Wiedner Gürtel 13 1100
Vienna AUSTRIA

Phone : +43 (0) 1 253535 4044
Fax : +43 (0) 1 253535 4044
Mobile : +43 676 5983869
E-Mail : office@polinar.at

www.polinar.at