FALLING WEIGHT IMPACT TESTER

DESCRIPTION

The falling weight tester is used to determine the external impact resistance of thermoplastic pipes using the staircase or round-the-clock method.

Accessories

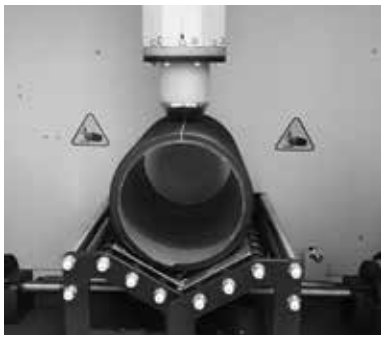

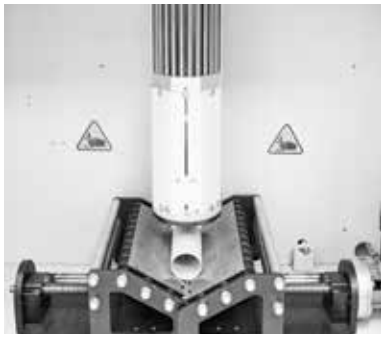

Simple and safe operation

- Convenient operation and clear visualisation via integrated touch display
- Two-hand operation when activating the test procedure to protect the operating personnel
- Test can only be carried out when the test chamber is closed

Reliable test results

- Precise weight positioning thanks to step motor

Lasting efficiency

- High-quality unit components guarantee high reliability, a long service life and low maintenance costs

State of the art technology

- State of the art PLC
- Automatic double impact prevention system.

FALLING WEIGHT IMPACT TESTER

Standards
ISO 11173
ISO 3127
ASTM D 2444

Versions

		T032630V1P	T032630V2P	T032630V3P
Max. drop height	m	2	2	2
Max. sample diameter	mm	110	400	710
Accuracy of height adjustment	mm	±10		
Drop weights	kg	6.3 kg		
Nose design		Depending on the applicable standards		
Lowest drop height without double impact	m	Typically 0.5 (dependent on sample)		
Speed error margin (typical)		>5% of the theoretical falling speed		
Operation/visualisation		Touch display		
CE conformity		●		
Permissible ambient temperature	°C	+5 to +30		
Permissible relative humidity		Max. 70%, non-condensing		
Noise emission		<70 dB(A) at rest (Noise generated on impact of the drop weight depending on the sample)		
Width of tester	mm	980	980	980
Depth of tester	mm	800	800	800
Height of tester	mm	3000	3750	3750
Width of control cabinet	mm	620		
Depth of control cabinet	mm	460		
Height of control cabinet	mm	1030		
Voltage data		**3 ph 380/400 VAC 230/400 V, 50/60 Hz (other voltages on request)**		

● included ○ available / optional □ eligible - not available

POLİNAR PLASTİK MAKİNE ve KALIP SANAYİ
TİCARET LİMİTED ŞİRKETİ
İkitelli O.S.B Eskoop San. Sit. D Blok
No: 34 Başakşehir / İSTANBUL - TURKEY

Phone : +90 212 549 88 20 – 21
Fax : +90 212 549 88 19
E-Mail : info@polinar.com.tr

www.polinar.com.tr

PTE (POLİNAR TEST EQUIPMENT)
İkitelli O.S.B. Eskoop San. Sit.
D Blok No.34 Başakşehir
İstanbul / TURKEY

Phone : +90 212 549 88 20 – 21
Fax : +90 212 549 88 19
E-Mail : info@polinar.com.tr

www.pte.com.tr

POLINAR GmbH
THE ICON VIENNA, Tower 24
Wiedner Gürtel 13 1100
Vienna AUSTRIA

Phone : +43 (0) 1 253535 4044
Fax : +43 (0) 1 253535 4044
Mobile : +43 676 5983869
E-Mail : office@polinar.at

www.polinar.at