

MAS-IT

Business frameworks in QC laboratory processes

Masterthesis von

Etienne Rebetez

FHNW

Hochschule für Technik

Studiengang MAS-IT

Betreuender Dozent:

Dr. sc. techn. Ronald Tanner

Bern, July 20, 2012

Summary

Text

Vorwort

Text

Contents

1	Introduction	5
2	The Laboratory landscape	5
2.1	Instrument software	7
3	Concept and Target	7
3.1	Requirements	7
4	BPEL	8
5	BPMN	8
6	Process Engines	8
6.1	activeVOS	9
6.2	activiti	9
6.3	Apache ODE	10
6.4	ARIS	10
6.5	biztalk	10
6.6	Summary of products	11
6.7	Conclusion	12
6.8	Compatibility	12
7	Example Application	12
8	Software Architecture	13
8.1	Graphical user interface	14
8.2	process engine	14
8.3	configuring	16
8.4	dependencies	16
9	Webapplication	16
9.1	class design	17
9.2	BPMN deployment	19
9.3	Internationalization	19
9.4	ldap	19
10	External application server	19
10.1	server	19
10.2	client	20

10.3 Protocol	20
11 Processes / Methods	22
12 Components	22
12.1 Data structure	22
12.2 Marshalling	23
12.3 Compression	23
12.4 excel adapter	25
13 Environments	25
14 Build tools	26
14.1 Ant	27
14.2 Maven	27
14.3 Gradle	27
14.4 Usage	27
15 Testing and Validation	28
15.1 Unit Tests	28
15.2 Validation Tests	28
16 Versioning	29
16.1 using git	29
17 Deployment	30
17.1 Maven repository	30
18 Infrastructure	31
18.1 Webb application server	31
18.2 Database server	33
18.3 Calculation server	33
18.4 Repository server	33
19 Conclusion	33
19.1 Future	34
Literaturverzeichnis	35

1 Introduction

Laboratory processes. What is that all about? A simplified view looks like the following. A sample of a certain substance comes into the QC lab. What analysis have to be made etc. is given by the labor information and management system (LIMS) [1]. The LIMS also says when and what sample has to be analysed. The lab performs then the analysis. All used solutions, instruments and steps have to be documented. That is traditionally done on paper.

At this point it is important to emphasize that everything that is not documented isn't done from an audit point of view (see GMP [3]). Also the standard operating procedure (SOP) has to be followed exactly by the lab technician. After the analysis it is mostly the case to have a calculation step where certain parameters are calculated to get the final value. The final value is then transferred back into the LIMS database. These are mainly manual steps. These manual steps can lead to errors and are time consuming. Although the operating of balances, creation of solution or other practical tasks cannot be automated, the data flow and the process can.

This report aims to look at the layer between LIMS and the instruments and the analysis method. In the past few years there has been a ton of programs that aim to solve that problem. Some try to achieve that with an almighty LIMS. But since most LIMS programs date from the 90's the implementation is not easy and you end up having a not maintainable huge monolithic system. There is also the idea of electronic lab notebooks (ELN) [4]. These ELN where usually conceived for R&D laboratory. That means more freedom and less strict processes. Then there is the software for the instruments, that can perform more and more tasks. This looks like a good idea, but there are so many instruments, methods and manufactures that there is just no solution that fits it all. Also it is still the case, that one solution of one manufacturer is in no way compatible to the solution of another manufacturer.

This is report therefore explores what existing tool exists in the business IT world and if they could be used to automate a chemical laboratory.

2 The Laboratory landscape

The laboratory knows many different analytic methods. They all have different requirements and provide different forms of results. That gives us an extremely

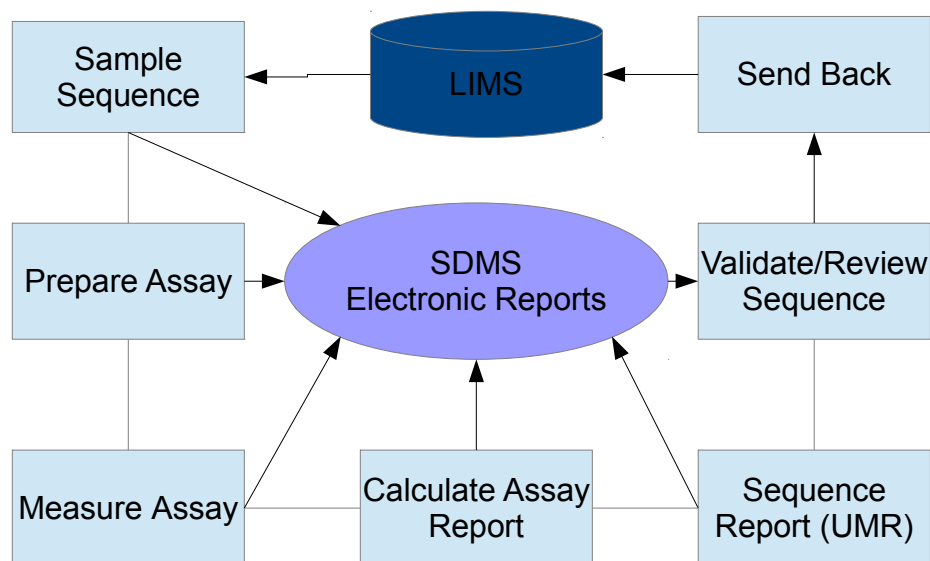


Figure 1: The current lab work flow

heterogeneous landscape.

First we need to look at the current laboratory work flow, with the given programs. Historically, and still so, the lab uses the LIMS to see what samples have to be done and to type the results back. The LIMS is a high level program that was designed to manage samples.

There is also a second program in use. A Scientific data management system (SDMS) [2] database. This stores raw data from analysis and provides an API to retrieve and query the data. To normalize the data and provide an easy review ability of every step, a report, that can be viewed and signed in the SDMS database, is created and printed into the database. The problem with heterogeneous data and raw data reports is currently overcome with the SDMS database. It is possible to print reports into the database and tag them automatically. As a result the reports printed into that database can be parsed and the data is then available in an electronic form. This currently is in place and works pretty well. It is however mostly implemented in Excel [5] applications.

As you can see in figure 1 there is a high level process. Each step can have manual user steps or can be done automatically with scripts or some sort of application.

The assays a.k.a samples usually are grouped together in an sequence.

2.1 Instrument software

3 Concept and Target

So the question came up, why not look at something completely different. The lab is not the only business that has processes. There could be other business frameworks that provide the needed functionality. This system should be able to integrate and interface these different islands of programs. It would be like a laboratory middle ware [9].

To make the automation in such a heterogeneous landscape possible a sort of state machine is needed. This state machine knows how process look like, which processes are currently run, in which state they are in and which is the next to execute. This pattern is basically the same in every business process. One of the terms is SOA (Service Oriented Architecture) [8]. The state machine engine would therefore be the heart of the whole automation process.

Since the lab is obviously not the only place in the world that has predefined process a look at generic state machines was imminent. To configure these state machine engines there are already several standards. Two process definition languages are already well established:

- BPEL
- BPMN

Both are open standards from OMG [10].

3.1 Requirements

Beside the central process engine, there are also other aspects to be considered. One is a web application that should provide forms and an overview of the tasks. These human interfaces should also be available on mobile devices. Since the current implementation is based on excel sheets, lots of them, it of

importance that the current applications can be implemented and reused in the new framework. For instance it should be possible to send data to an excel application and get the results back into the process stream.

These sub tasks can be another sub process BPMN definition or just a program or script that is started via the process engine. If possible the user interaction should be reduced to one graphical user interface.

The task of a user is usually to fill out a form (if the data isn't available in the system), start processes or claim tasks to do and review raw data and reports.

4 BPEL

The BPEL (Business Process Execution Language) [6] was an answer to the process problem that came from the IT world. It is very technical and the process description is made with ifs and loops that are also known in common programming languages. The definition is made in a XML file.

5 BPMN

BPMN (Business Process Model and Notation) [7] has its roots in the business process modulation. It first was only a description language to provide some unified task or gateway definitions. These are the elements of the common flowcharts. With the version 2 of the BPMN standard these flowcharts can now be interpreted by an engine and be run as a program. The definition is made in a XML file.

6 Process Engines

The engines are implementations of these business description language. The engines provide all sort of logic that would be hard to implement every time from scratch.

- What processes are there
- Which are in what state

- Processes are recoverable and transaction save. (i.e in case of crash)
- What happens if a new version of the process is deployed.
- Who did what and when. (History and Log service)

The following chapters present some of these engines that are already available. The list is far from complete and in alphabetical order.

6.1 activeVOS

activeVOS [15] is a product from Active Endpoints, Inc. It uses open standards to implement its feature. The supported notations are BPEL and new also BPMN. Everything is implemented in Java and XML. The editor you get looks and feels like an eclipse plugin. The application runs on an JavaEE application server.

The documentations look good. It has videos, tutorials and they also provide training.

In addition they have some additional tools to the BPEL engine like reporting.

The cost for the implementations will cost around 50'000 USD [16].

6.2 activiti

activiti [11] is an open source BPMN engine. It was forked from the jBPM [14] from JBOSS. It is therefore a very young project that has the goal to build a rock solid BPMN engine. Activiti is really only the engine that provide an Java api. There is also a example web application Activiti Explorer that shows and demonstrate the ability of the activiti engine.

Because it is open source it is free of charge. Although the effort to get a working product might be bigger.

There is also a company Signavio [22] behind activiti. Signavio provides consulting and BPMN creation tools.

6.3 Apache ODE

Apache ODE [17] is an open source BPEL engine. ODE provides an Java API to use in a Java program. There is also an eclipse plugin, that helps create the BPEL XML definition in a graphical interface.

6.4 ARIS

ARIS [18] is a product from software AG. It is a big enterprise BPM solution that brings many tools like process overviews, dashboards, reports or monitoring. ARIS was developed to work well with SAP. Therefore it is by definition an high level implementation.

You buy a solution and the code is not accessible. software AG provides training for employees to configure or work with the product.

The cost looks to be quite high and is at least 10 Million USD [19].

6.5 biztalk

Biztalk [20] is the BPEL implementation from Microsoft. It is sold as biztalk server 2010 and is praised as Business Process Management (BPM) suite. Since it is a Microsoft product it is written and configured in the .NET programming language. Obviously the integration with other Microsoft products like Sharepoint should be good.

The enterprise edition costs around 44'000 USD [21]. For testing and development there is a free license.

6.6 Summary of products

Name	Notation	Language	License	Extras
activiti	BPMN	Java	Apache 2.0	only API
activVOS	BPMN/BPEL	Java	proprietary	uses open standards
Apache ODE	BPEL	Java	Apache 2.0	
ARIS	BPMN/BPEL	Java	proprietary	sold as fully feature product
biztalk	BPEL	.NET	proprietary	share point integration

Since either BPMN nor BPEL is in use at the moment the first thing to decide is what specification to use. It does not make sense to mix both, unless you already have one in use and wish to use the additional features of the other engine.

BPMN 2.0 seems to be the better choice due to the close business process view. BPEL exists longer but seems unnecessary complicated. Therefore BPMN is the better choice for the lab process definition.

If we now look at the BPMN 2.0 engines, only ActiVOS, activiti and ARIS remain from the list above.

ActiVOS provides some extra GUI's to give "simpler" access to the configuration. It creates xml and configurations in the background. They can fortunately be seen and changed from hand. In the bottom line, it seems nice but does not provide a big advantage. Also most documentations is for the BPEL engine.

ARIS is the big all inclusive package. It is however impossible to work yourselves on the project because they sell also the programming and support. Therefore there is no code ore xml visible in the hole package. So for each change the external company has to be contracted. They provide some basic training courses for configuration.

Activiti has a total other approach. It has no gui what so ever. I provides an open programming interface that provides all functionality of the engine. The XML can be easily edited directly. It is therefore slim and sticks to the one task it tries to solve. The downside is that there is a steep learning curve since everything has to be implemented in the code. Because it is open source there are already some example web application that can be used out of the box.

6.7 Conclusion

The monolithic concept of big systems has proven in the past to be inflexible and heavy on the maintenance. The decision was made to use activiti because of its simplicity and possibility to add other functions (i.e monitoring or reporting) in the future over other programs that also have just one functionality. Activiti plays also well together with Java based web frameworks like vaadin [27].

6.8 Compatibility

Although BPMN 2.0 is a standard and provides most keywords and rules the implementations still adds own keywords or extra functionality (i.e forms). So the BPMN files can't just be copied from one engine to another. If you chose one engine it is kinda final and you will have to stick to it.

If an engine change really has to be made it is however simpler to achieve than if you had the complete logic inside the code. If the new engine even uses the same programming language, it is very probable, that you can just reuse the business logic classes.

7 Example Application

In order to have concrete task to try the business framework on, a example application was designed.

The process takes an annual inventory item review. These items are reference samples of the substance that were sold.

First a list of the reference samples that have to be checked is retrieved from the parent system (i.e LIMS). This is done with a SQL query on the database. The sample number and the location is then stored in a process variable as a data object list.

For each item in the list a sub process is started in parallel (callActiviy). The sub process is a separate BPMN process definition. The data object which represents a sample, is given to the newly created process.

Now the user can claim the tasks or in this case the samples they wish to check. Then they go to the location and provide the verdict of that sample

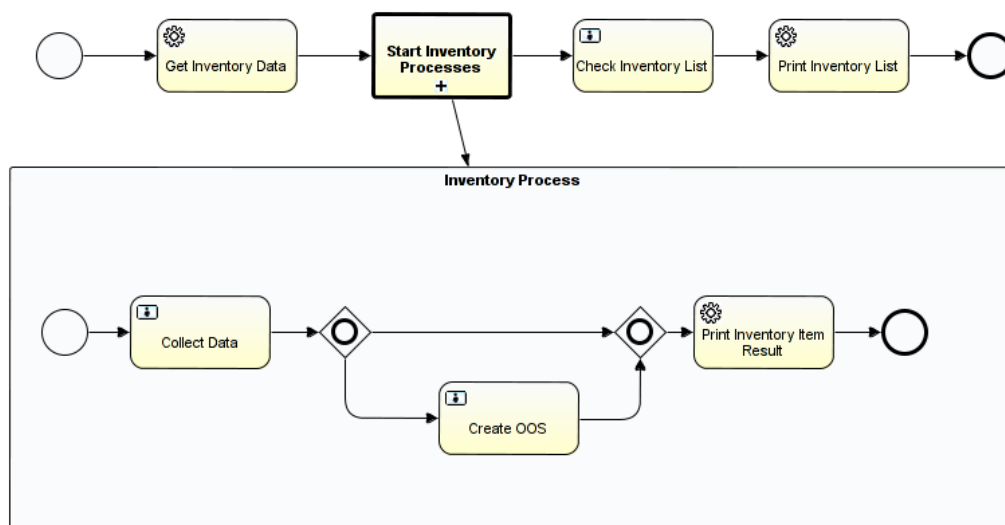


Figure 2: Example Application work flow

and a value. If the sample is fine a report is created otherwise a OOS (Out of specification) procedure has to be started first. The OOS process is not part of this demonstration application. It would however be very easy create and to call another sub activity in the future. To print the reports the existing infrastructure is used. The reports are stored in the SDMS and can be signed there. Once all samples have been controlled, the parent process goes to the next task.

The laboratory supervisor now gets the task to check the sample list. An overview of the sample list and the verdicts is presented to him. The entered values also gets calculated together. The calculation step is purely for the sake of demonstrations. The list with all samples is then again printed to the SDMS. That concludes the review process.

This process is used to illustrate the further examples and references.

8 Software Architecture

The environment consists of an user interface, the BPMN engine, the processes (laboratory methods) and universal usable components (jar archives). Most of

the code is written in Java.

To use the existing Excel applications a so called calculation server was written. This is a stand alone application and communicates over sockets with the client.

The BPMN process and forms are put together in an own jar archive. These process definitions can be add as dependency to the main application with the BPMN engine.

8.1 Graphical user interface

For the graphical user interface (GUI) the web application seems to be a good choice. The web application can be displayed on most devices. With the power of CSS [12] they can even be shown differently on small screens.

To keep things in Java and not being forced to be bothered with the web technology, vaadin [27] is used as a web framework.

8.2 process engine

For the process engine activiti is used. Activiti comes with a variety of services that provides the programmer with methods and informations.

The following services are available [13]

- `RuntimeService`: Service which provides access to Deployments, Process-Definitions and ProcessInstances.
- `RepositoryService`: Service providing access to the repository of process definitions and deployments.
- `TaskService`: Service which provides access to Task and form related operations.
- `ManagementService`: Service for admin and maintenance operations on the process engine.
- `IdentityService`: Service to manage Users and Groups.
- `HistoryService`: Service exposing information about ongoing and past process instances.

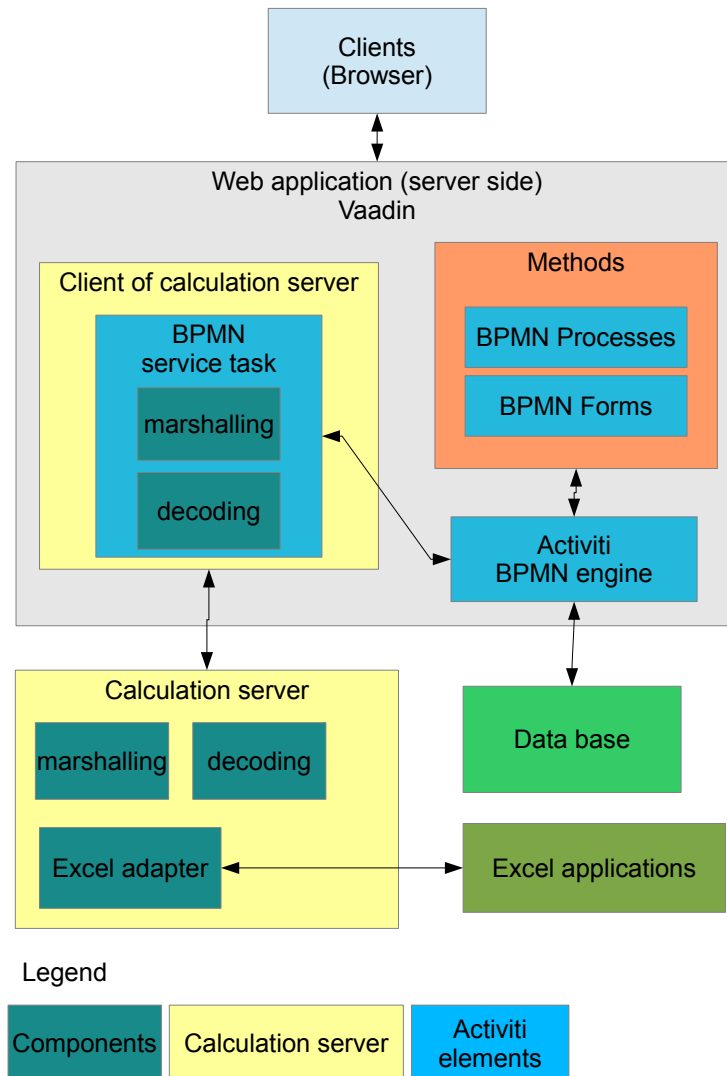


Figure 3: Overview of the architecture

- FormService: Access to form data and rendered forms for starting new process instances and completing tasks

For process related data the runtime service, task service and form service are the mostly used.

8.3 configuring

The Main Application (Web application) is configured using the spring framework [33]. The Spring framework uses the paradigm of the dependency injection [34].

This allow to configure external components, the database or process parameters in a XML configuration file. The Java code does not have to be modified.

This way components can be reused in different applications. It is also easy to configure them in unit tests.

8.4 dependencies

When dependencies are defined during the development they should be handled with the following rules to keep it simple:

- Components are in the lowest level followed by methods (processes) and then the (web applications).
- Components do not have dependencies of other components or higher applications like the web application. Only third party packages are allowed.
- Methods should only have components and third party packages as dependencies
- The web applications should where possible use the components or methods as dependencies. Third party packages are of course also allowed.

9 Webapplication

Besides the BPMN engine, the web application is a central cornerstone of this project. After all that is what the user gets to see. The decisions was made to

use Vaadin [27] as a web framework. It allows to program the web application completely in Java on the server side. So there is no need to get in trouble with web technology.

As the back end activiti is used. So the user management, transaction safety and business logic is taken care of.

To glue all the frameworks together, spring is used. In spring the configuration is made in a xml file. As a result the code doesn't has to have any knowledge of the environment it is in. The code can therefore be untouched when deployed to a productive system.

9.1 class design

The web application is a simple GUI application. As a starting point the example application "how to build a vaadin web application on top of activiti" was taken [28], [29].

There is the main window that holds different widgets in a layout. Each widget shows a certain information. For example there is a process viewer that presents the available BPMN processes. The following widgets are implemented in the demo web application.

- process viewer: shows available main processes
- task viewer: unassigned tasks
- my task viewer: shows the assigned tasks of the current user
- start task by id: tasks can be started by a give id
- form viewer: shows the form of the task that is executed
- history view: shows information about finished tasks and processes

There is a listener interface that can be implemented by these widgets. The task viewer listens to the process viewer if a new task is started. The my task viewer listens to the task viewer to see if a task is being claimed. And the form viewer checks if a task is executed. When the task is finished the task viewers are updated to show the remaining tasks.

Since activiti is being configured over spring, the activiti instances can be provided as singletons to each widget that needs them. This is done with the

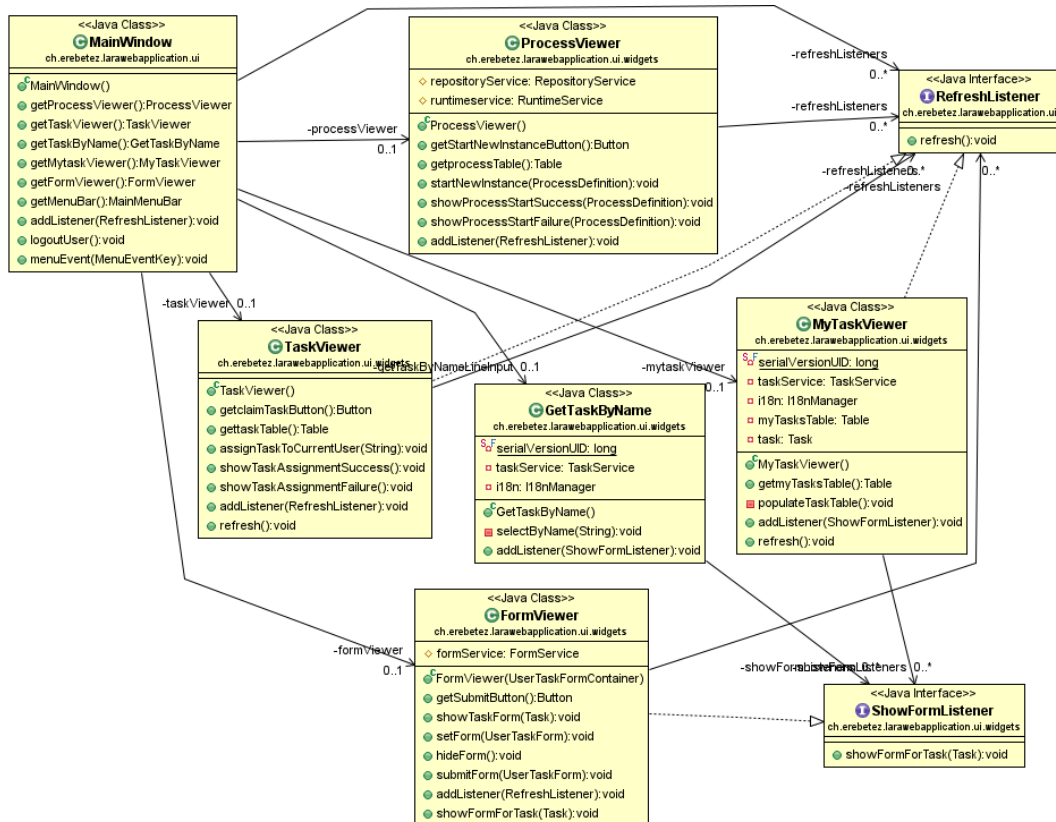


Figure 4: UML diagram of main web application classes

Annotation `@Autowired` [35]. This way the process logic is being separated from the user interface.

9.2 BPMN deployment

The demonstration web application deploys the BPMN processes to the activiti engine at start up. In the future and for productive use of activiti the BPMN process deployment should be done over a separate applications or as a function inside the web application. The deployment can also be done over the spring configuration.

9.3 Internationalization

Internationalization is only needed for the web application. Since the web application is written in basic java, the basic resource pattern can be used. That means each view able string is loaded from a resource file that holds the strings of the given local.

9.4 ldap

The user authentication can be done in the BPMN engine. The engine has to know anyway what user is currently logged in. Activiti can therefore be connected to a ldap server to retrieve the needed user login information.

10 External application server

The basic concept is a socket client rpc server architecture. [24]

10.1 server

The server receives a request to execute a certain excel application. It then executes this application. If multiple request are received they get stored in an array and then the external excel applications are run in serial.

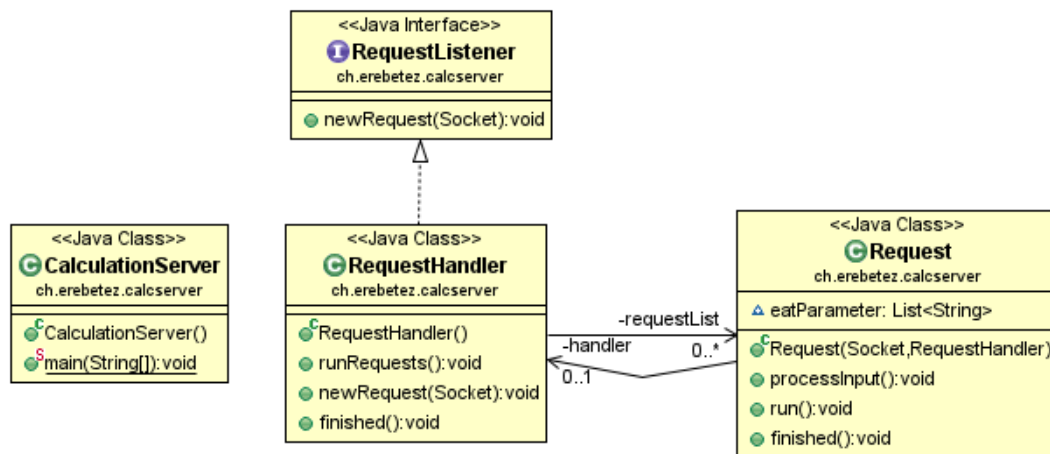


Figure 5: UML Class diagram of calculation server

10.2 client

The client is a BPMN service task for the engine server. This service task can be implemented in any process. The configuration of that task is made in spring. This way the methods or processes can configure their own external applications.

In the current implementations of the client service task it is possible to configure in spring the host name the port and the application name that has to be started.

The service task has to be thread save [25]. This is because activiti will call the same instance of the service every time a process needs it.

The client open a connection to the server does the communication with the defined protocol and finally writes the data back into the activiti variable.

If an error occurs a BPMN Java exception is raised.

10.3 Protocol

For the communication between both parties a protocol has to be defined. First the client send a request to the server that has an UUID [26], the application to start and the marshalled data object. Each information is separated by two "::<:". The Information string send to the server then looks like that.

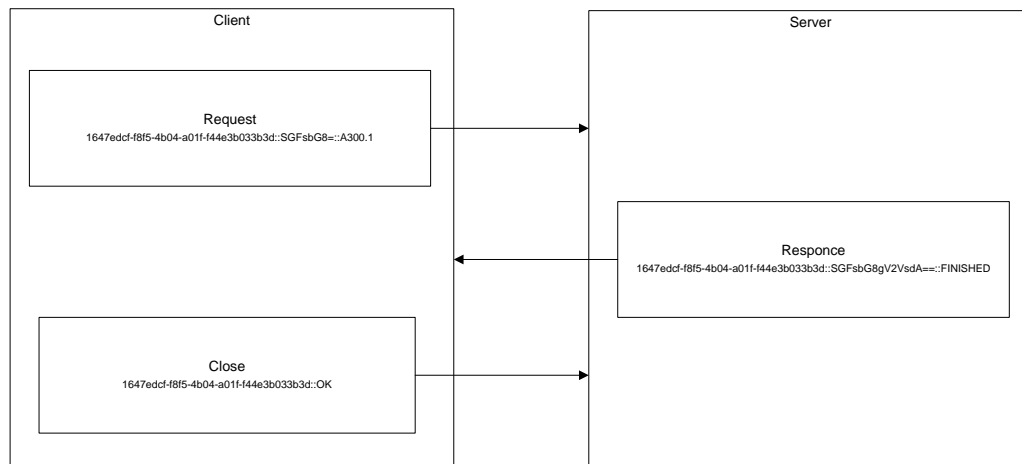


Figure 6: Visualisation of client server rpc protocol

UUID::MARSHALSTRING::APPID

1647edcf-f8f5-4b04-a01f-f44e3b033b3d::SGFsbG8=:A300.1

The client waits for a response. If The server cannot be reached an error is raised. The activiti client task will not finish and still be in the same state as before.

As soon as the server has processed the request, the answer in form of the following string is send back. First the UUID is given then the data as marshall string and finally the keyword "FINISHED".

UUID::MARSHALSTRING::FINISHED

1647edcf-f8f5-4b04-a01f-f44e3b033b3d::SGFsbG8gV2VsdA==:FINISHED

The UUID has to be the same as the one the client send in the first place. If not an error is raised.

If everything is fine, the client finally sends the OK to close the connection to the server. The finish signal looks like this.

1647edcf-f8f5-4b04-a01f-f44e3b033b3d::OK

The socket connection is then closed.

11 Processes / Methods

With methods analytical laboratory processes is meant. Each Method has at least a BPML xml definition.

In addition they can have custom forms that are implemented in Java. These forms are extended from an abstract form class that knows the activiti services. This way the forms can have the information from current execution variables or historic data from other tasks. For each form a spring bean is created in the method-context.xml file. This way it is then easy to add the form to the web application. The web application has a form container that is also configured with a spring context file.

If the process has other special service tasks the Java code can also be stored in these methods.

All this method files are bundled in a Java jar archives and versioned separately. Unit tests can also be run over these methods.

12 Components

Components are reusable packages of functions and classes. In Java the classes are put together in a jar file. These jar files can be imported in an other project and so be easily used. Jar files can be tested separately and be provided in a maven repository.

For this project a few of these components were created. For one they would have at some point been needed anyway and for the other reason to demonstrate the work flow with the build tools and repository.

12.1 Data structure

At the moment a specified data structure to store all the needed laboratory data already exists. It was implemented in vba and just consists of arrays, dictionary's and values. These structures exist in every programming language. Therefore it is easy to port the existing structure for example to Java. But since Java is object oriented the laboratory objects can be modelled even better than in plain old VBA. A sequence object can be created that in turn

hold assay objects that also holds result objects. Beside the basic data holding some logic can be implemented or some properties can be extended and customized to special objects. A further benefit of having customized data objects (beans), is the fact that vaadin provides tables that can be filled with Java beans.

12.2 Marshalling

One key feature of porting the existing excel framework to activiti and Java is the marshalling and unmarshalling of the data objects. Being able to marshall an object into an xml file and sending it over a socket provides a powerful function to communicate with other programs that might even be written in an other programming language.

The ability to marshall objects is already implemented in the existing excel framework. So only the matching Java code has to be implemented. With the existing XSD definition it is possible to automatically create Java objects with the xjc [47] command line tool. These objects can then be used with the JAXB [48] classes to easily navigate through the XML data and creating the Java objects.

12.3 Compression

Before sending the xml to another socket over the network it is usually good to compress the data. In our case the standard inflation and deflation algorithm is used (zlib) [45]. After the compression the data bytes are encoded into base64 [46]. That allows a save transmission over the TCP/IP stack.

To check that the payload was successfully send over TCP/IP the length of the uncompressed string is prepended in front of the compressed data. This way when uncompressing the string, it can be checked if both have the same length.

The compression and the decompression classes have each an Java interface and a abstract class. This allows to implement different compression algorithms with the same basic code base. For example beside the zlib deflation zip which is used in the current excel application a gzip compression has also been created on top of the same abstract class.

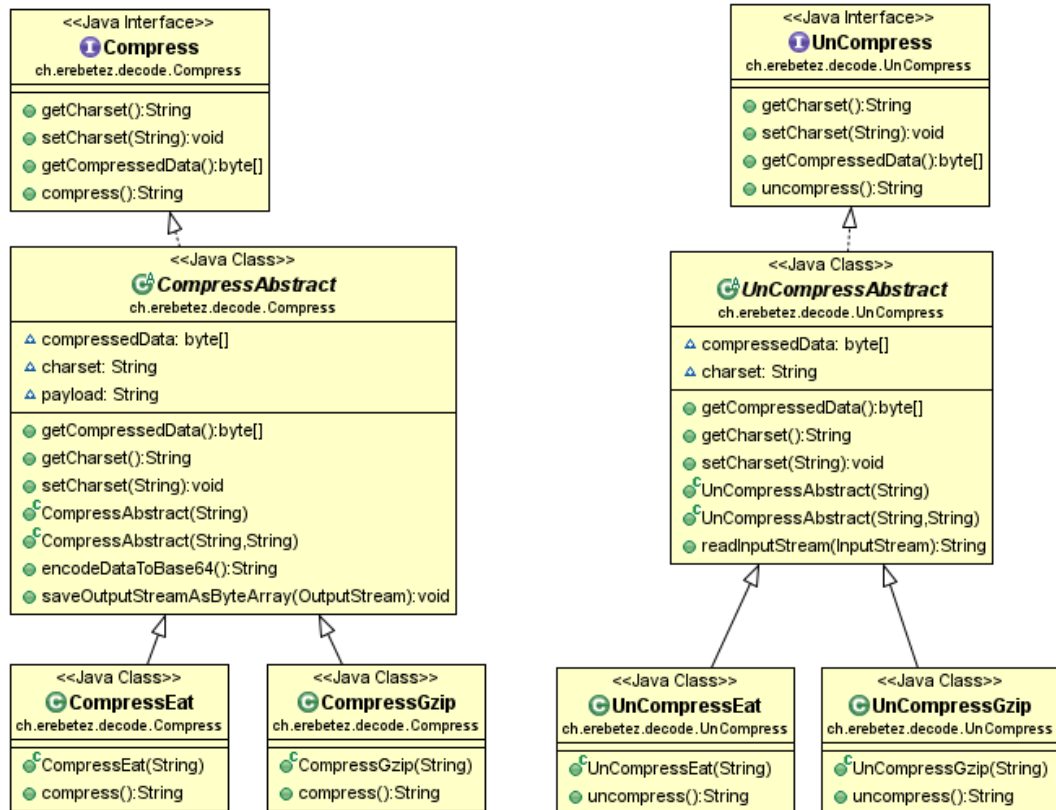


Figure 7: UML class structure of the compression classes

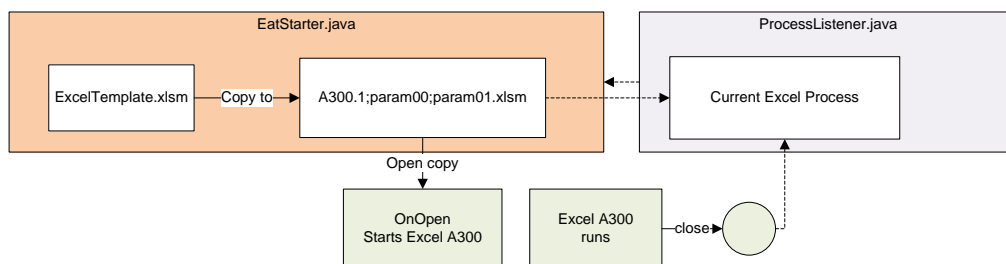


Figure 8: Process overview of the excel starter

12.4 excel adapter

In order to use the existing application stack based on excel, it is important to be able to start excel files from Java code. The excel adapter has two parts. One is the Java package and the other is a special excel spreadsheet.

The Java package takes some arguments starts the excel spreadsheet and gives a signal as soon as the excel process has finished.

The spreadsheet to start other excel applications has an on open method. In that method the the existing excel applications are started with the given parameter. The trick to start excel applications with parameter is by coping the template to a new location. The file name then represents the parameters which are separated by a separator.

A modification of the current Excel plug-in has to be made. Many functions can be removed because most logic is then done in the BPMN engine or in Java service task code.

13 Environments

At least three environments have to be defined. Development, validation and production.

The development environment is where the development is done. Usually the applications are run locally on the developer pc. The spring configurations can be modified at any time to match the need of the developer. For unit testing is also done at this stage.

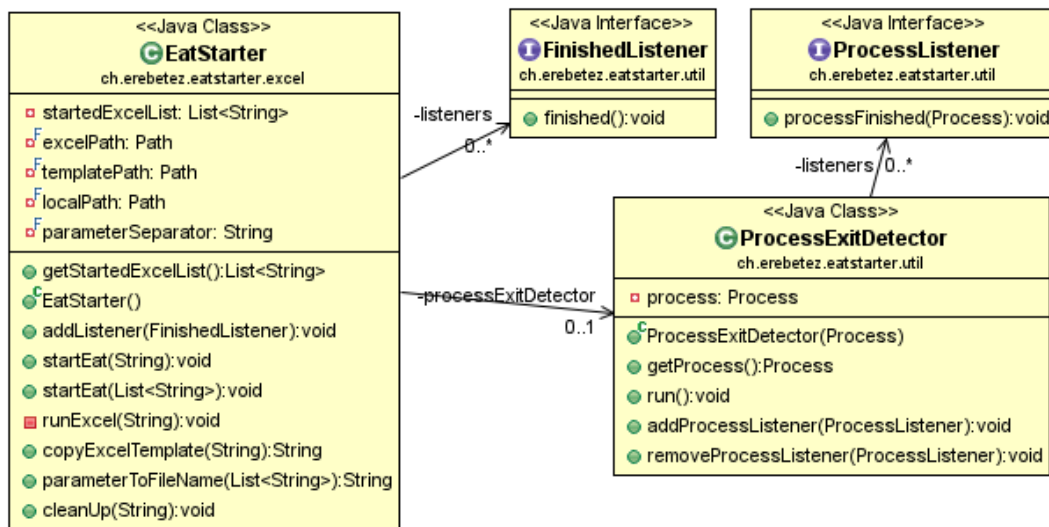


Figure 9: UML class structure of the excel starter

The validation environment should look and behave the same as the production environment. On the validation environment, the final builds are deployed. They then get tested. The formal testing is also done on the validation environment. If an error occurs during tests, a new build is created and deployed on the validation environment.

When everything looks good, a productive build based on the one from the validation environment is created and deployed on the productive environment.

Developer should also be able to pull data from the validation or productive server.

14 Build tools

The question what build tool, if any, came pretty early in the project development. Just starting a Project in Eclipse is the easiest way. At least as long as the project is not too big, is only one project and doesn't really change over time. That was all not the case. So let's have a look at a few of them.

In the Java World there are the usual suspects:

- Ant

- Maven
- Gradle

14.1 Ant

Ant is the oldest of the three. It allows to define build scripts in XML. It has no own logic, so all tasks or targets have to be written from scratch. That allows a big flexibility, it is however also quit complex. There is also the fact, that scripting in XML is not really fun.

14.2 Maven

Maven also uses also XML for the configuration. Opposed to ant, you define how the project has to be build. The building is then made by Maven. Maven also resolves dependencies. Maven is widely used and therefore has a lot of plug-ins and additional tools like an eclipse plug-in. For our case Maven seemed to do the job.

14.3 Gradle

Gradle is the newest member in the Java build tool family. Gradle is not just a Java build tool so i can also handle other languages. The configuration file is written in groovy. That makes a much nicer looking project definition. Gradle also doesn't reinvent the world. It uses the same dependency resolvment as maven. So it can almost do everything that maven can. In addition, it is easy to create custom tasks like in ant.

The downside is, that gradle is still a very young project and has not as much plug-ins or examples as maven. It is however worth keeping in sight.

14.4 Usage

For the main web application it is the simplest way to use maven as the build tool. Since gradle seems very promising, the plan is to use it in the smaller sub projects. That way it can be easily evaluated and maybe used as the main build tool in the future.

15 Testing and Validation

Testing and Validation is an very important subject. It begins already with the developer and goes all the way to the qc personnel. There are several strategies to be followed.

15.1 Unit Tests

Unit tests are an important tool during and after the development of the code. If possible each function and each class should also have his unit test. Unit tests are low level tests that can be run automatically. By writing unit tests it also forces the developer to create modular and well designed classes. The best practice is, to write the unit test first with all the requirements and then implement functionality until all tests passes. This is of course repeated task that goes on forever. The big advantage of unit tests is now, that if a change in the code should brake something, at least one unit test will most likely fail. The developer then also know where to look and fix the problem right away.

15.2 Validation Tests

Once the all functionality is implemented the packages and applications are build and deployed to the validation environment. The validation environment is configured as close as possible the same as the productive environment.

Know the testers can execute the written tests plans to check the high level functionality. This is also a formal test to conform to the regulations. If a error occurs the code gets modified in the development environment and redeployed. The tests are then repeated where needed.

If for example a component gets updated, the application that uses it has to be rebuild. Because the components can be tested very good with unit tests, the should already work correctly when deployed to the validation environment. The new package does then not have to be fully tested.

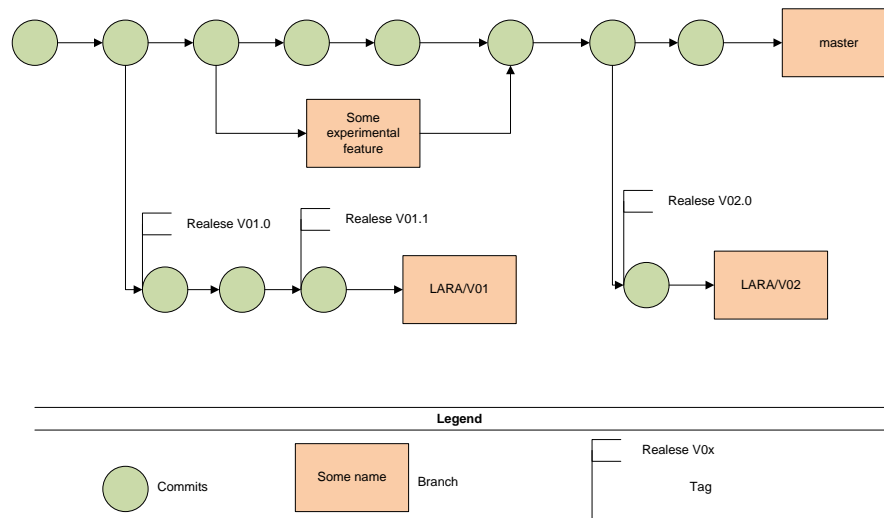


Figure 10: Concept of the git branches

16 Versioning

For the versioning of the source code there are several products available. Just to name a few of them: SVN, mercurial, git. During the development of the example git was used. It has a decentralised architecture. So every developer has always the full power of git at his disposal. It is also easy to create branches and to create labels for releases.

16.1 using git

In order that every user uses the branches the same way, a few ground rules have to be set. Each git repository will have at least three branches: productive, validation, and master.

Master is always the newest development branch. When the new feature is ready the changes are merged into the validation branch where they are tested. This validation branch gets the name of the new version. The only thing that has to be changed in the application configuration, is the database configura-

tion in the spring context files. The same has to be done when the productive package is about to be build. Since the configuration for the validation and productive environment can be in a separate file, the change is minimal. Only some imports in the spring context xml have to be changed.

Multiple git repository will be created. The following projects shall have a own repository.

- Web application
- External calculation Server
- The components

This way it is easier to manage branches and versions of each application.

17 Deployment

The deployment should be automated as much as possible to provide a consistent and reproducible build. Where possible the build scripts like maven or gradle should be used. In addition to them specific shell scripts can be created.

For the web application the following steps will be required.

- pack the war archive
- copy war archive to web application server
- update the BPMN process definition

The BPMN process definition a bit trickier. The XML resides in the methods jar archives. So they are in the war package. It is however needed to register them in the BPMN engine. This can be done with an extra program over an administration user interface. After the upload to the BPMN engine database the XML is stored in the database.

Processes started with the old process definition will finish with the definition they where started.

17.1 Maven repository

As maven repository the product nexus [40] from Sonatype is used. It is written in Java and can be deployed everywhere. It provides a nice web application to

manage the repositories. The web application runs on an simple jetty [41] application server.

Maven distinguishes two versions packages types snapshot and releases. During the development the version is suffixed by SNAPSHOT (i.e. 1.3.1-SNAPSHOT). This has the effect that, if such a package is put in the dependencies of an project, Maven will get the newest version of this SNAPSHOT. To force the update use `-U` as a parameter for maven.

```
mvn -U clean package
```

If the package is finally tested the SNAPSHOT suffix gets removed and the package gets uploaded to the releases repository. In this repository the version can only be uploaded once. The next time a new version number has to be created.

18 Infrastructure

This chapter shall give an overview how the infrastructure that supports the web application and the development of it, has to look. All named server are planed to be virtual machines.

It would have four servers.

- Web application server
- Database server
- Calculation server (excel, r)
- Repository server

18.1 Webb application server

This server is a classic web application server that can run war Archives. So it runs an Jee environment like jBoss [42] or tomcat [43]. The operating system is therefore not so relevant.

To keep things simple Linux was chosen for the example server. A Windows server would work just as well.

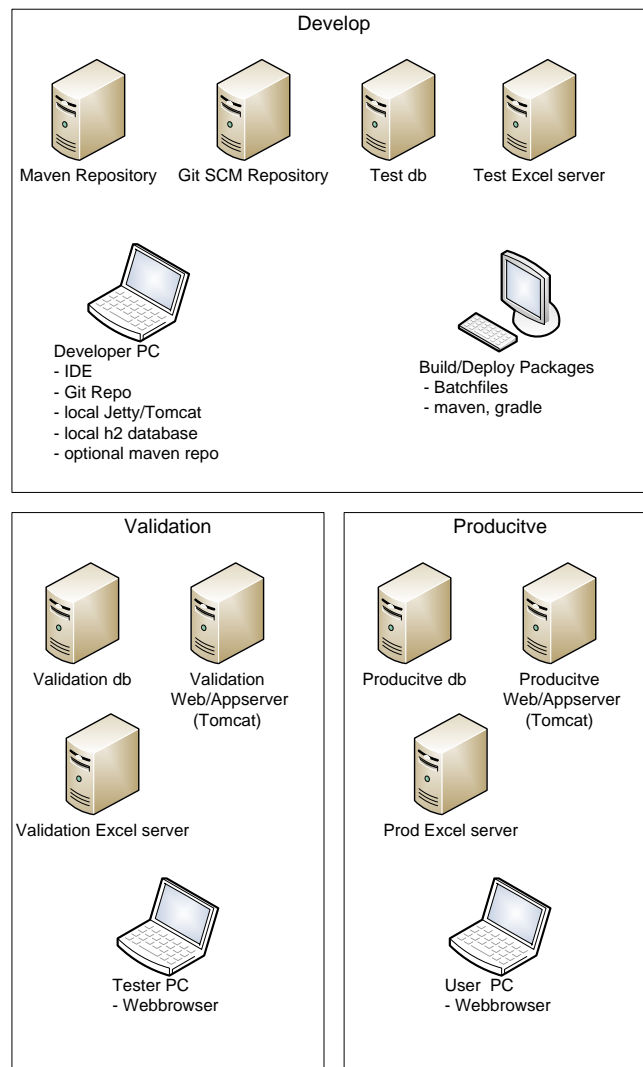


Figure 11: Infrastructure overview

18.2 Database server

The database server would be used to store the activiti data. The databases supported by activiti are mysql [36], oracle [38]. MSsql [39] is yet in experimental state.

For the example a Linux server with a mysql database was setup. To manage the database phpmyadmin [37] is used.

Since the database is configured in the web application with spring, it is very easy to change the used database.

18.3 Calculation server

This is a rather exotic configuration. This server should be able to run excel. Therefore windows is the only option as the operating system. On this server there will also run the calculation server (Java) which listens to the query of an activiti task.

18.4 Repository server

This server would not be used in the productive setting. It is just there to facilitate the developers work. The server would provide a maven repository and a git repository.

The operating system would be preferably Linux. That is because git is native to Linux. For the maven repository nexus from Sonatype would be a nice choice. It supports all necessary functions and provides a nice web front-end for managing the repositories.

19 Conclusion

First it is really worth to look around and see what solutions are already available. The BPMN 2.0 standard and the engines that can run it is a fine idea and very precious for any type of business. It has a big advantage of being able to design the business process and at the same time having an easy way to make it automated in a system. At this point it must be said, that the implementations still require specialised employees that should also be able

to read some xml. The BPMN engine should also not being misused for low level tasks. At some point it is smarter to make the easy logic in an service task instead of creating yet another BPMN sup process.

19.1 Future

Once the process engine is in place, the functionality that is currently implemented in excel can be migrated step by step to Java service tasks or script tasks. The goal is that finally only the some calculation have to be made in excel.

References

- [1] http://en.wikipedia.org/wiki/Laboratory_information_management_system
- [2]
- [3] http://en.wikipedia.org/wiki/Good_manufacturing_practice
- [4] http://en.wikipedia.org/wiki/Electronic_lab_notebook
- [5] <http://office.microsoft.com/en-us/excel>
- [6] http://en.wikipedia.org/wiki/Business_Process_Execution_Language
- [7] <http://www.bpmn.org/>
- [8] http://en.wikipedia.org/wiki/Service-oriented_architecture
- [9] <http://en.wikipedia.org/wiki/Middleware>
- [10] <http://www.omg.org/>
- [11] <http://www.activiti.org/>
- [12] http://en.wikipedia.org/wiki/Cascading_Style_Sheets
- [13] <http://activiti.org/javadocs/index.html>
- [14] <https://www.jboss.org/jbpm/>
- [15] <http://www.activevos.com/>
- [16] <http://www.activevos.com/content/blog/activevos2009butlergrouptechnicalaudit.pdf>
- [17] <https://ode.apache.org/>
- [18] <https://www.softwareag.com/ch/products/wm/bpm/default.asp>
- [19] <http://gothamschools.org/2010/09/15/frustrated-with-citys-data-system-teachers-build-their-own/>
- [20] <http://www.microsoft.com/biztalk>
- [21] <http://www.microsoft.com/biztalk/en/us/pricing-licensing.aspx>
- [22] <http://www.signavio.com/en.html>

- [23] <http://www.eclipse.org>
- [24] http://en.wikipedia.org/wiki/Remote_Procedure_Call
- [25] http://en.wikipedia.org/wiki/Thread_safety
- [26] http://en.wikipedia.org/wiki/Universally_unique_identifier
- [27] <http://www.vaadin.com>
- [28] [https://vaadin.com/wiki/-/wiki/Main/
BuildingVaadinApplicationsontopofActiviti](https://vaadin.com/wiki/-/wiki/Main/BuildingVaadinApplicationsontopofActiviti)
- [29] <https://github.com/peholmst/ActivitiVaadinDevoox11>
- [30] <https://ant.apache.org/>
- [31] <https://maven.apache.org/>
- [32] <http://www.gradle.org/>
- [33] <http://www.springsource.org/>
- [34] http://en.wikipedia.org/wiki/Dependency_injection
- [35] <https://vaadin.com/wiki/-/wiki/Main/Spring+Integration>
- [36] <https://www.mysql.com/>
- [37] http://www.phpmyadmin.net/home_page/index.php
- [38] <http://www.oracle.com/de/products/database/index.html>
- [39] <http://www.microsoft.com/sqlserver/en/us/default.aspx>
- [40] <http://www.sonatype.org/nexus/>
- [41] <http://jetty.codehaus.org/jetty/>
- [42] <http://www.jboss.org/>
- [43] <http://tomcat.apache.org/>
- [44] <http://git-scm.com/>
- [45] <http://zlib.net/>
- [46] <http://en.wikipedia.org/wiki/Base64>
- [47] [http://docs.oracle.com/javase/6/docs/technotes/tools/share/
xjc.html](http://docs.oracle.com/javase/6/docs/technotes/tools/share/xjc.html)

- [48] <http://www.oracle.com/technetwork/articles/javase/index-140168.html>