Отчёт по индивидуальному проекту этап 3

Ерфан Хосейнабади

Содержание

Цель работы **5**

Задание **6**

Выполнение лабораторной работы **7**

Выводы **10**

Список иллюстраций

1 Загружаю список паролей. 7
2 DVWA — домашняя страница 7
3 информация по hydra 8
4 пароль 9
5 Проверка 9

Список таблиц

Цель работы

Цель работы — получить практические навыки использования Hydra для подбора паролей (брутфорса).

Задание

Реализовать атаку на уязвимость, используя брутфорс (подбор паролей).

Выполнение лабораторной работы

Перед началом работы я подготовила список часто встречающихся паролей. Проверяю, что список на месте, и продолжаю работу.

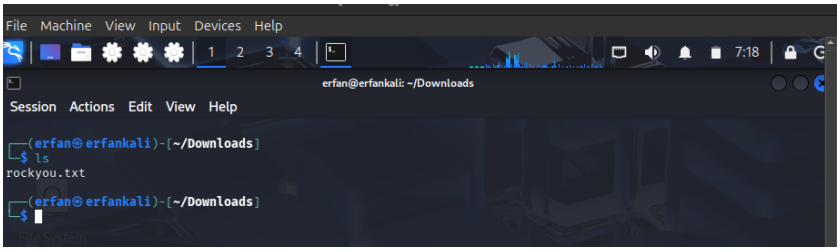

Рис. 1. Загружаю список паролей.

Затем вхожу в аккаунт DVWA, который создала в предыдущей работе, и перехожу в раздел Brute Force.

Рис. 2. DVWA — домашняя страница

Использую команду man, чтобы изучить справку Hydra и разобраться в её работе. Для выполнения задачи мне нужны опции -l (указывает логин) и -p (указывает пароль).

```
HYDRA(1)                    General Commands Manual

NAME
       hydra - a very fast network logon cracker which supports many different services

SYNOPSIS
       hydra
        [[[-l LOGIN|-L FILE] [-p PASS|-P FILE|-x OPT -y]] | [-C FILE]]
        [-e nsr] [-u] [-f|-F] [-M FILE] [-o FILE] [-b FORMAT]
        [-t TASKS] [-T TASKS] [-w TIME] [-W TIME] [-m OPTIONS] [-s PORT]
        [-c TIME] [-S] [-O] [-4|6] [-I] [-vV] [-d]
        server service [OPTIONS]

DESCRIPTION
       Hydra  is a parallelized login cracker which supports numerous protocols to attack. New modules are easy
       to add, beside that, it is flexible and very fast.

       This tool gives researchers and security consultants the possibility to show how easy  it  would  be  to
       gain unauthorized access from remote to a system.

       Currently this tool supports:
              adam6500   afp   asterisk  cisco  cisco-enable  cvs  firebird  ftp  ftps  http[s]-{head|get|post}
              http[s]-{get|post}-form http-proxy http-proxy-urlenum icq imap[s] irc  ldap2[s]  ldap3[-{cram|di-
              gest}md5][s]  mssql  mysql(v4) mysql5 ncp nntp oracle oracle-listener oracle-sid pcanywhere pcnfs
              pop3[s] postgres rdp radmin2 redis rexec rlogin rpcap rsh rtsp s7-300 sapr3 sip smb smtp[s] smtp-
              enum snmp socks5 ssh sshkey svn teamspeak telnet[s] vmauthd vnc xmpp

       For most protocols SSL is supported (e.g. https-get, ftp-ssl, etc.).  If not all necessary libraries are
       found during compile time, your available services will be less.  Type "hydra" to see what is available.

Options
       target a target to attack, can be an IPv4 address, IPv6 address or DNS name.

       service
              a service to attack, see the list of protocols available

       OPTIONAL SERVICE PARAMETER
              Some modules have optional or mandatory options. type "hydra -U <servicename>"
                to get help on on the options of a service.

       -R     restore a previously aborted session. Requires a hydra.restore file was written. Options are  re-
              stored, but can be changed by setting them after -R on the command line

       -S     connect via SSL

       -O     use old SSL v2 and v3

       -s PORT
              if the service is on a different default port, define it here

       -l LOGIN
              or -L FILE login with LOGIN name, or load several logins from FILE

       -p PASS
              or -P FILE try password PASS, or load several passwords from FILE

       -x min:max:charset
```

Рис. 3. информация по hydra

Выполняю подбор пароля для пользователя admin с помощью файла rockyou.txt. Использую GET-запрос, передавая параметры cookie и PHPSESSID. При указании опции -P программа показывает подобранный пароль и путь к файлу со списком паролей (home/mwakutaipa/rockyou.txt)

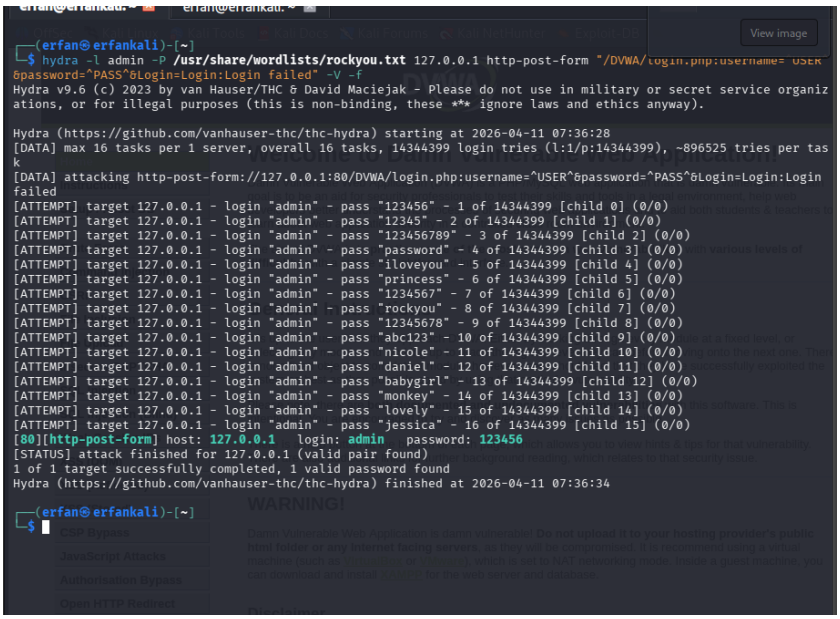

Рис. 4. пароль

Использую найденный пароль для входа в систему, чтобы убедиться, что пароль верный.

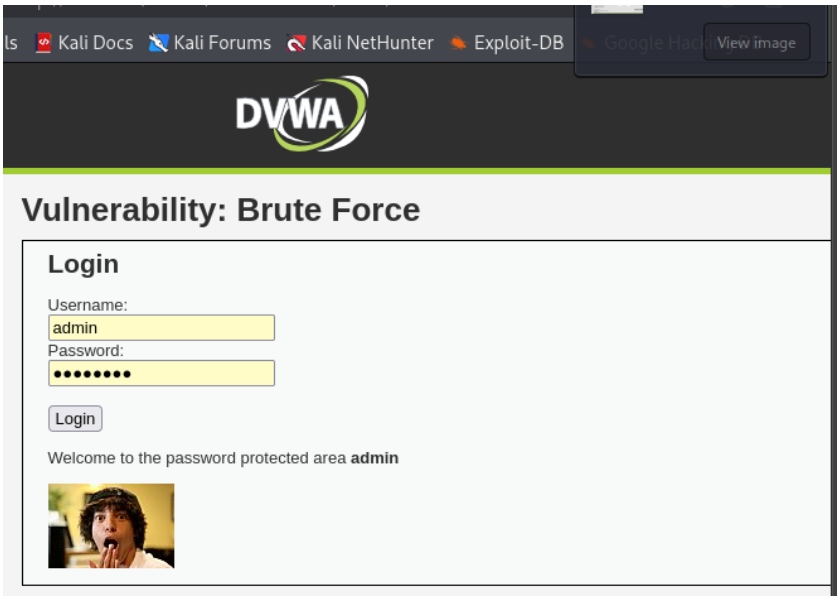

Рис. 5. Проверка

Выводы

В результате выполнения работы я получила практические навыки использования Hydra для подбора паролей (брутфорса).