


Monkey M | 2008-05-06 | channel 1


monkeyM_session-o080506002-22_lfp-1

198 short-delay trials = 33 per direction | final 500 ms before GO
Five held-out folds: 40, 40, 40, 39, 39 test trials; 158-159 training trials.


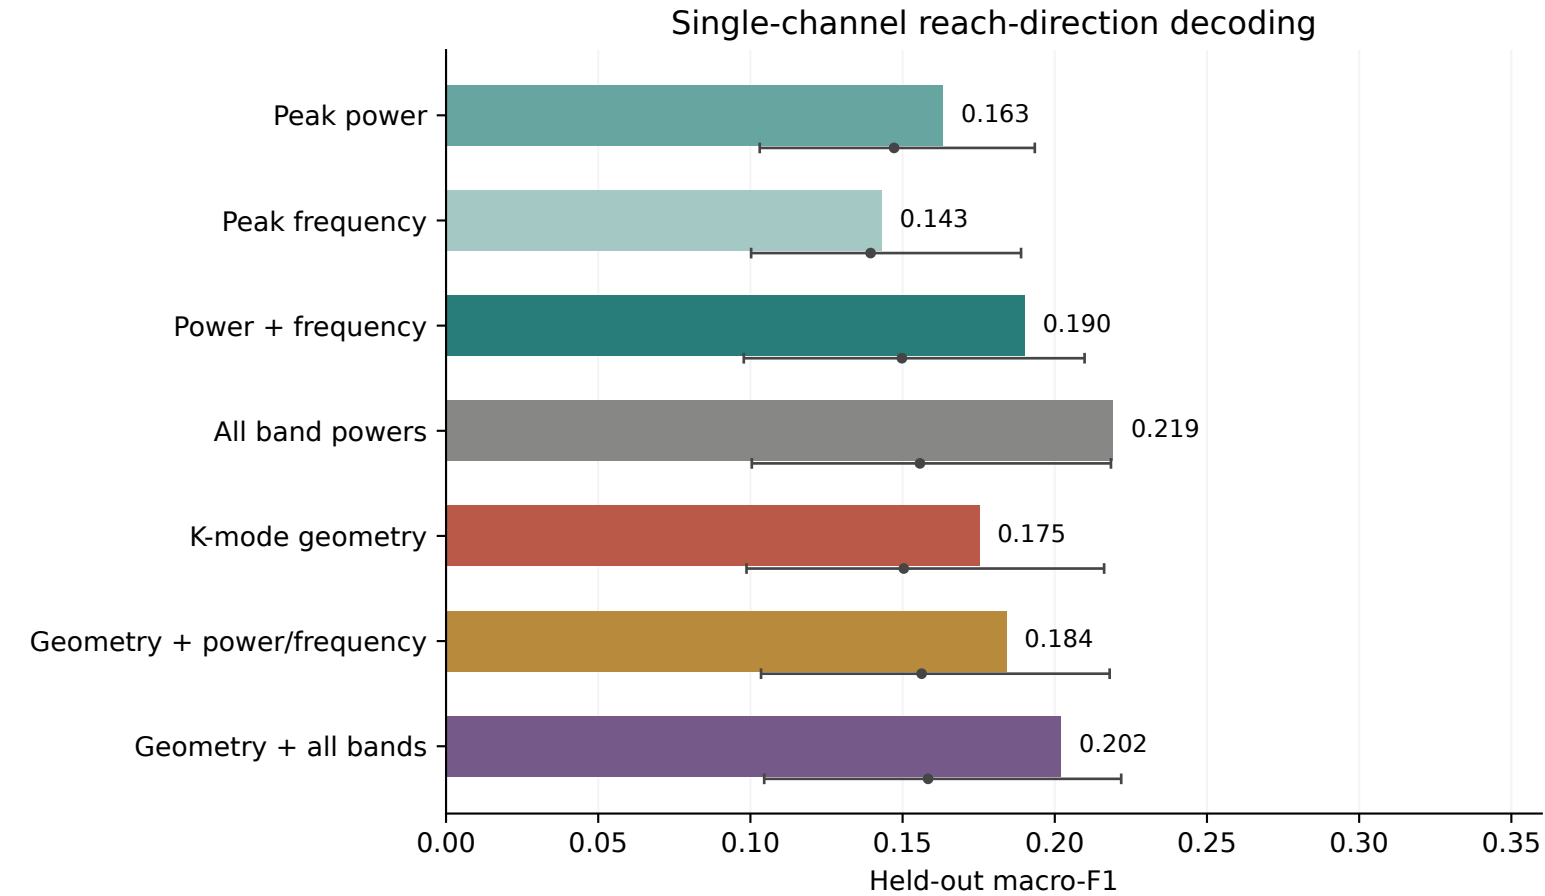


Bars: macro-F1 from all held-out predictions. Gray dots/ranges: median and central 95% of 200 saved label-shuffle scores, not confidence intervals. Geometry is the earlier K-mode shape-matrix representation, not the 15-feature tube fit and not an OLS-derived decoder.



Monkey M | 2008-05-06 | channel 1 | held-out confusion matrices

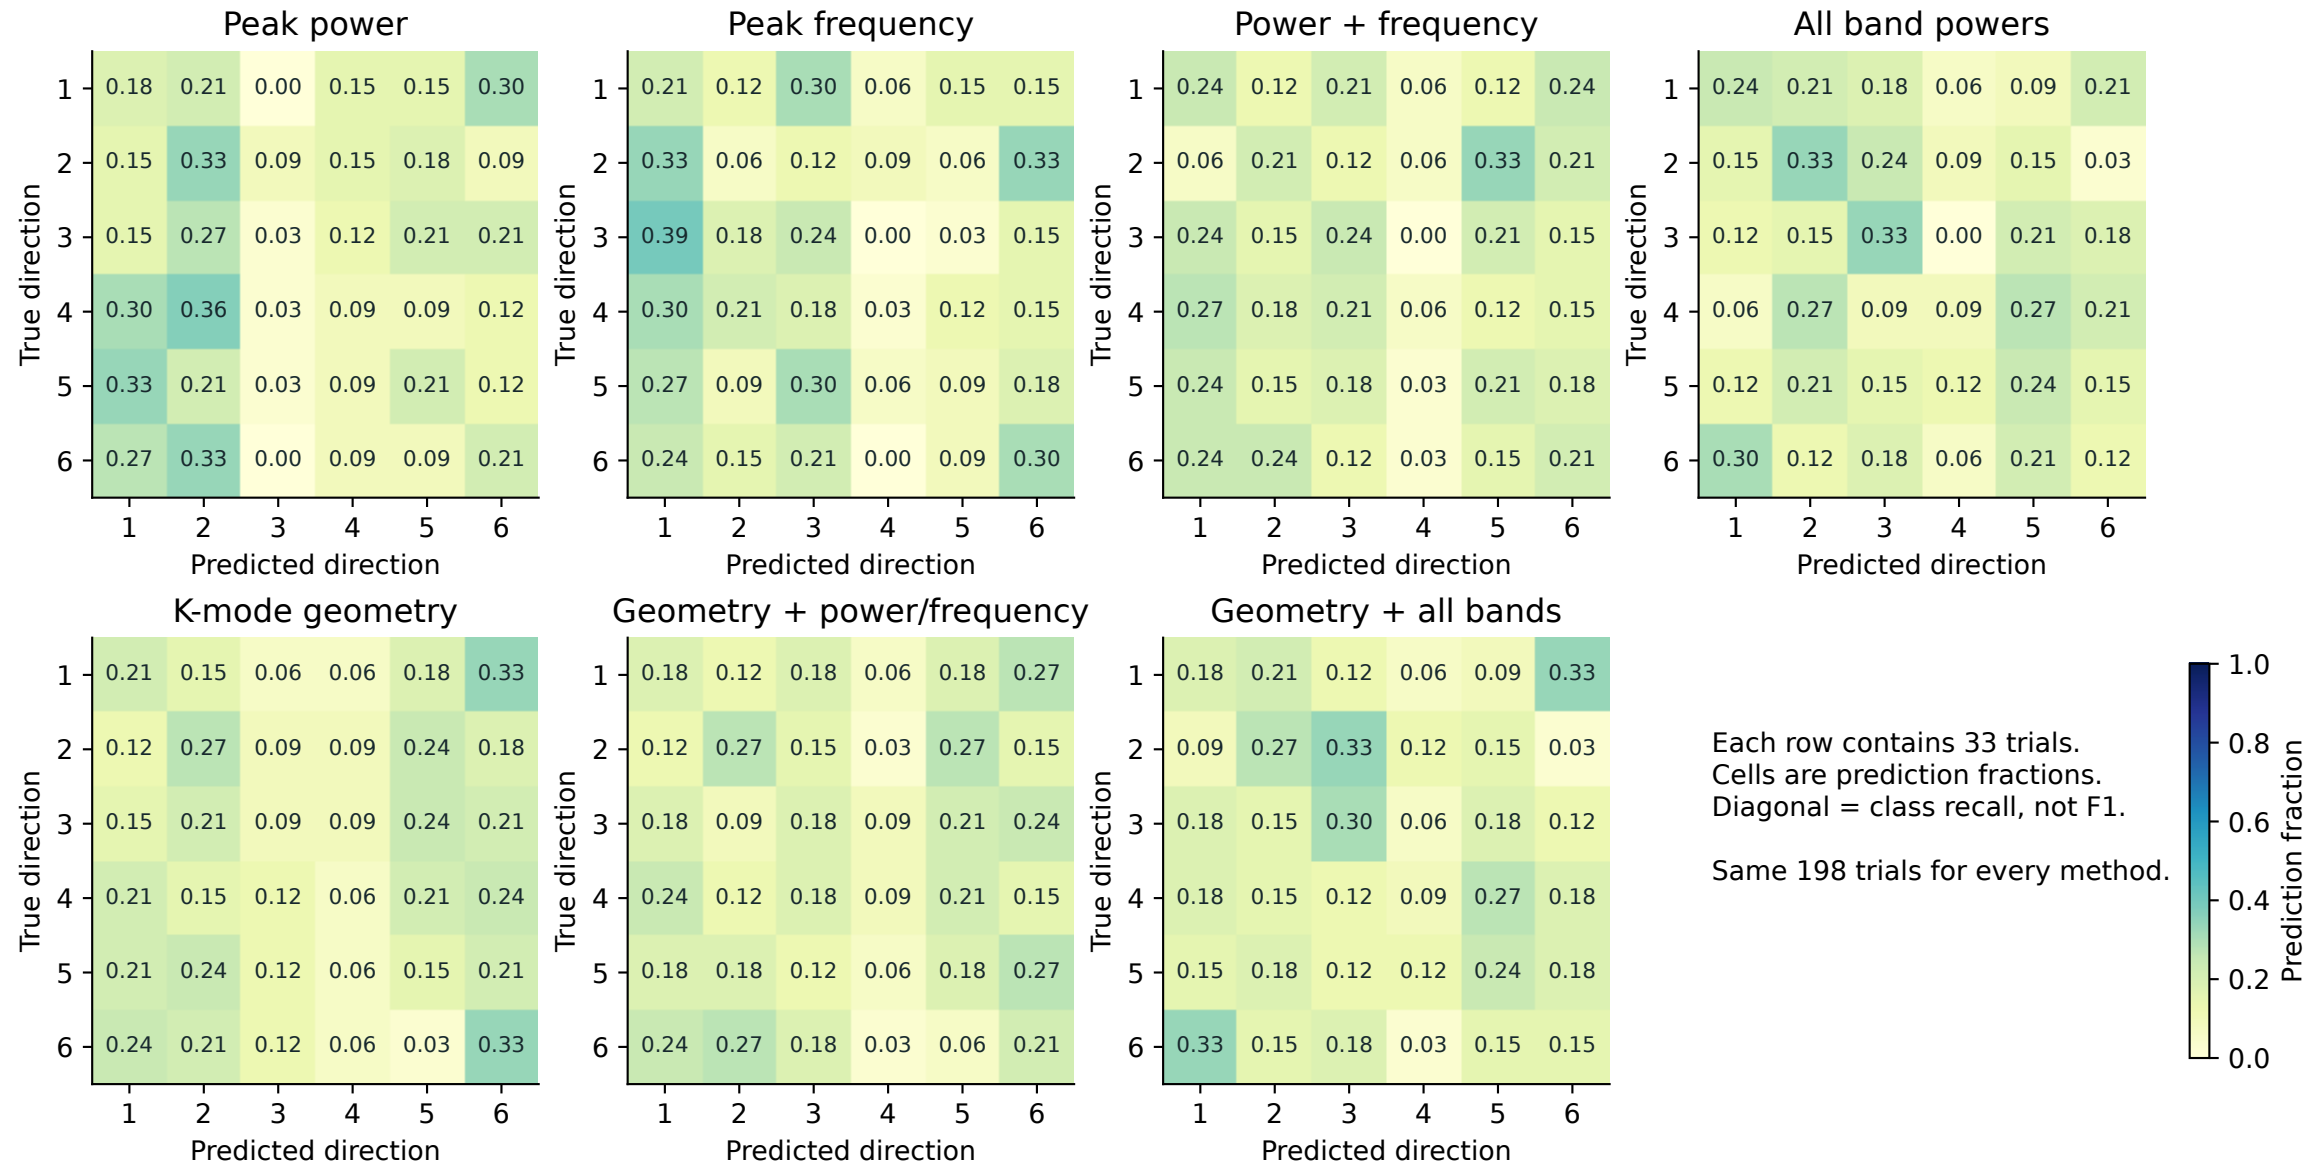

Monkey M | 2008-05-06 | channel 1 | direction scores and fit quality

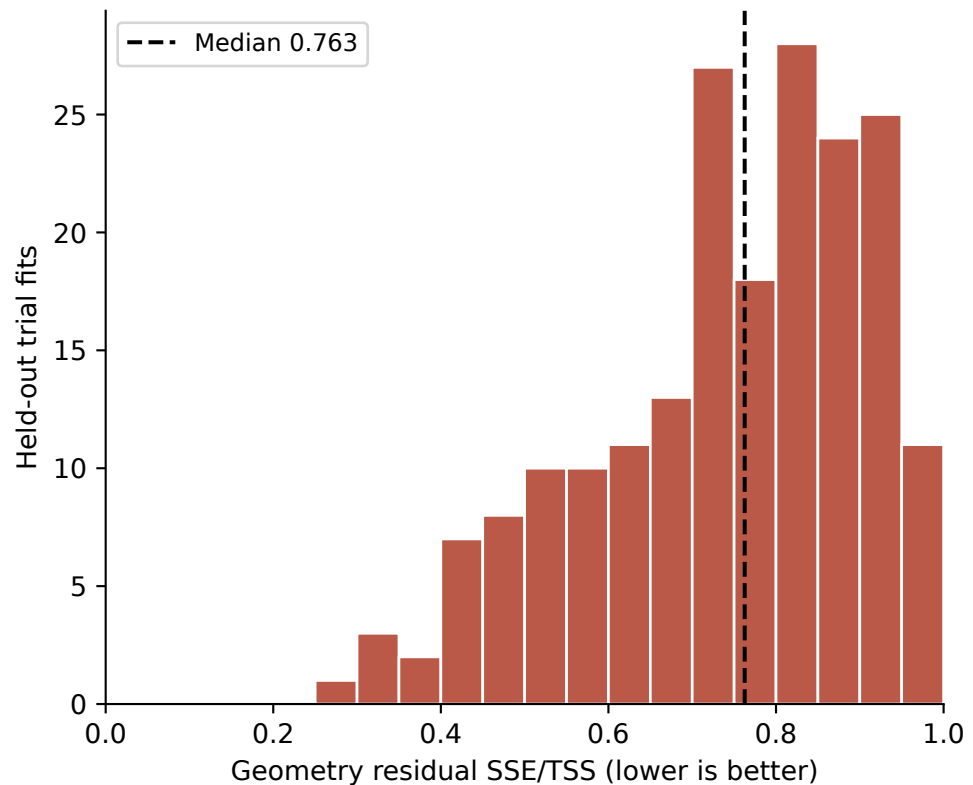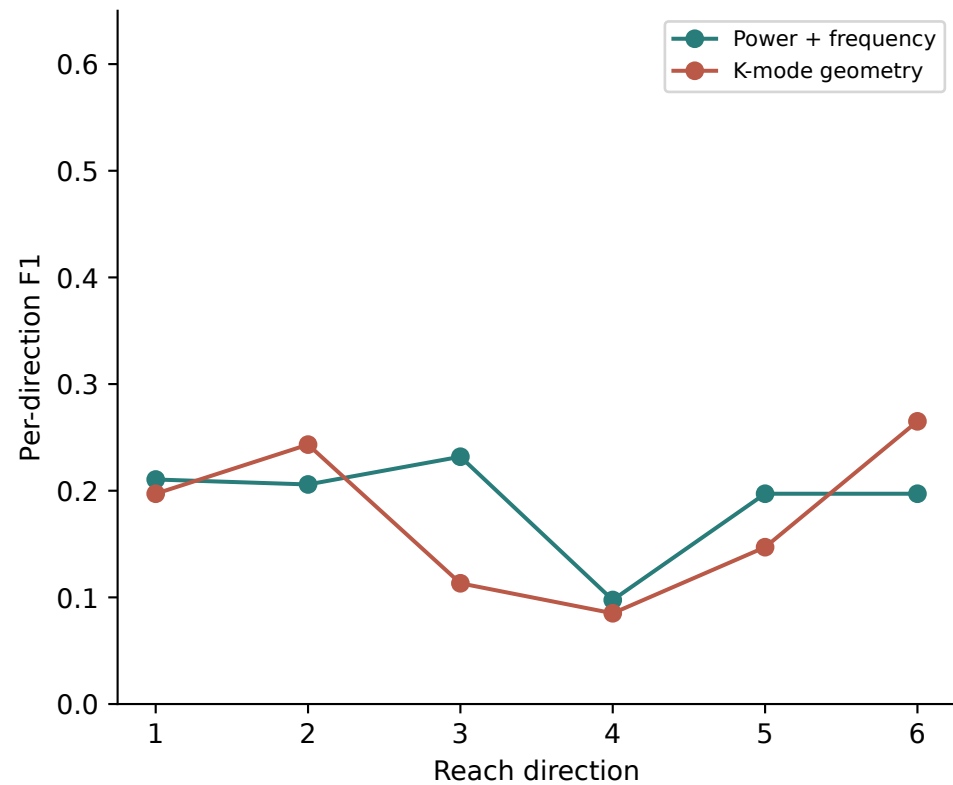


Monkey M | 2008-05-06 | channel 1 | earlier decoder: training-only PSD and delay selection

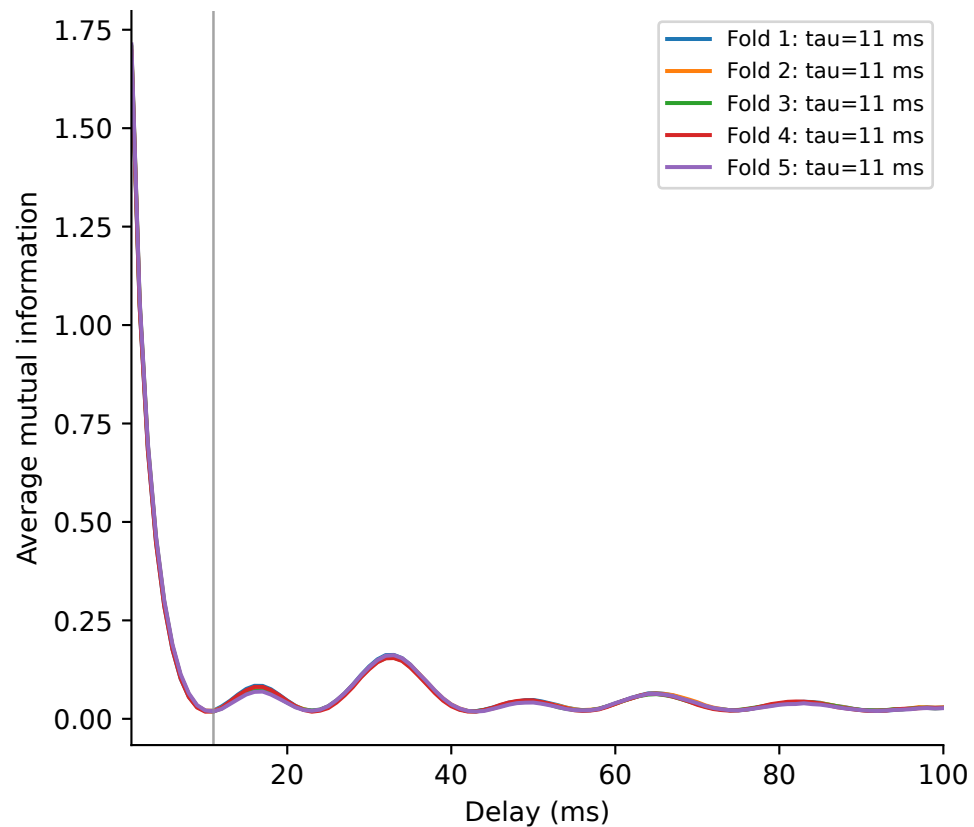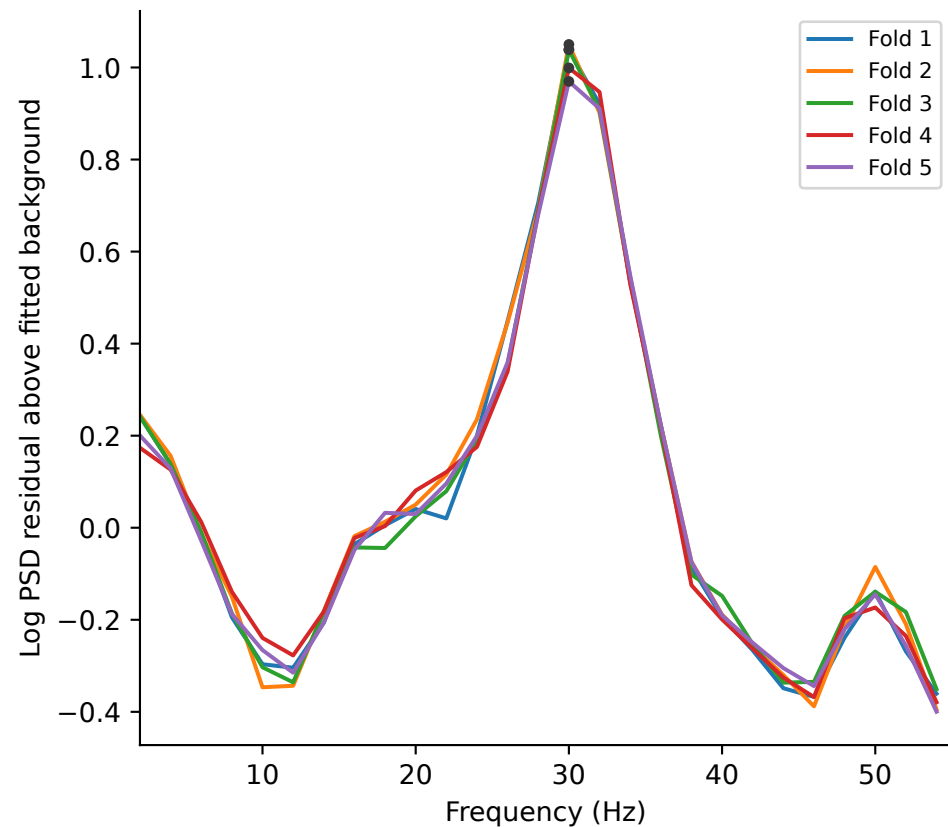


Monkey M | 2008-05-06 | channel 1 | one held-out trial per direction


Direction 1 | trial 20

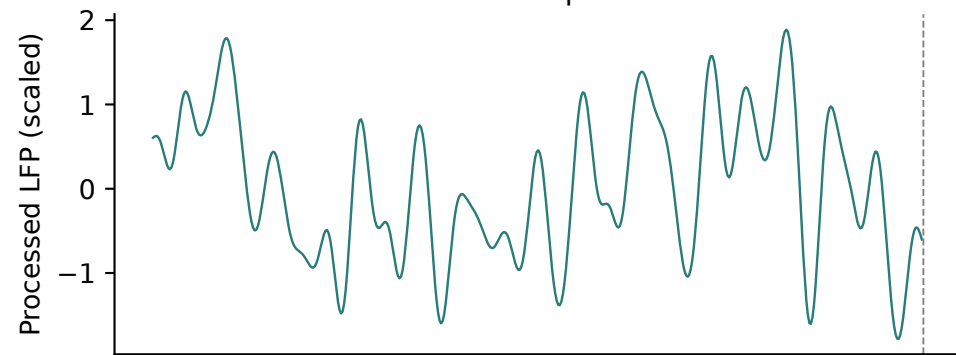

Direction 2 | trial 13

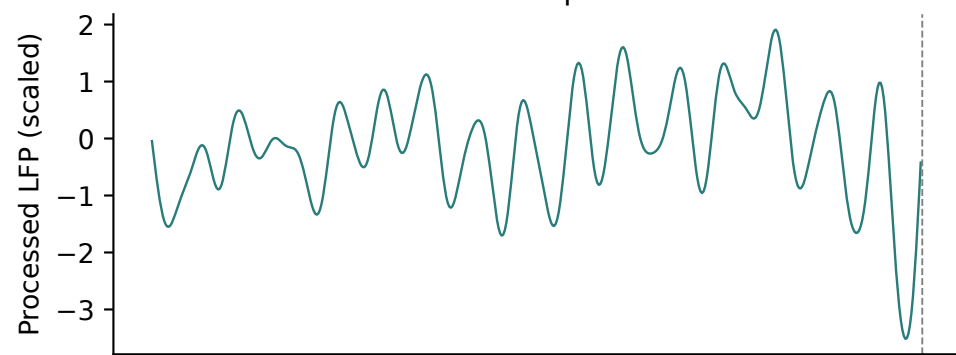


Direction 3 | trial 72

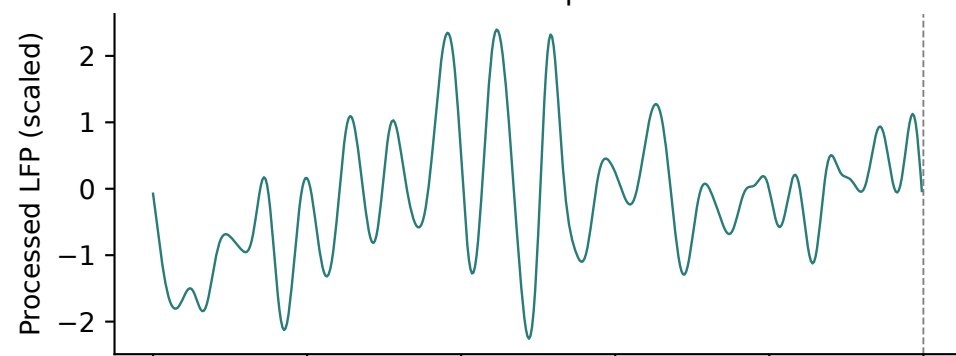


Direction 4 | trial 14



Direction 5 | trial 137

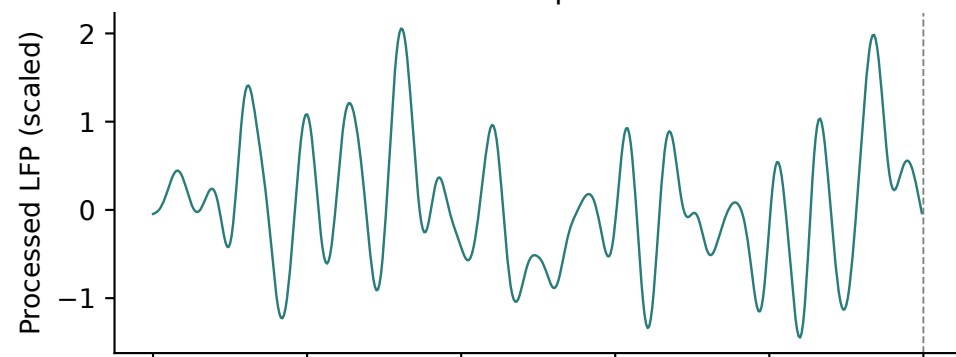

Direction 6 | trial 145

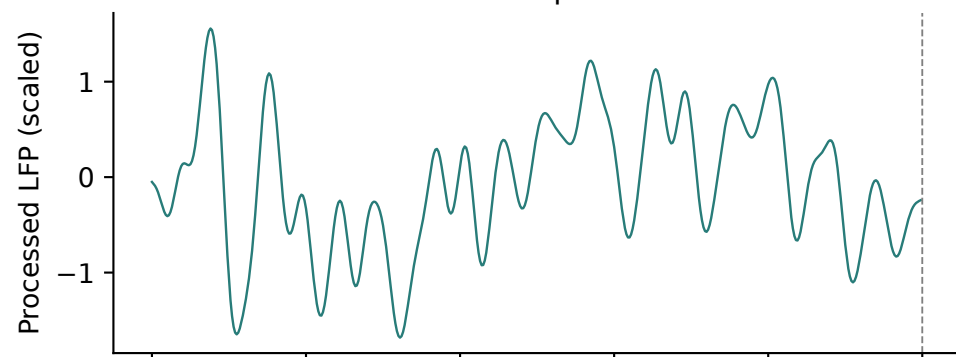


Time before GO (ms)

Time before GO (ms)

Monkey M | o080506002-22 | LFP 1

1-ms one-step

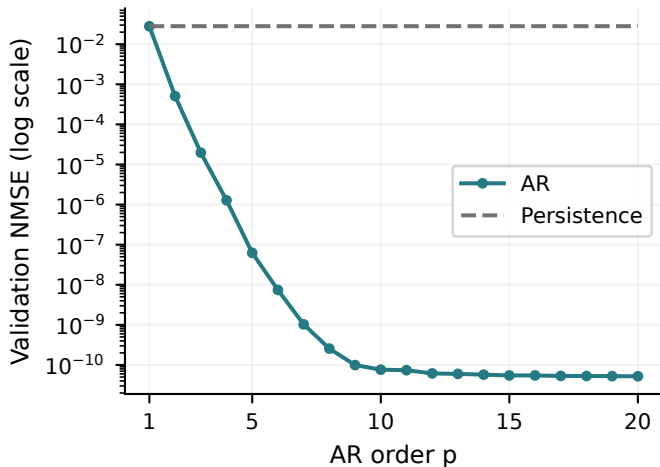

10-ms recursive

