


Monkey T | 2007-03-16 | channel 8


monkeyT_session-y070316009-12_lfp-8

198 short-delay trials = 33 per direction | final 500 ms before GO
Five held-out folds: 40, 40, 40, 39, 39 test trials; 158-159 training trials.


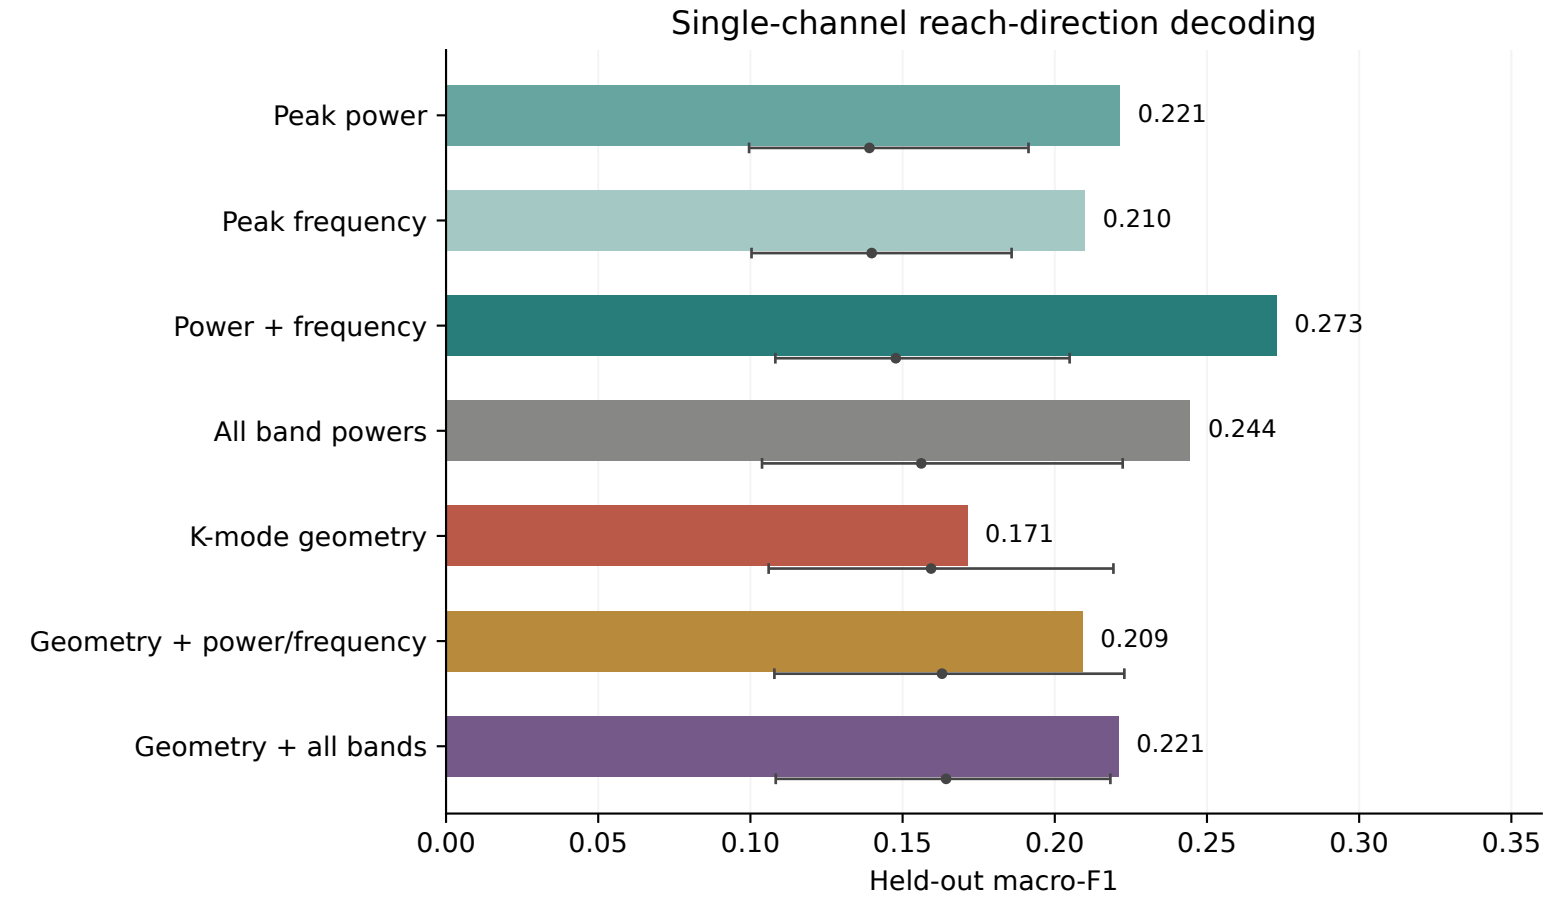


Bars: macro-F1 from all held-out predictions. Gray dots/ranges: median and central 95% of 200 saved label-shuffle scores, not confidence intervals. Geometry is the earlier K-mode shape-matrix representation, not the 15-feature tube fit and not an OLS-derived decoder.



Monkey T | 2007-03-16 | channel 8 | held-out confusion matrices

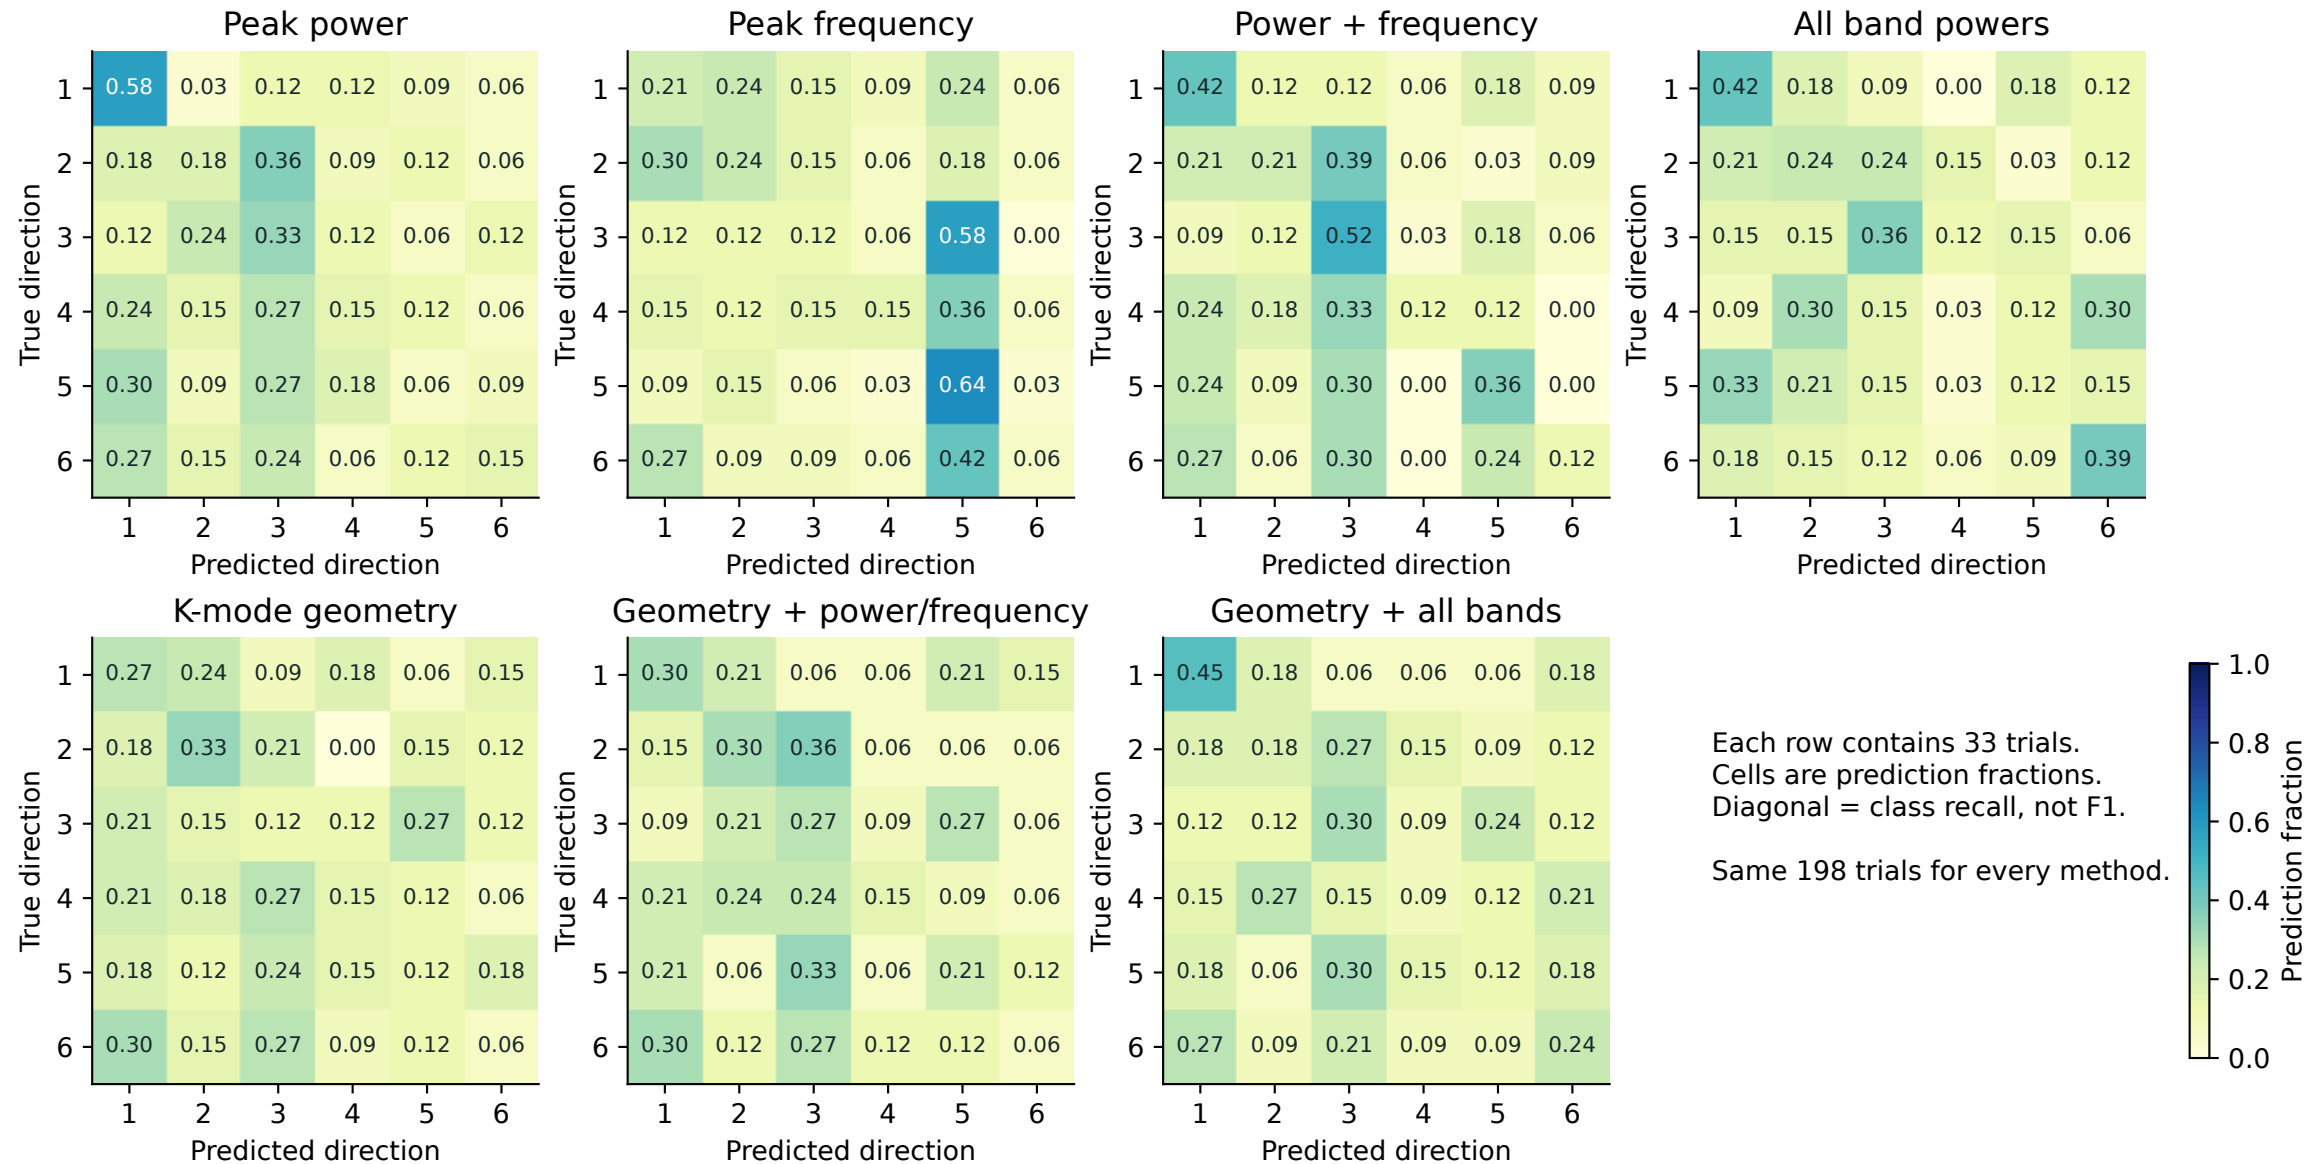

Monkey T | 2007-03-16 | channel 8 | direction scores and fit quality

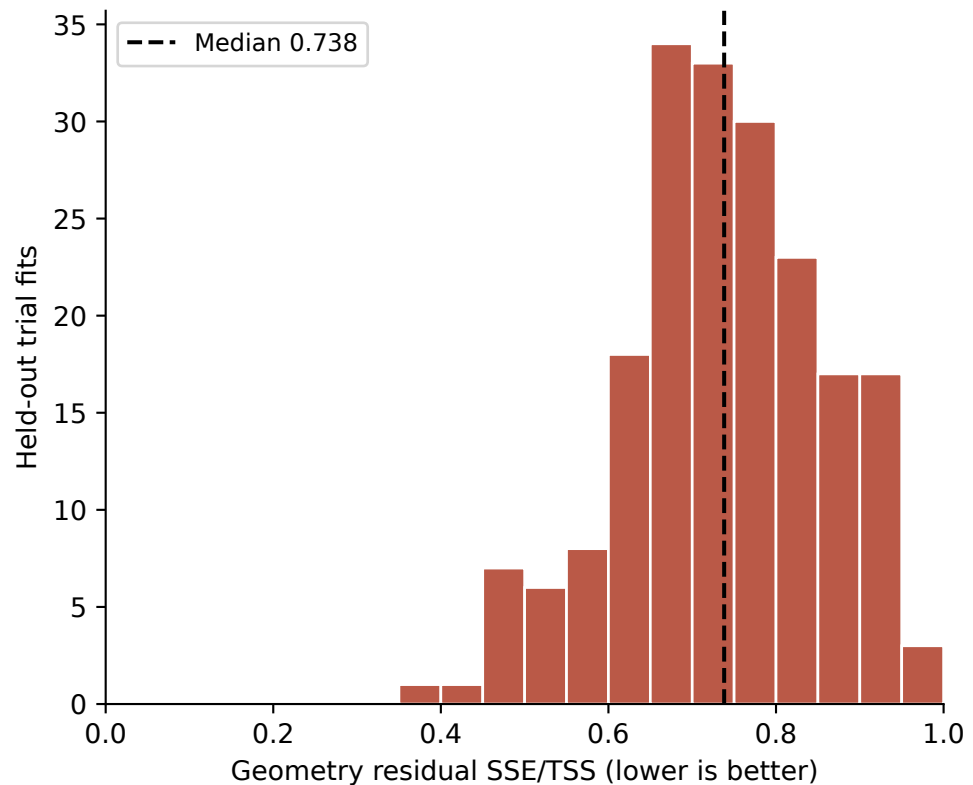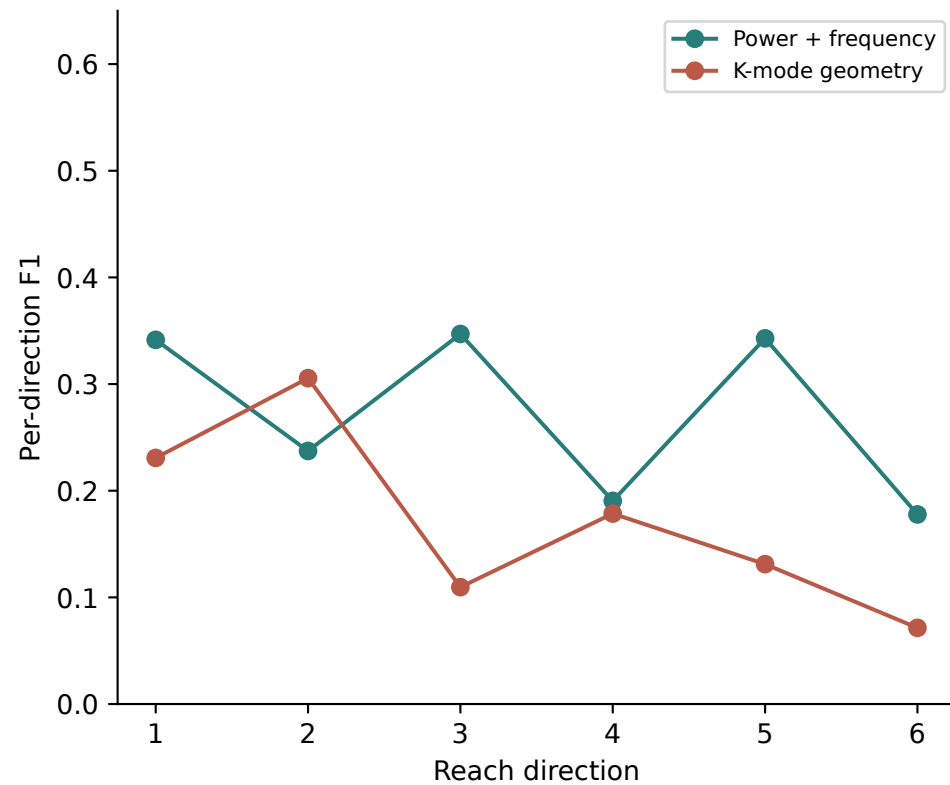


Monkey T | 2007-03-16 | channel 8 | earlier decoder: training-only PSD and delay selection

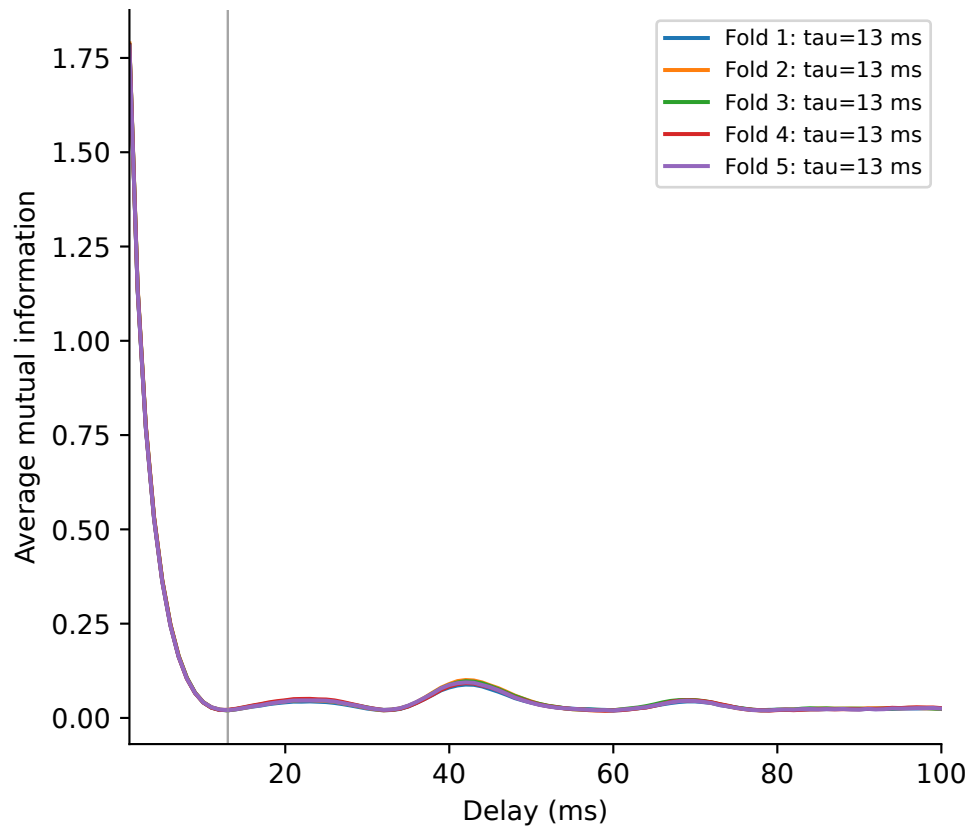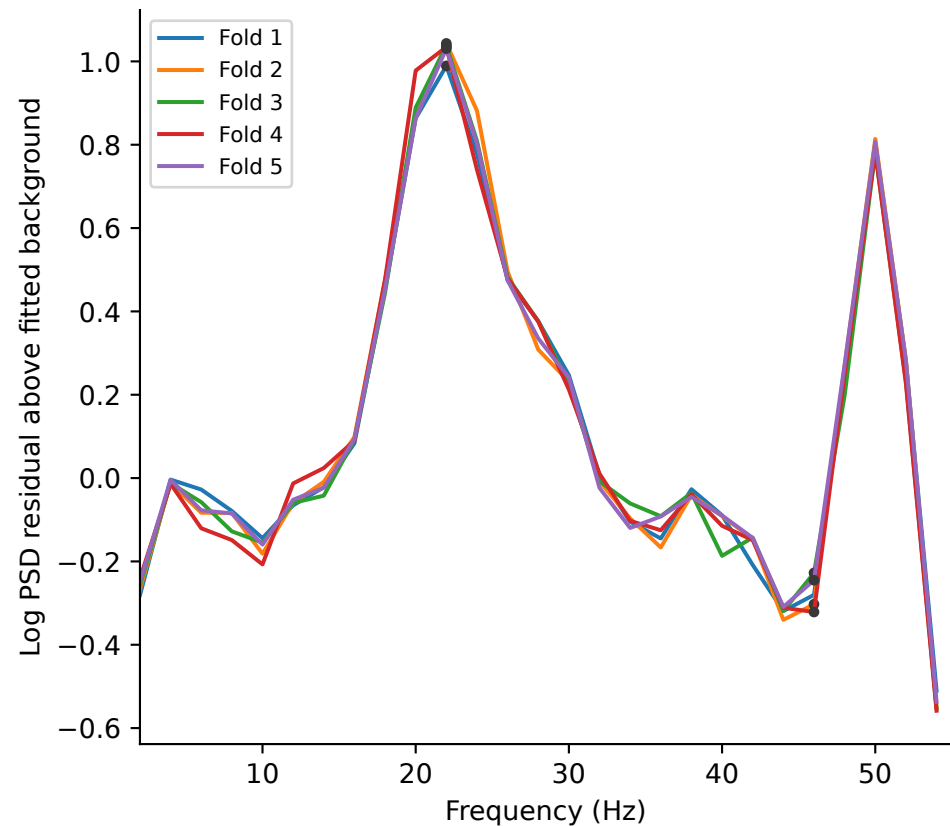


Monkey T | 2007-03-16 | channel 8 | one held-out trial per direction


Direction 1 | trial 56

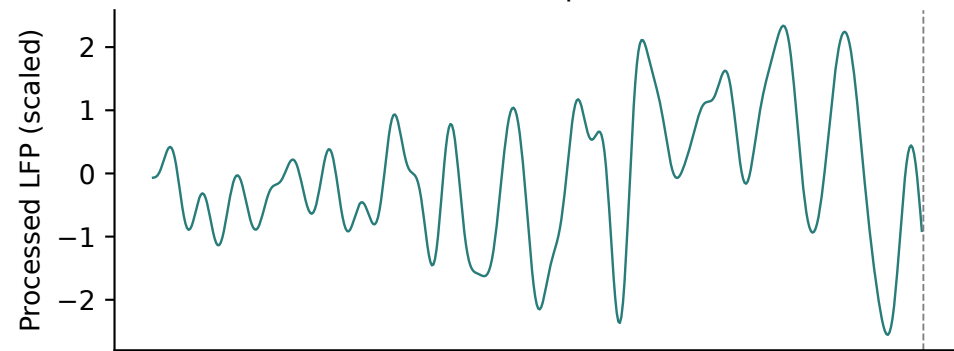


Direction 2 | trial 34

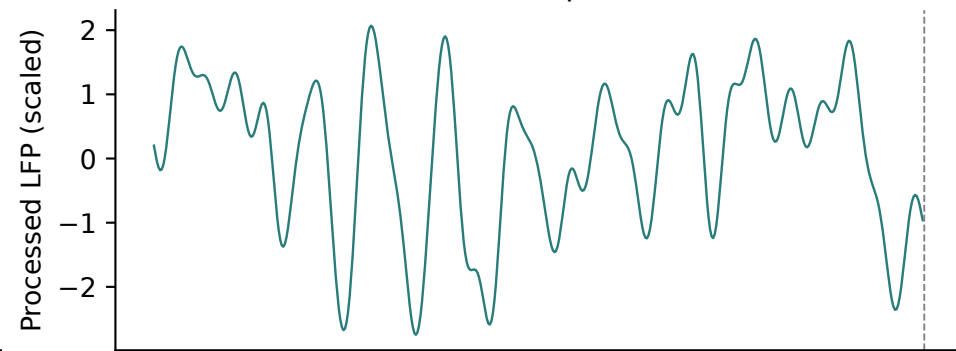


Direction 3 | trial 14

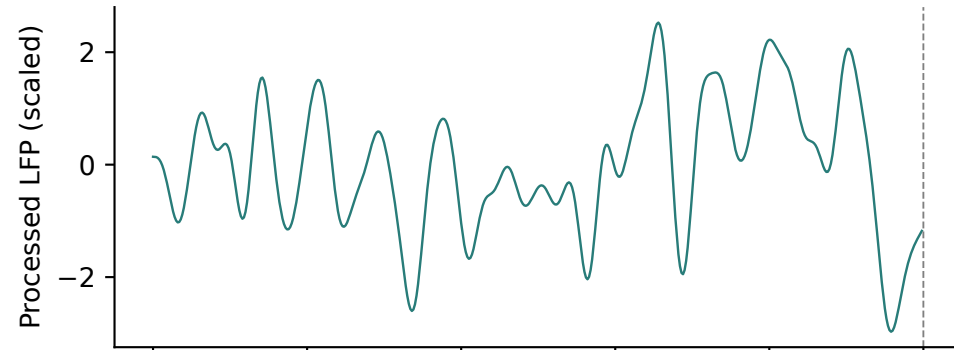


Direction 4 | trial 17

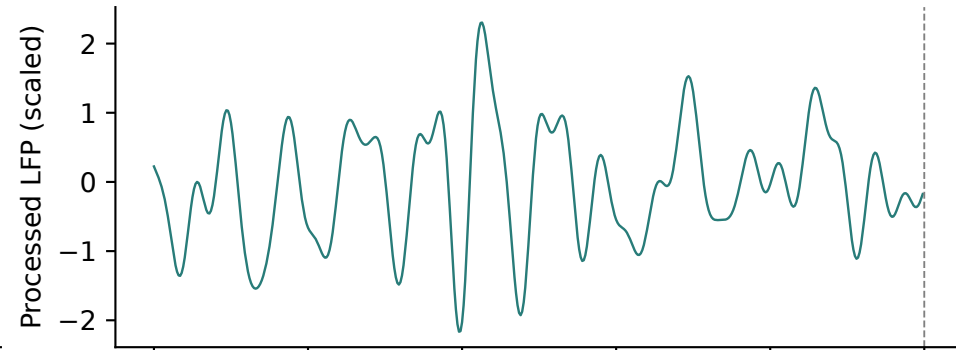

Direction 5 | trial 164

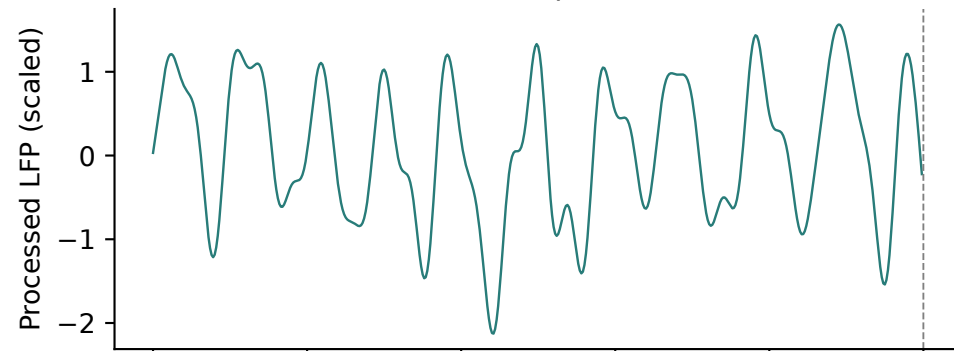

Direction 6 | trial 100

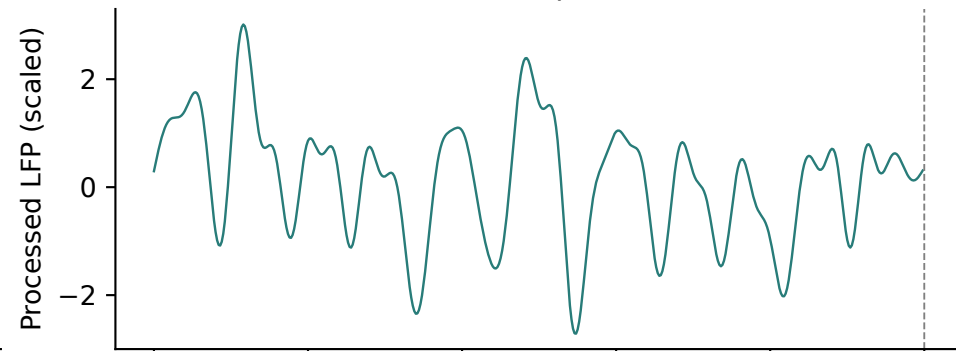


Time before GO (ms)

Time before GO (ms)

Monkey T | y070316009-12 | LFP 8

1-ms one-step

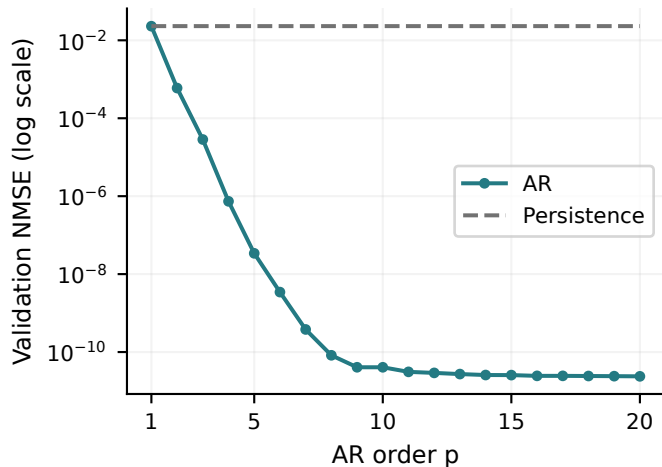

10-ms recursive

