

```
In [58]: import pandas as pd
import matplotlib.pyplot as plt
import numpy as np
```

```
In [59]: # Load the Excel file
excel_file = pd.ExcelFile('E:\Derivatives Trading\TAIEX derivatives trading record.

# Get the sheet you want to read
sheet_name = 'ForPython' # Replace with the name of the sheet you want to read
df = excel_file.parse(sheet_name)
```

```
In [60]: # Output data information
print(df.head())
```

	Date	PnL Index	TAIEX	VIX	Returns	Unnamed: 5	Unnamed: 6	\
0	2022-07-01	100.000000	14343.08	27.01	0.000000	NaN	NaN	
1	2022-07-04	95.577858	14217.06	27.56	-0.044221	NaN	NaN	
2	2022-07-05	93.953178	14349.20	27.18	-0.016998	NaN	NaN	
3	2022-07-06	92.057052	13985.51	29.40	-0.020182	NaN	NaN	
4	2022-07-07	92.698962	14335.27	28.26	0.006973	NaN	NaN	

	Base
0	100.0
1	NaN
2	NaN
3	NaN
4	NaN

```
In [61]: #*****Plotting setup*****#
# Generate some data
Date = df["Date"]
Date
y1 =df["PnL Index"]
y1
y2 = df["TAIEX"]
y2
```

```
Out[61]: 0      14343.08
1      14217.06
2      14349.20
3      13985.51
4      14335.27
...
333    16915.71
334    17128.78
335    17171.18
336    17208.95
337    17210.47
Name: TAIEX, Length: 338, dtype: float64
```

```
In [62]: # Get the maximum PnL value
max_pnl = df['PnL Index'].max()
max_pnl_date = df.loc[df['PnL Index']==max_pnl, 'Date'].values[0]
```

```
In [63]: # Create the plot and set the first y-axis (left)
fig, ax1 = plt.subplots()
plt.xticks(rotation=90)
ax1.plot(Date, y1, 'b-')
ax1.scatter(max_pnl_date, max_pnl, color='red', marker='*')
ax1.set_xlabel('Date')
ax1.set_ylabel('PnL Index (Base = 100)', color='b')
ax1.tick_params('y', colors='b')
```


```

# Set the second y-axis (right)
ax2 = ax1.twinx()
ax2.plot(Date, y2, color='deepskyblue', marker=',')
ax2.set_ylabel('TAIEX', color='deepskyblue')
ax2.tick_params('y', colors='deepskyblue')

# Add message box
msg = "Red * : Highest PnL"
props = dict(boxstyle='round', facecolor='white', alpha=0.5)
ax1.text(0.05, 0.95, msg, transform=ax1.transAxes, fontsize=8,
        verticalalignment='top', bbox=props)

# Show the plot
plt.title('PnL vs TAIEX')
plt.show()

```

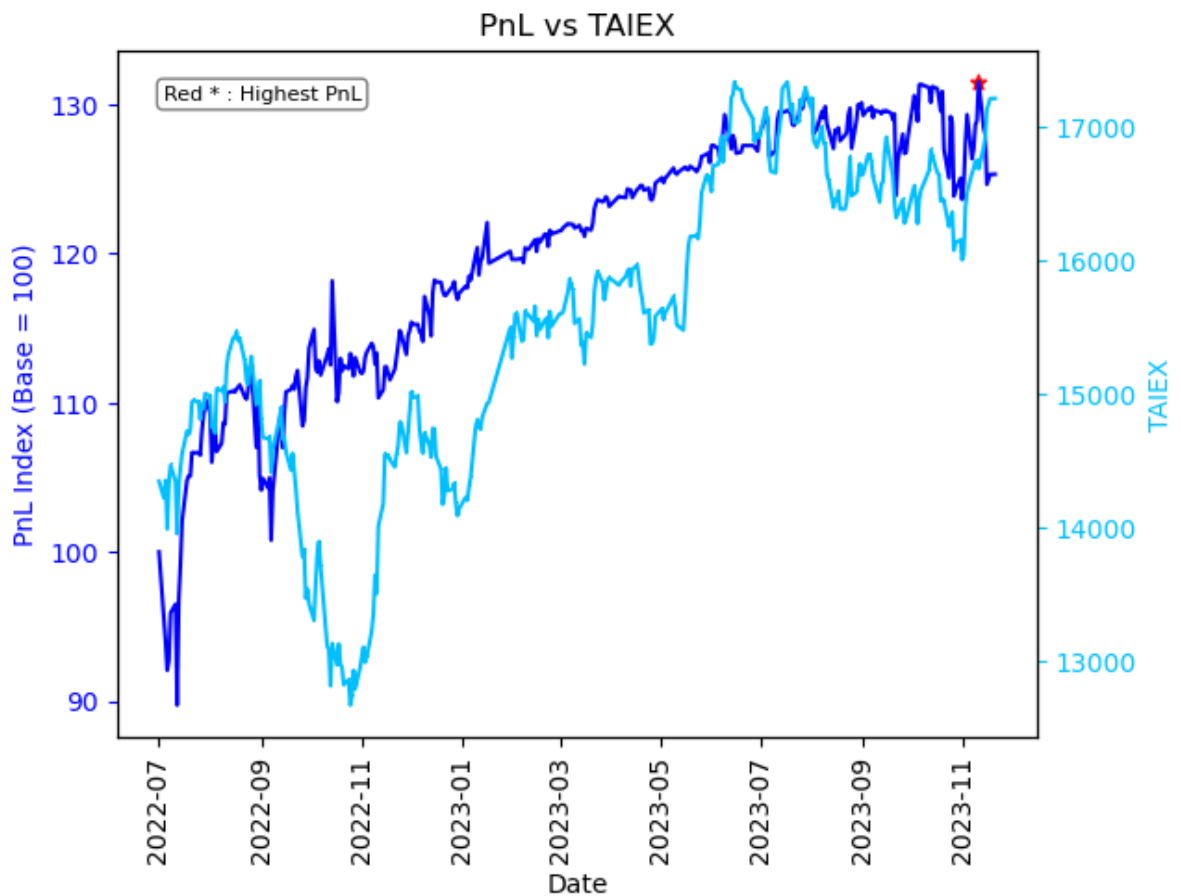

```

In [64]: #PnL vs VIX
y3 = df["VIX"]
y3


# Create the plot and set the first y-axis (left)
fig, ax1 = plt.subplots()
plt.xticks(rotation=90)
ax1.plot(Date, y1, 'b-')
ax1.scatter(max_pnl_date, max_pnl, color='red', marker='*')
ax1.set_xlabel('Date')
ax1.set_ylabel('PnL Index (Base = 100)', color='b')
ax1.tick_params('y', colors='b')

# Set the second y-axis (right)
ax3 = ax1.twinx()
ax3.plot(Date, y3, 'fuchsia', marker='1', linestyle='-.')
ax3.set_ylabel('VIX', color='fuchsia')

```

```
ax3.tick_params('y', colors='fuchsia')
```

```
# Show the plot
plt.title('PnL vs VIX')
plt.show()
```

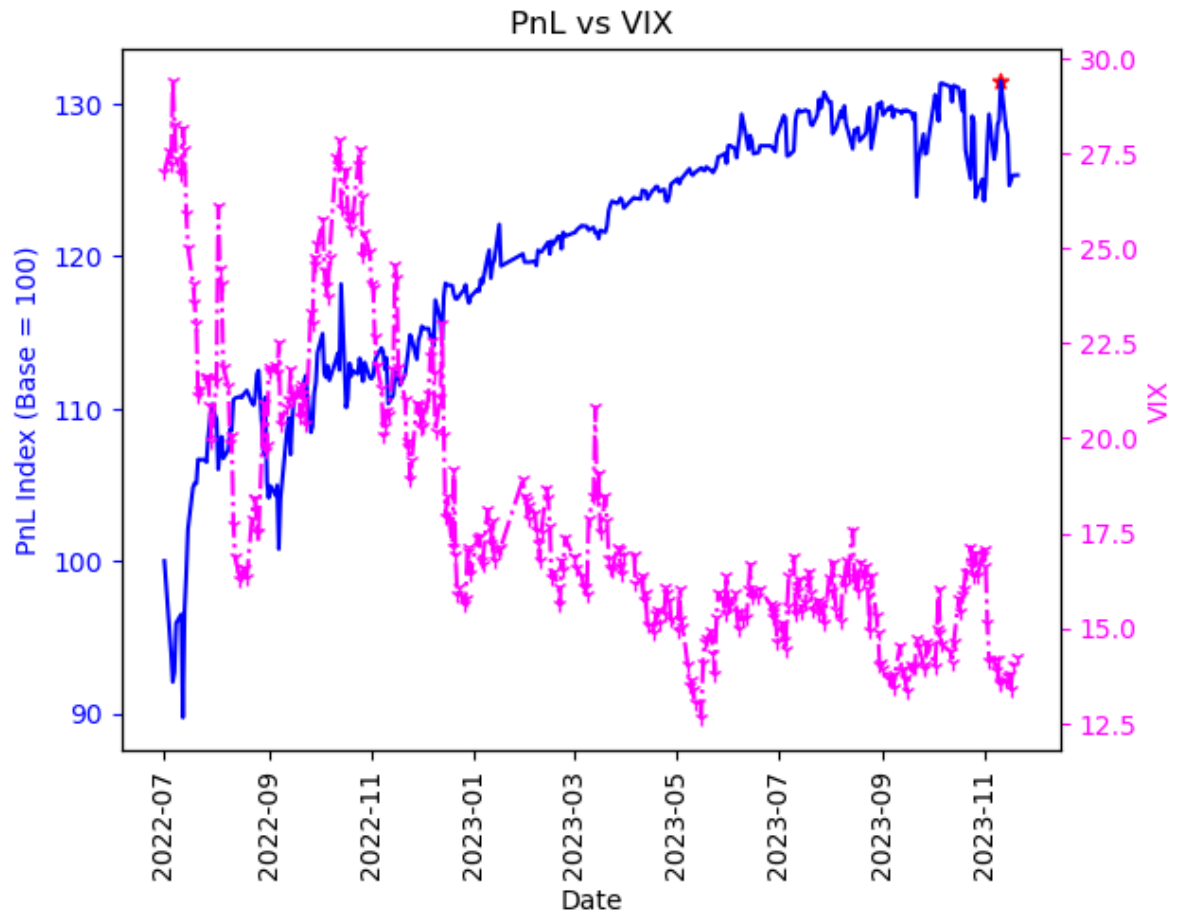


```
In [65]: #Tracking error between PnL and TAIEX
PNL_returns = df['PnL Index'].pct_change()
TAIEX_returns = df['TAIEX'].pct_change()
diff_returns = PNL_returns - TAIEX_returns
tracking_error = diff_returns.std()

roll_te = diff_returns.rolling(20).std()

plt.figure(figsize=(10, 6))
plt.title('Rolling 20-Day Tracking Error btw PnL and TAIEX')
plt.plot(df['Date'], roll_te, color='mediumslateblue')
plt.xlabel('Date')
plt.ylabel('Tracking Error')
plt.show()

#Comment
#Apparently, when market is in turmoil, tracking error will be widen, and vice ver
#Due to the fact that my derivatives position is well hedged against the market shc
```

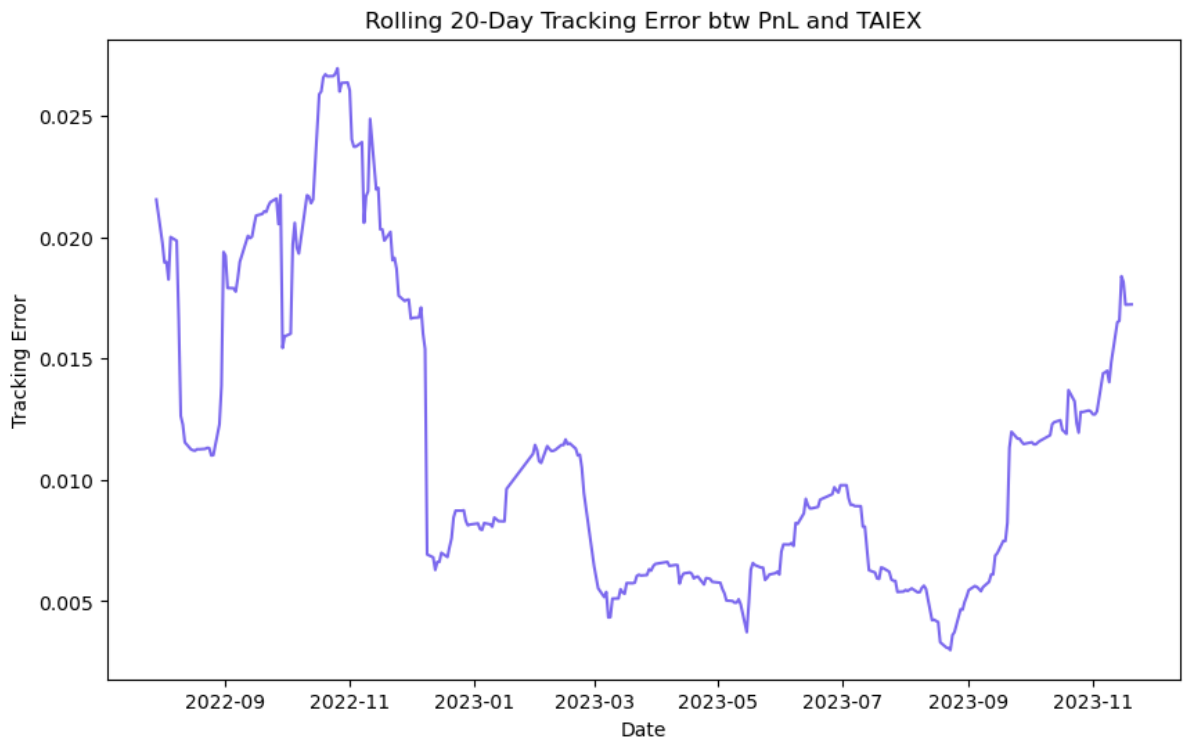

```
In [66]: #Historical volatility
#GARCH model volatility
from arch import arch_model
from scipy.stats import mstats

# Calculate log returns
log_returns = np.log(y2/y2.shift(1))

# Remove NaN values
log_returns = log_returns.dropna()
log_returns = mstats.winsorize(log_returns, limits=0.1)

#Volatility estimation by GARCH (p, q)
from arch import arch_model
import warnings
warnings.filterwarnings("ignore")

# Define the maximum p and q
max_p = 5
max_q = 5

# Initialize variables to store best values of p and q
best_p = 0
best_q = 0
best_bic = np.inf

# Optimal lag selections for p and q of GARCH
for p in range(max_p + 1):
    for q in range(max_q + 1):
        try:
            # Define the GARCH model
            model = arch_model(log_returns, vol="Garch", p=p, q=q)
            # Fit the GARCH model
            model_fit = model.fit(dispatch='off')
            # If the current model's BIC is lower than our best_bic, update the best
            if model_fit.bic < best_bic:
                best_p = p
                best_q = q
                best_bic = model_fit.bic
        except:
```

```

pass
print(f"The best model is GARCH({best_p}, {best_q}) with BIC of {best_bic}")
# Use the suggested best fitted GARCH model parameter (p=1, q=1) by the Bayesian In
# Fit GARCH model
garch = arch_model(log_returns, p=1, q=1, dist='StudentsT')
garch_fit = garch.fit(update_freq=10)

# Extract volatility
sigma = garch_fit.conditional_volatility
annual_vol = sigma.mean()*np.sqrt(250)*100

print(annual_vol)

```

The best model is GARCH(1, 1) with BIC of -2306.915847131885  
Iteration: 10, Func. Count: 119, Neg. LLF: 7120.845853429976  
Optimization terminated successfully (Exit mode 0)  
Current function value: -1080.2216736321188  
Iterations: 19  
Function evaluations: 168  
Gradient evaluations: 15  
25.003734736087758

```

In [67]: #####Performance#####
#Sharpe ratio
# Read in the portfolio returns data from a CSV file
R_first=df["PnL Index"].iloc[0,]
R_first
R_last = df["PnL Index"].iloc[-1] #Always excel's actual row-2
R_last

```

Out[67]: 125.32924997061004

```

In [68]: portfolio_returns=(R_last-R_first)/R_first
portfolio_returns

```

Out[68]: 0.25329249970610035

```

In [69]: daily_returns=df["Returns"]
daily_returns

```

```

Out[69]: 0      0.000000
1     -0.044221
2     -0.016998
3     -0.020182
4      0.006973
...
333   -0.003768
334   -0.026140
335    0.002817
336    0.002536
337    0.000119
Name: Returns, Length: 338, dtype: float64

```

```

In [70]: # Max Drawdown Calculation for PnL Index
cumulative_returns = (1 + df["Returns"]).cumprod()
cumulative_max = cumulative_returns.cummax()
drawdown = (cumulative_returns / cumulative_max) - 1
max_drawdown = drawdown.min()

print("Max Drawdown:", max_drawdown)

```

Max Drawdown: -0.10420949154156467

```
In [71]: # Calculate the Profit Factor
positive_returns = daily_returns[daily_returns > 0].sum()
negative_returns = daily_returns[daily_returns < 0].sum()

# Avoid division by zero
if negative_returns != 0:
    profit_factor = abs(positive_returns / negative_returns)
else:
    profit_factor = float('inf')

print("Profit Factor:", profit_factor)
```

Profit Factor: 1.209714121960967

```
In [72]: # Calculate the excess returns and standard deviation
risk_free_rate = 0.01148 # TAIBOR rate source: https://www.ba.org.tw/Taibor/Detail
excess_returns = portfolio_returns - risk_free_rate
std_dev = np.std(daily_returns)
print("Standard Deviation of Daily Return:", std_dev)
```

Standard Deviation of Daily Return: 0.013664938262035043

```
In [73]: # Calculate the Sharpe ratio
Sharpe_Ratio = excess_returns / std_dev
print("Sharpe Ratio:", Sharpe_Ratio)
```

Sharpe Ratio: 17.695835507572106

```
In [74]: #Annualized Sharpe ratio
risk_free_rate_daily = (1 + risk_free_rate) ** (1/250) - 1
risk_free_rate_daily
average_daily_returns = daily_returns.sum()/250
average_daily_returns
excess_daily_return=average_daily_returns-risk_free_rate_daily
excess_daily_return

Annualized_Sharpe_Ratio=excess_daily_return/std_dev*np.sqrt(250)
print("Annualized Sharpe Ratio:", Annualized_Sharpe_Ratio)
```

Annualized Sharpe Ratio: 1.139310371383859

```
In [75]: #Portfolio Alpha
# Compute the mean returns
mean_PNL = PNL_returns.mean()
mean_TAIEX = TAIEX_returns.mean()

# Compute beta
covariance = PNL_returns.cov(TAIEX_returns)
variance = TAIEX_returns.var()
beta = covariance / variance
beta

# Compute alpha (assuming risk-free rate is 0)
alpha = (mean_PNL - (risk_free_rate_daily + beta * mean_TAIEX))*np.sqrt(250)

# Print alpha
print("Alpha: ", alpha)
```

Alpha: 0.006597441290412161

In [ ]:

In [ ]: