
























ÇOKLU DİL **YAPISI** OLUŞTURMA



















```
o index.php > ...
      <?php require 'lang/_set.php'; ?>
  2
      <!DOCTYPE html>
  3
      <html lang="<?= $lang['code']; ?>">
  5
  6 v <head>
          <meta charset="utf-8">
          <title><?= $lang['title']; ?> | erhanurgun.com.tr</title>
  8
          <link rel="stylesheet" href="style.css">
      </head>
 10
 11
 12 < <body>
          <div class="lang">
 13 ~
 14 ~
              <a href="?lang=tr" class="btn <?= setActive('tr'); ?>">
                  <?= $lang['btn_tr']; ?>
 15
              </a>
 16
              <a href="?lang=en" class="btn <?= setActive('en'); ?>">
 17 ~
 18
                  <?= $lang['btn_en']; ?>
 19
              </a>
          </div>
 20
      </body>
 21
 22
      </html>
 23
                                                      HTML >= v5.0.0
                                                      Code: #HTML003
                              index.php
```







```
∃ style.css > ...
   1
        font-family: "Trebuchet MS", Verdana, sans-serif;
   3
   4
   5
      .lang a.btn {
        background-color: #f8f9fa;
   6
        border: 1px solid □#343a40;
        text-decoration: none;
  8
        border-radius: 3px;
        color: □#343a40;
  10
        padding: 5px;
 11
        margin: 5px;
 12
 13
 14
      .lang a.btn.active {
 15
        background-color: □#343a40;
 16
        color: #f8f9fa;
 17
 18
                                                  CSS >= v3.0.0
                                                  Code: #C55003
                            style.css
```



@erhanurguncomtr







```
lang > 🥗 _set.php > ...
  1 <?php
  2 ob_start();
  3 session_start();
  4 function setActive($langCode)
          if (isset($_SESSION['lang'])) {
  6 ~
              return $langCode === $_SESSION['lang'] ? 'active' : null;
              return $langCode === 'tr' ? 'active' : null;
  9
 10
 11
 12
 13
      $langs = ['tr', 'en'];
 14
 15 v if (isset($_GET['lang'])) {
          $lang = strip_tags(htmlspecialchars($_GET['lang']));
 16
          if (in_array($lang, $langs)) {
 17 ~
              $_SESSION['lang'] = $lang;
 18
              header('Location: ' . $_SERVER['HTTP_REFERER']);
 19
              exit;
 20
 21
 22
 23
 24 vif (empty($_SESSION['lang'])) {
 25
          require_once 'lang/tr.php';
 26 v } else {
          require_once 'lang/' . $_SESSION['lang'] . '.php';
                                                                PHP >= v8.1.2
  28
                                                                Code: #PHP008
                                    _set.php
```








```
lang > 🐡 tr.php > ...
   1 <?php
      // Türkçe dil dosyası
   3 \vee \$lang = [
           'code' => 'tr',
   4
           'btn_tr' => '[TR] - Türkçe',
   5
           'btn_en' => '[EN] - İngilizce',
   6
           'title' => 'Anasayfa'
   8
      ];
                            tr.php
lang > @ en.php > ...
   1 <?php
       // İngilizce dil dosyası
   3 \vee \$lang = [
           'code' => 'en',
   4
   5
            'btn_tr' => '[TR] - Turkish',
   6
           'btn_en' => '[EN] - English',
           'title' => 'Home'
   7
   8
       ];
                                                 PHP >= v8.1.2
                            en.php
                                                 Code: #PHP008
```








TARAYICI GÖRÜNÜMÜ

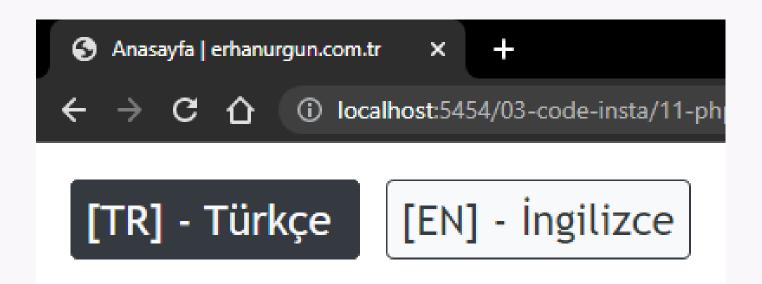

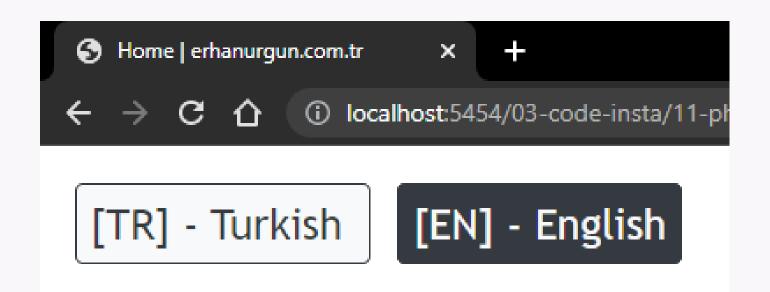



@erhanurguncomtr








































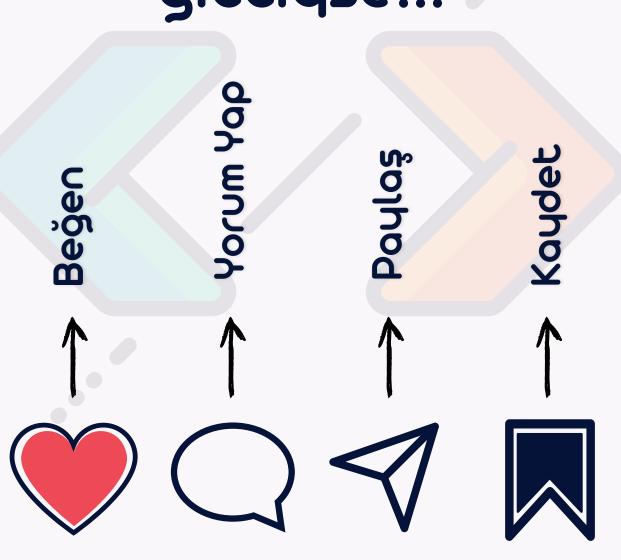



@erhanurguncomtr



