

Code


```
#include <stdint.h>
#define u8 uint8_t

int main() {
    u8 a[8] = {6, 5, 3, 7, 0, 1, 4, 2};
    u8 *p = &a[0];
    u8 *q = &a[2];
    u8 *r = &a[3];
    // <<< Evaluate values at here!
}
```

Memory

Pointers

Note: = 1 byte

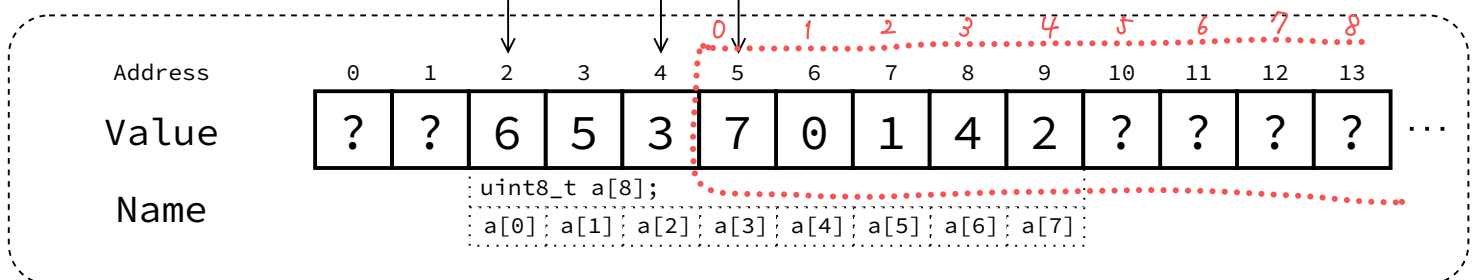

Q. Fill answers in digits (or ? for undefined behavior)

Note: _ is a place holder

So the cell on row "a[_]" and col "0" should be filled with the value of "a[0]"

	0	1	a[0]	a[1]	p	q	r	*p	*q	*r
-	0	1	6	5	2	4	5	6	3	7
1+ _	1	2	7	6	3	5	6	7	4	8
(u8*) _	6	7	2	3	9	8	3	2	4	5
((u8) _)	0	1	6	5	2	4	5	6	3	7
a[_]	6	5	4	1	3	0	1	4	7	2
a[1+ _]	5 ¹	3 ²	2 ⁷	4 ⁶	7 ³	1 ⁵	4 ⁶	2 ⁷	0 ⁴	? ⁸
r[_]	7	0	?	?	1	2	?	?	4	?
r[3+ _]	4 ³	2 ⁴	? ⁹	? ⁸	? ⁵	? ⁷	? ⁸	? ⁹	? ⁶	? ¹⁰
((u8*) _)[0]	0	1	6	5	2	4	5	6	3	7
((u8*) _)[2]	4 ⁸	2 ⁹	3 ⁴	7 ⁵	? ¹¹	? ¹⁰	7 ⁵	3 ⁴	0 ⁶	1 ⁷