

CS 112

Introduction to Data Structures

WEEK 06

Linked Lists

Eric Araújo

Calvin University · Fall 2026

This Week

- 1 What dynamic arrays are bad at
- 2 Nodes and links
- 3 The `Node` and `List` classes
- 4 Traversing
- 5 `prepend` and `append`
- 6 The destructor chain reaction **KEY**
- 7 Linked list vs. dynamic array

Where Arrays Hurt

- `append()` when full, copy everything
- `insert()` in the middle, shift everything after
- `remove()`, shift everything back


One cause. The elements have to sit *next to each other*.

What If We Broke It Up?

- Chunks of 5? 3? 2?
- ...chunks of **one**?

Nothing shifts, ever. But the items are no longer neighbors, so **each one has to point to the next.**

A Linked List

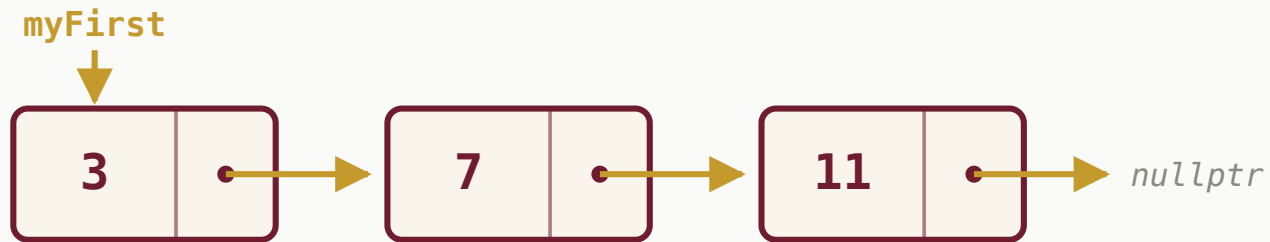

Each **Node** holds one item and the address of the next Node. The last one points to `nullptr`, which is how you know you've reached the end.

Two Classes

Node: one link

```
class Node {  
    public:  
        Node();  
        Node(Item it, Node *nxt);  
        ~Node();  
        Item myItem;  
        Node *myNext;  
};
```

List: the container

```
class List {  
    public:  
        List();  
        ~List();  
        void prepend(Item it);  
        void append(Item it);  
    private:  
        unsigned mySize;  
        Node *myFirst;  
        Node *myLast;  
};
```

Whoever uses your `List` never sees a `Node`. That is what `private` is for.


Traversing

```
Node *current = myFirst;

while (current != nullptr) {
    cout << current->myItem << endl;
    current = current->myNext;    // hop to the next
}
```

This loop is the linked-list equivalent of `for (i = 0; i < n; ++i)`. You will write it dozens of times, and every one of its bugs comes from forgetting the `nullptr` test or forgetting to advance.

prepend(5)

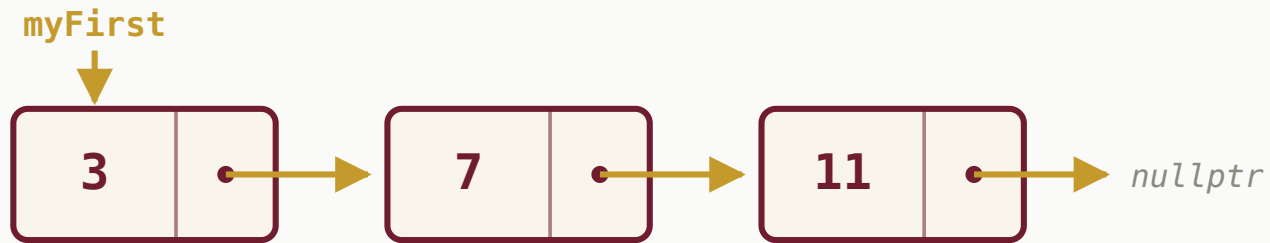

Adding at the front. What has to change?

prepend(5)



```
void List::prepend(Item it) {  
    myFirst = new Node(it, myFirst);    // point the new one at the old first  
    if (mySize == 0) { myLast = myFirst; }  
    ++mySize;  
}
```

Three steps, no shifting, no matter how long the list is, **constant time**.

TALK TO YOUR NEIGHBOR · TTYN

Why does `prepend()` need that `if (mySize == 0)` ?

- A. To avoid a memory leak
- B. Because on an empty list the new node is also the *last* node
- C. To keep `mySize` correct
- D. It isn't needed, `myLast` is never used

append(), Why Keep myLast?

```
void List::append(Item it) {  
    Node *n = new Node(it, nullptr);  
    if (mySize == 0) {  
        myFirst = myLast = n;  
    } else {  
        myLast->myNext = n;    // old last points at n  
        myLast = n;  
    }  
    ++mySize;  
}
```

Without `myLast` you'd walk the whole list to find the end, linear. Storing one extra pointer makes `append()` constant. **A little memory buys a lot of speed.**

The Destructor Chain Reaction

```
Node::~~Node() {  
    delete myNext;    // destroy the rest of the list  
}  
  
List::~~List() {  
    delete myFirst;    // starts the chain  
}
```

Deleting the first Node deletes the second, which deletes the third.

`delete nullptr` is harmless, and that is what stops the chain.

TALK TO YOUR NEIGHBOR · TTYN

A **List** holding 4 items goes out of scope.
How many **Node** destructors run?

- A. 1, only the first node is deleted
- B. 4, each node deletes the next
- C. 0, the compiler handles it
- D. 5, including the nullptr at the end

Linked List vs. Dynamic Array

Operation	Dynamic array	Linked list
index <code>v[i]</code>	constant	linear
append	amortized constant	constant
prepend	linear	constant
insert in middle	linear	linear to find, constant to link
remove	linear	linear to find, constant to unlink
traverse all	linear	linear
memory per item	just the item	item + a pointer

Neither wins. The array is built for *reaching*, the list for *rearranging*.

TALK TO YOUR NEIGHBOR · TTYN

You need a collection you'll mostly add to at the front and read in order. Which?

- A.** Dynamic array, indexing is faster
- B.** Linked list, prepending is constant and you never index
- C.** Either, they're the same in practice
- D.** Dynamic array, because it uses less memory per item

Week 06 Recap

- A linked list trades **contiguity** for **flexibility**
- Each **Node** holds an item and the address of the next
- Traversal is **while (current != nullptr)**: advance or loop forever
- **prepend** and **append** are constant; indexing is linear
- The empty list and the one-item list are where the bugs hide
- Node destructors chain, and **delete nullptr** ends the chain safely

Next: a07 →

This deck stands on earlier CS112 materials by
Joel Adams and **Victor Norman** · adapted and extended by **Eric Araújo**

