	equal count	distinct senders	distinct components
a_1 a_2 a_3	✓	✓	×
a_1 b_1 c_1	✓	×	✓
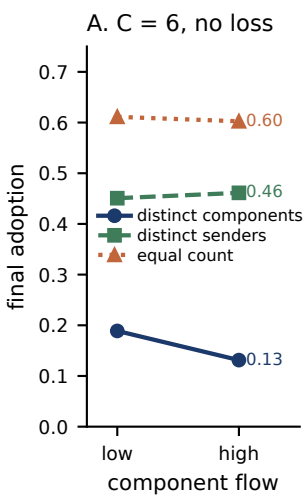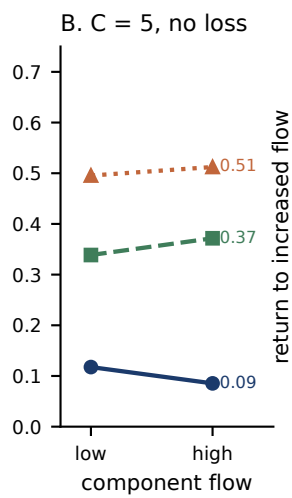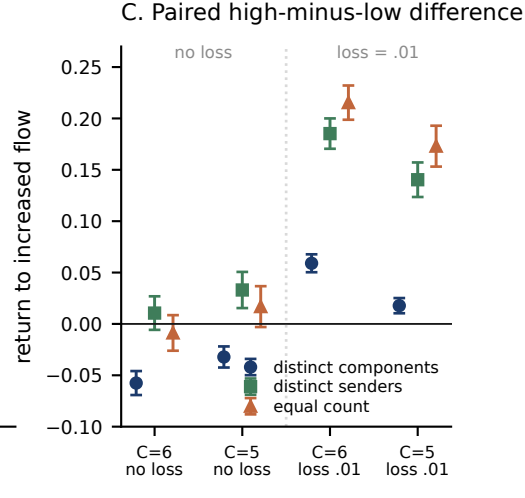
Letter = component; subscript = sender. Within each paired run, retained tokens are identical. Only the readiness rule changes.