	equal count	distinct senders	distinct elements
a_1 a_2 a_3	✓	✓	×
a_1 b_1 c_1	✓	×	✓

Letter = element; subscript = sender. Within each paired run, retained tokens are identical. Only the readiness rule changes.
Distinct senders is a control for source nonredundancy, not a representation of complex contagion.

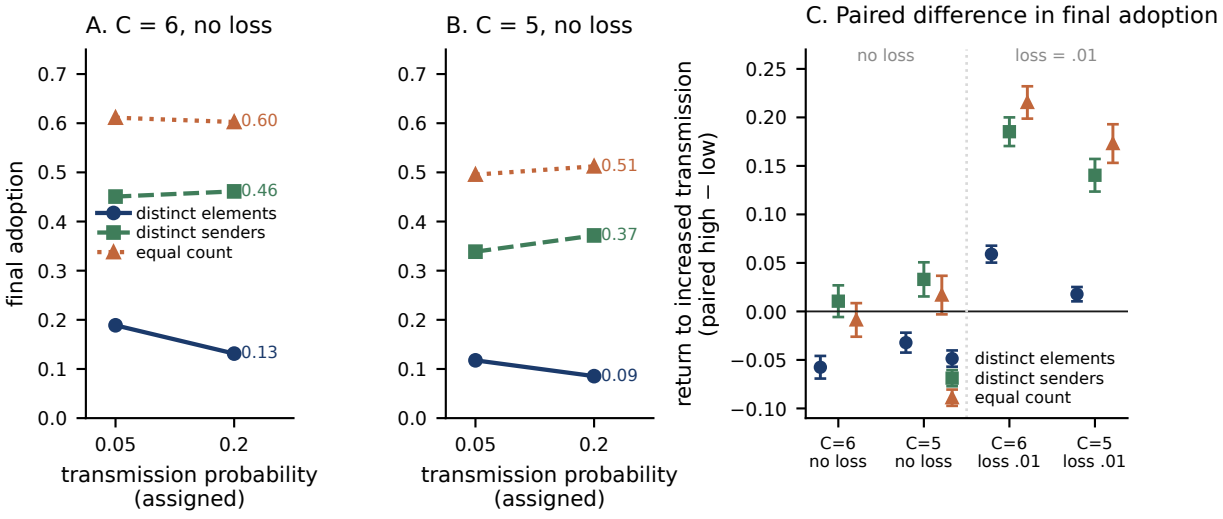

Distinct elements returns least in all four conditions.