


Free Tcp/Ip Utility Program Documentation


I offer this program for free to anyone who wants to try it out. I have been teaching myself Python 3 since losing my job about a year ago, and this utility is my attempt to put my knowledge to a practical use. If you find it useful and want to donate a buck or two to the unemployed programmer who wrote it you can use the following link to do so: [Donate](#)

Screenshot: Main Window

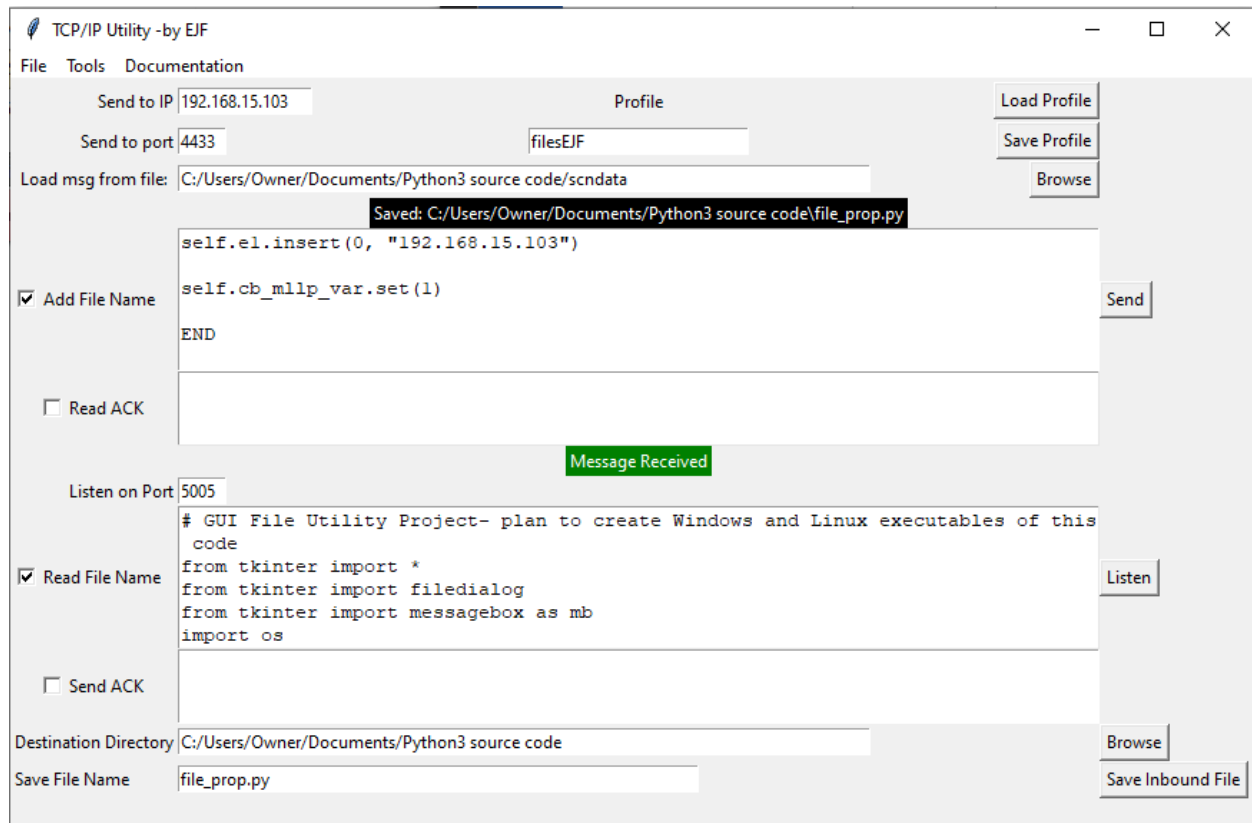

Overview


This program designed to let you load in a HL7 message or textual file and send it out to a listening socket, or open a listening socket on a port and receive a message, then save off that message to a file if desired. The text windows that the messages are loaded into are editable and you can make changes to the message before sending or saving it. The program can send or receive an ACK if desired, and will automatically wrap the message with mllp if it detects that it's missing from the loaded file. And I used it to quickly send source code between my Windows and Linux machines so there are options to send and receive a file name, this was designed to send the file name of the loaded file name into the "Save File Name" field on the receiving system. If acting as the listening server the program will ask you if you want to keep listening after a message is received, you will need to stop listening to perform other functions on window as the window is frozen while listening.

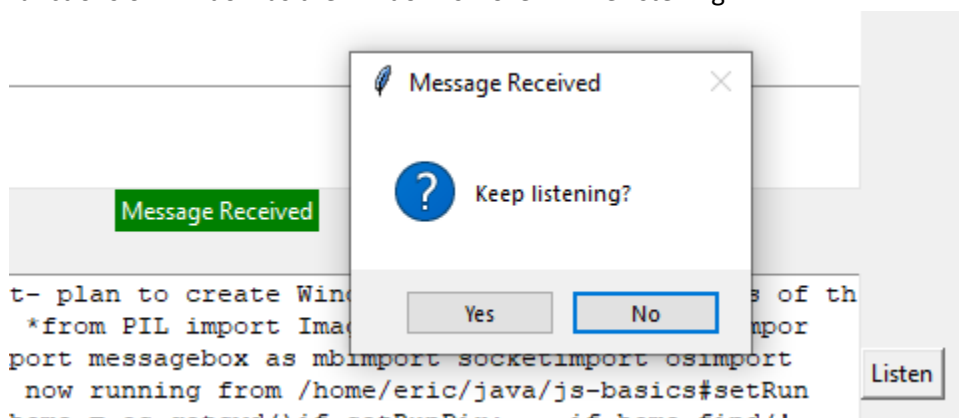

The program lets you save off the current screen values to a “profile” to quickly load in IP and port values. Please note that if you load a profile it may load in a “Load msg from file:” value and the data for the previously selected file onto the screen, however the no file name will be passed with the message unless the file was actually loaded into the window after the profile was loaded, the file loaded in with the profile will still be sent, but no filename will be passed with it.


Errors and Warnings

Any Errors encounter will appear with a red background for example if the listener isn’t running when we try to send we get:

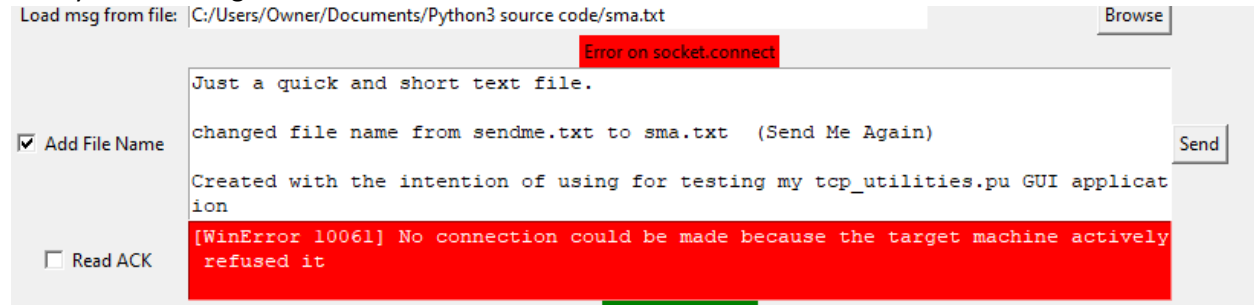


(From the Windows 10 os)

Warning messages will appear with an orange background i.e. If we tell the program to send an ACK but don’t get an HL7 message:

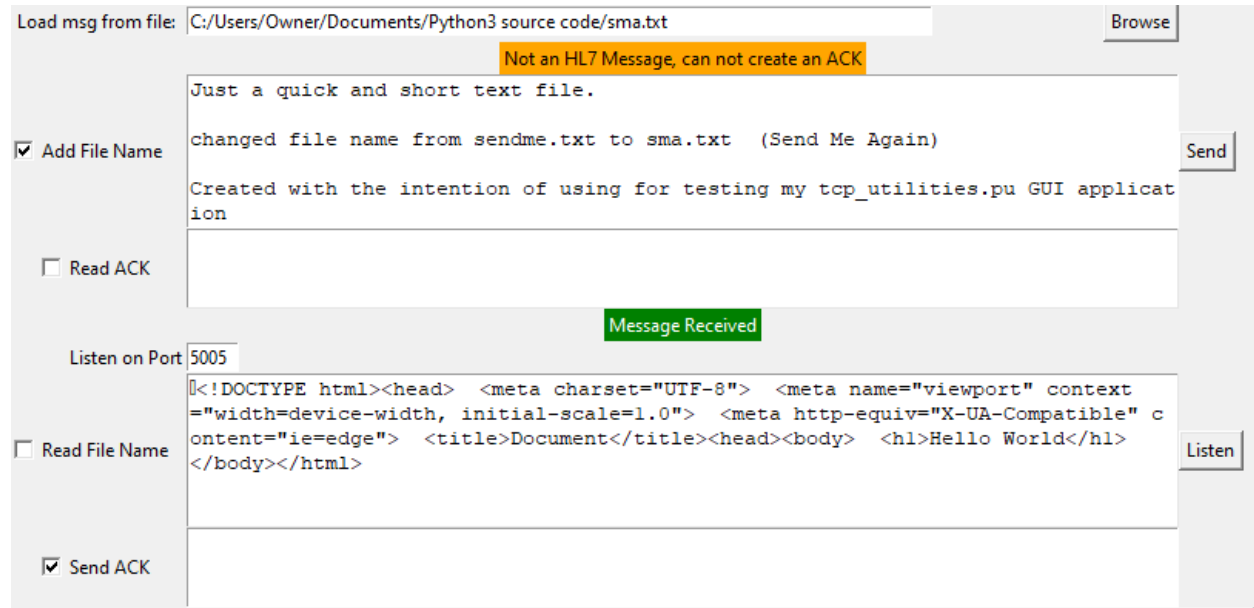

If “Read ACK” is selected but no ACK is detected from the listener after 20 seconds an Abort message will pop up to allow the user to elect to stop the program from waiting for an ACK message:

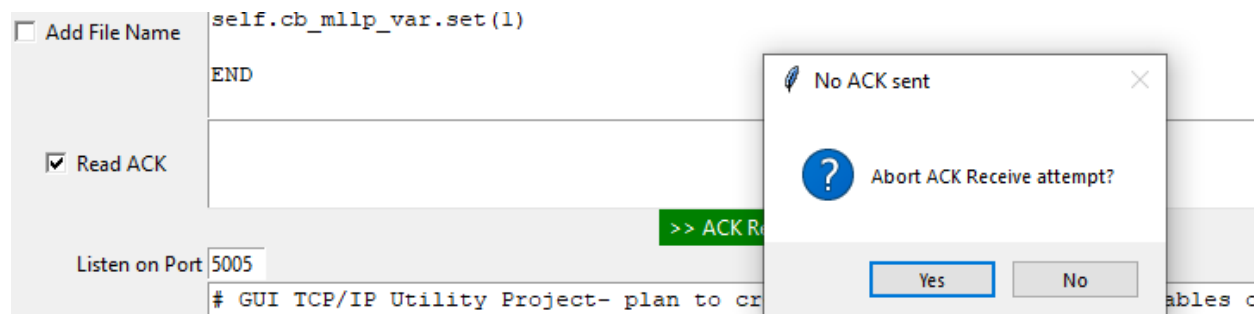

If installed via the .deb file for Debian Linux the data directory fpd (used to store profile data and this documentation file) will be created off the /home/*user*/Documents directory (where the *user* value is the Linux user name).

If you want to report a bug or have an enhancement request or want to provide me with some feedback you can contact me at: Eric_Frobese@hotmail.com