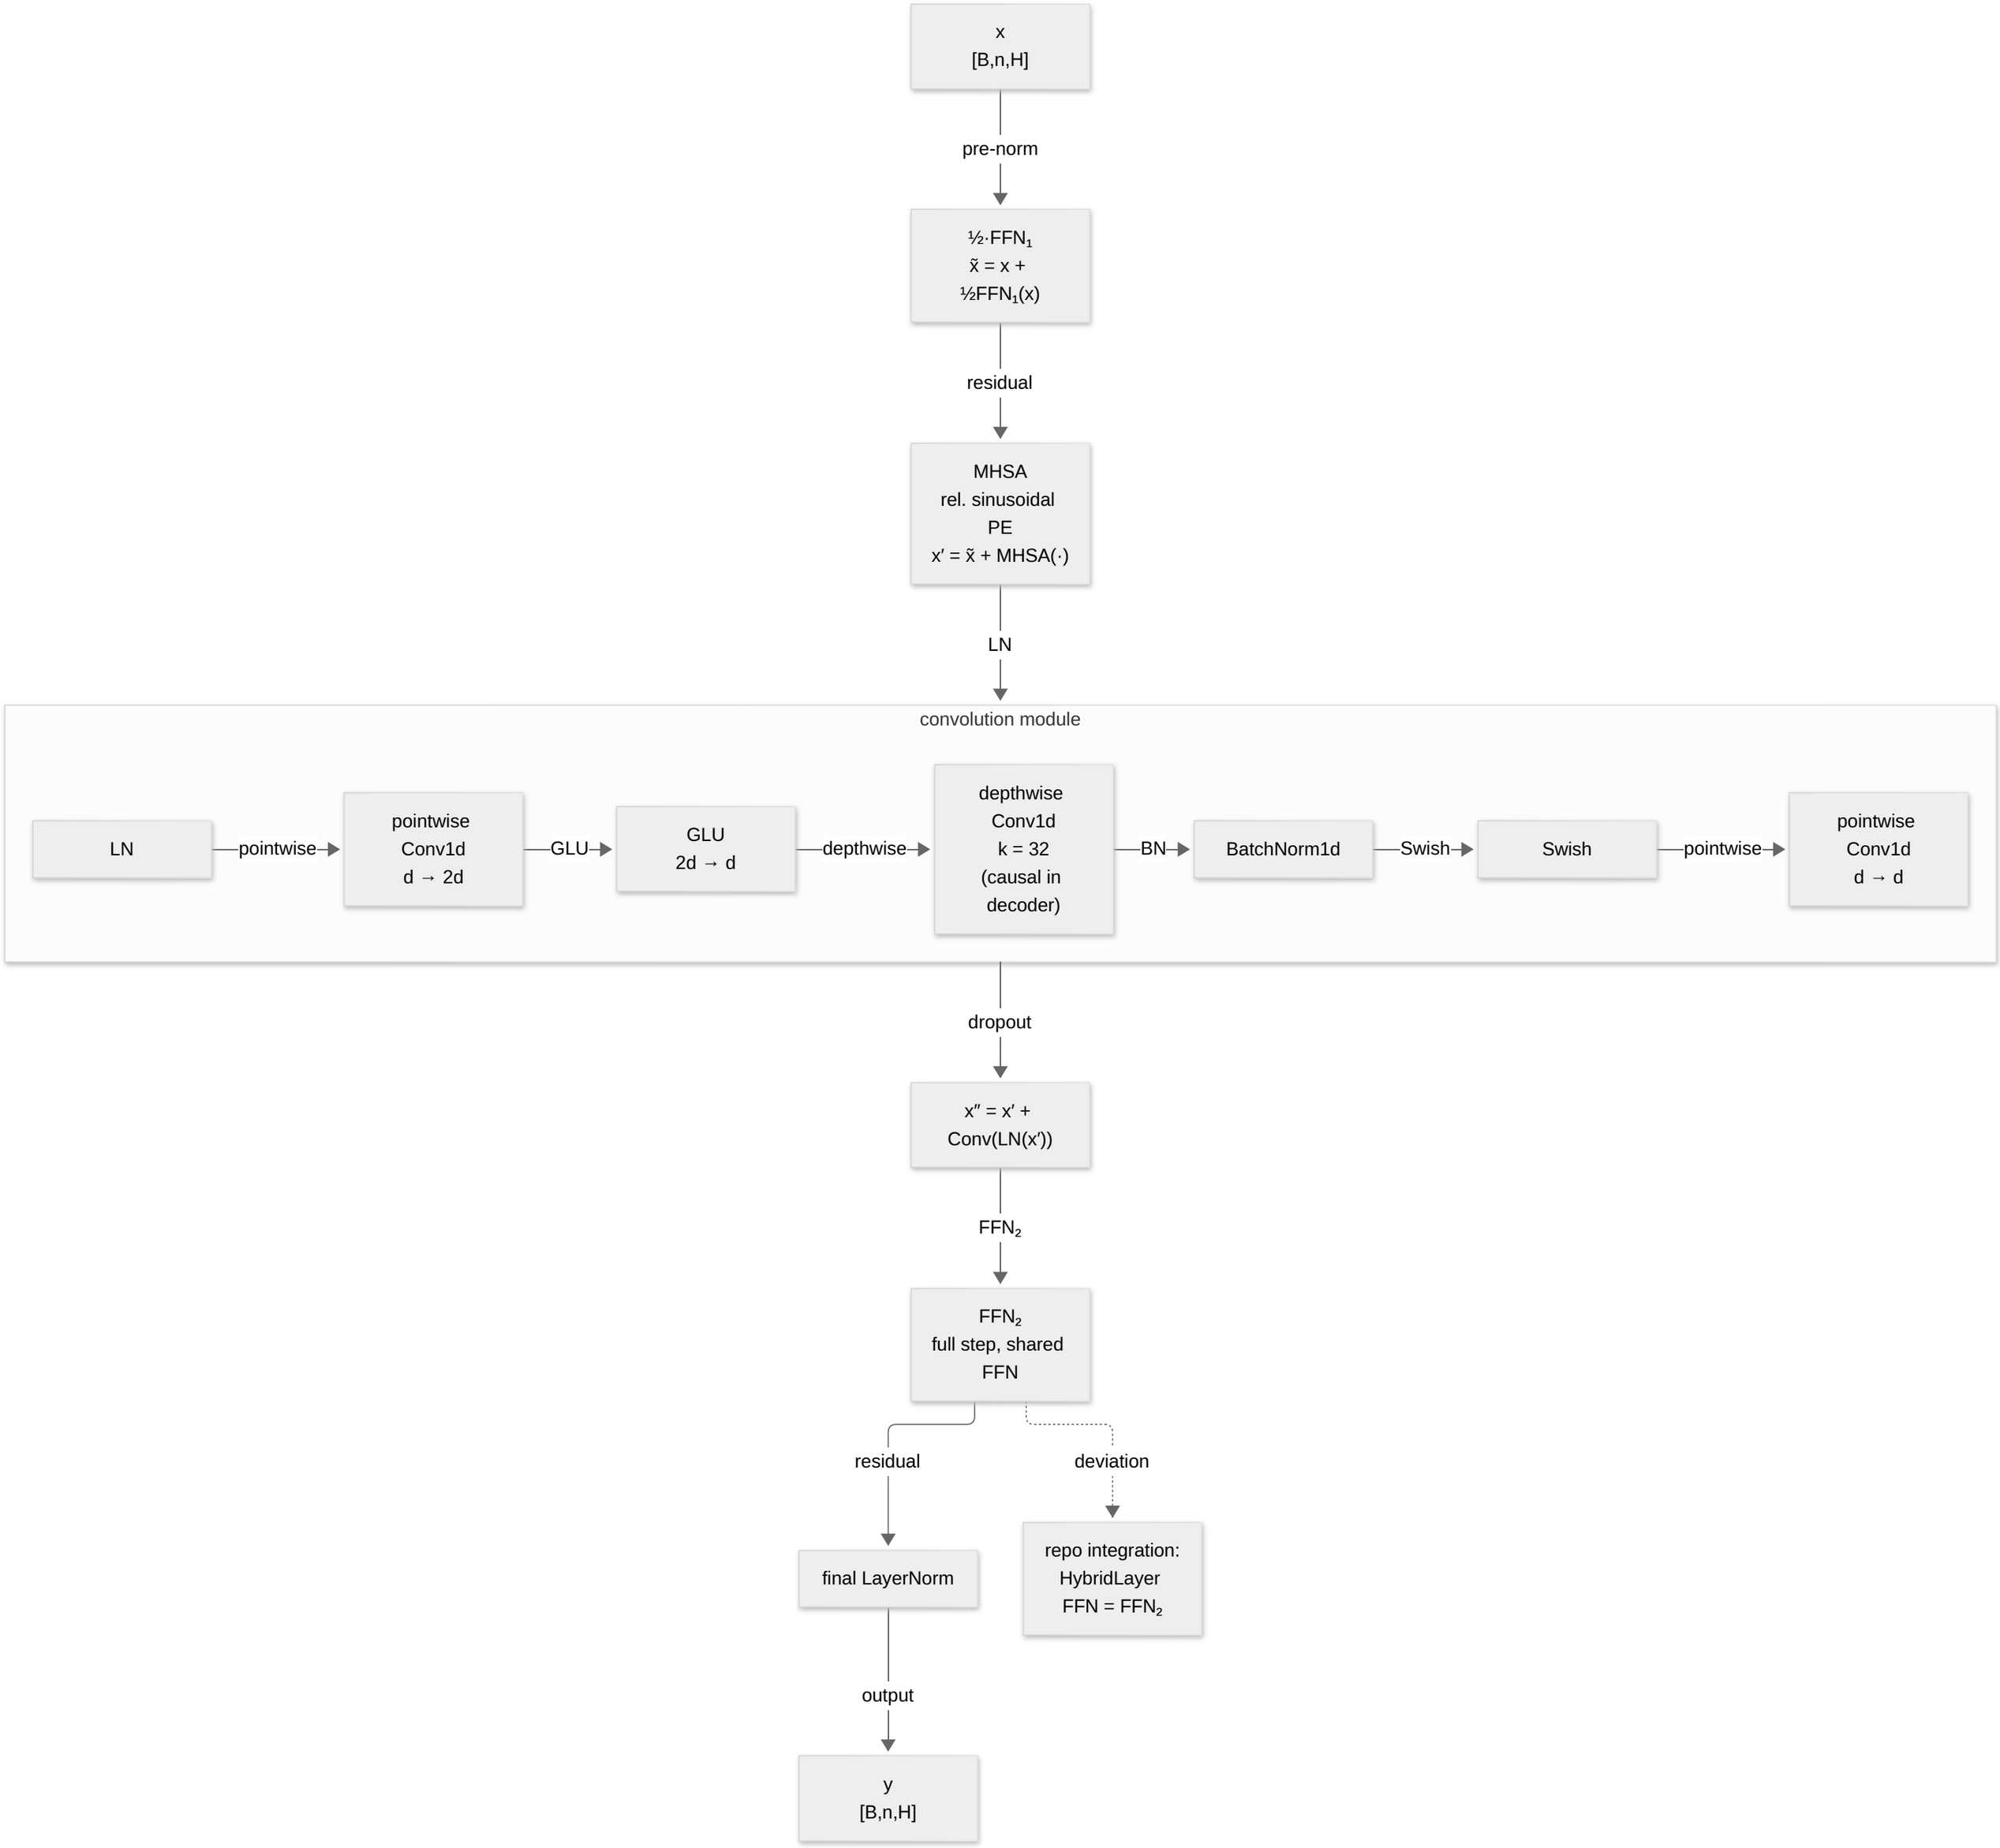

x
[B,n,H]
pre-norm
½·FFN1
x̃ = x +
½FFN1(x)
residual
MHSA
rel. sinusoidal
PE
x′ = x̃ + MHSA(·)
LN
convolution module
LN
pointwise
pointwise
Conv1d
d → 2d
GLU
GLU
2d → d
depthwise
depthwise
Conv1d
k = 32
(causal in
decoder)
BN
BatchNorm1d
Swish
Swish
pointwise
pointwise
Conv1d
d → d
dropout
x″ = x′ +
Conv(LN(x′))
FFN2
FFN2
full step, shared
FFN
residual
deviation
final LayerNorm
repo integration:
HybridLayer
FFN = FFN2
output
y
[B,n,H]