

EPM Policies XML format



For internal use only. Please do not forward to customers.

This page, previously maintained as a Word document in the EPM source control, is now maintained in the Confluence only. The version from the source control last updated on Apr 2020 is [attached](#) to this page.

- [General](#)
- [Legend](#)
- [<Policies> element](#)
- [<Policy> element](#)
- [<DeletedPolicy> element](#)
- [<ApplicationGroups> element](#)
- [<ApplicationGroup> element](#)
- [<Targets> element](#)
- [<Tokens> element](#)
- [<Token> element](#)
- [<Groups> element](#)
- [<Group> element](#)
- [<Privilege> element](#)
- [<TokenOwner> element](#)
- [<RestrictionRules> element](#)
- [<RestrictionRule> element](#)
- [<RstrPaths> element](#)
- [<RstrPath> element](#)
- [<RstrKeys> element](#)
- [<RstrKey> element](#)
- [<NetShares> element](#)
- [<NetShare> element](#)
- [<RstrMemory> element](#)
- [<RstrNetworks> element](#)
- [<RstrIPv4> element](#)
- [<RstrIPv6> element](#)
- [<RstrIPv4Range> element](#)
- [<RstrIPv6Range> element](#)
- [<RstrHostname> element](#)
- [<GUI> element](#)
- [<Dialog> element](#)
- [<Balloon> element](#)
- [<Title> and <Text> elements](#)
- [<CommonCode> element](#)
- [<Alert> element](#)
- [<UserGroupList> element](#)
- [<TargetLocalGroups> element](#)
- [<User> element](#)
- [<IdpUser> element](#)
- [<IdpGroup> element](#)
- [<AzUser> element](#)
- [<AzGroup> element](#)
- [<Scheduler> element](#)
- [<Condition> element](#)
- [<IncludeADComputerGroup> and <ExcludeADComputerGroup> elements](#)
- [<ADGroup> element](#)
- [<IncludeComputerGroup> and <ExcludeComputerGroup> elements](#)
- [<AzComputer> element](#)
- [<ActionTrigger> element](#)
- [<Executable> element](#)
- [<MacExecutable> element](#)
- [<Script> element](#)
- [<MSI> element](#)
- [<MSU> element](#)
- [<COM> element](#)
- [<AdminTask> element](#)
- [<MacAdminTask> element](#)
- [<URL> element](#)
- [<ActiveXInstall> element](#)
- [<FSEntry> element](#)
- [<RegKey> element](#)
- [<UsbDev> element](#)
- [<OpticalDisc> element](#)
- [<Exclude> element](#)
- [<Dll> element](#)
- [<DeletedTarget> element](#)
- [<FileName> element](#)
- [<Arguments> element](#)

- <Location> element
- <Owner> element
- <BundleID> element
- <Publisher> element
- <RequestedAccess> element
- <MimeType> element
- <AppPackageName> element
- <Capability> element
- <DeviceCapability> element
- <FileVerInfo> element
- <FileMsiInfo> element
- <SvcName> element
- <MediaInfo> element
- <FileOrigin> element
- <DistributionService> element
- <Package> element
- <Process> element
- <EmbeddedScript> element
- <Parent> element
- <ParentIsNot> element
- <Configuration> element
- <Messages> element
- EvfPolicyAction values
- GUI variables
- Policy internalType attribute values
- Alert triggers and dialog types
- EvfAdminTaskId
- LCD Policy
- IDP Policy
- <LinuxExclude> element
- <FileName> element
- <LinkName> element
- <Arguments> element
- <Location> element
- <Interpreter> element
- <RunAsUser> element
- <AllowedInterpreters> element
- XML Example

General

Policies are delivered from Manager to Agents in form of XML document. The XML document contains only policies added, changed or deleted since the last update.

Legend

Value types:

Number	Decimal representation of 32-bit non-negative integer in range 0-4294967295
Boolean	Recognized by the agent as follows: "False" (case insensitive) and "0" strings mean <i>False</i> . "True" (case insensitive) and decimal number except 0 ("1", "2" etc.) mean <i>True</i> . Any other string is invalid for the <i>Boolean</i> type.
GUID	String in the registry GUID format. E.g. "{A57A2963-E6CF-4D87-94CC-CAA6FDA0165F}"
Optional	If attribute or element is marked <i>Optional</i> it should be present only if its value differs from the default value (to reduce the size of the document, improve readability and save traffic).

<Policies> element

Root element name is **Policies**.

Attributes

version	Number	Defines the XML format version of the entire XML document
----------------	--------	---

changeId	64-bit number <i>Optional. Not valid in GPO mode.</i>	This number should be kept by VFAgent and sent to VFMng with the next policy request. That allows VFMng to reply with updated policies only.
merge	Boolean. <i>Optional. Not valid in GPO mode.</i>	If the merge attribute value is False and all existing policies are deleted and replaced with new policies. If the merge attribute value is True then new policies are merged with existing policies and only if old policy has the same ID as a new policy the old policy is replaced. So when sending only the policies changed/deleted since the last update merge attribute should be True. Default value: False.

Child elements

<Policy> - defines new policy or policy changed since the last update. There can be zero or more Policy elements in the document.
<DeletedPolicy> - defines policy deleted after last update. There can be zero or more DeletedPolicy elements in the document.
<ApplicationGroups> - parent element for collection of [ApplicationGroup](#) elements. There can be zero or one ApplicationGroups element in the document.
<Tokens> -parent element for collection of [Token](#) elements. There can be zero or one Tokens element in the document.
<GUI> - parent element for collection of [Dialog](#) and [Balloon](#) elements. There can be zero or one GUI element in the document.
<RestrictionRules> - parent element for collection of [RestrictionRule](#) elements.

So the top-level document structure looks as follows:

```
<Policies version="4" changeId="123456789123">
  <Policy>...</Policy>
  <Policy>...</Policy>
  <DeletedPolicy>...</DeletedPolicy>
  <DeletedPolicy>...</DeletedPolicy>
  <ApplicationGroups>
    <ApplicationGroup/>
    <ApplicationGroup/>
  </ApplicationGroups>
  <Tokens>
    <Token/>
    <Token/>
  </Tokens>
  <GUI>
    <Dialog/>
    <Balloon/>
  </GUI>
  <RestrictionRules>
    <RestrictionRule/>
  </RestrictionRules>
</Policies>
```

<Policy> element

Policy element defines a new policy or policy changed since the last update.

Path: [/Policies/Policy](#)

Attributes (applicable to all policy actions)

id	Number	Valid in Server-based version only. Defines the unique policy id.
gpId	GUID	Valid in Group Policy version only. Defines the unique policy id.
order	Number	The attribute sets policy precedence. Policies with lower order value will have higher precedence .

action	Number	One of the EvtPolicyAction values defined in VfAgentDeclarations.cs file.
name	String	Defines policy display name. Its value is used for visualization only. For identification use the id attribute value.
reportUsage	Number. Optional.	One of the EvtReportPolicyUsageState values defined in VfAgentDeclarations.cs file. Defines whether to report policy usage to the manager. Possible values: 0 default. Use per-set configuration to decide if this policy usage should be reported. 1 Always report this policy usage 2 Never report this policy usage Note: Not applicable to EXCLUDE policy.
writeEventLog	Boolean. Optional.	Defines whether Policy Usage should be recorded in Windows Event Log. Default value: False. Not applicable to EXCLUDE policy.
useUtcTime	Boolean. Optional.	Defines whether <i>startTime</i> and <i>endTime</i> attributes should be treated as UTC time rather than local time. Default value: False. Added in EPM version 10.11.
startTime	String. Optional.	Defines time when the policy should be activated. <i>startTime</i> and <i>endTime</i> attributes correspond to the "Policy activation options" page in policy wizard. The string must be in the following format: "YYYY.MM.DD HH:MM". The HH value is always in 24h format. If <i>useUtcTime</i> attribute exists and set to True the value should be treated as UTC time. Otherwise, it should be treated as the agent local time.
endTime	String. Optional.	Defines when the policy should be deactivated. <i>startTime</i> and <i>endTime</i> attributes correspond to the "Policy activation options" page in policy wizard. The string must be in the following format: "YYYY.MM.DD HH:MM". The HH value is always in 24h format. If <i>useUtcTime</i> attribute exists and set to True the value should be treated as UTC time. Otherwise, it should be treated as the agent local time. Default value: if the attribute is missing the policy is never deactivated automatically.
internalType	Number. Optional.	Defines policy type to display it in GUI. Also used to distinguish between Default Policies and other policy types. For possible values see internalType attribute values .
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33", "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy as usual. Default value: "0". Meaning if the attribute is missing, then the agent processes the policy as usual. The attribute added in EPM version 11.7.

Attributes applicable if action=1 (NormalRun), or action=2 (Block), or action=3 (Elevate), or action=4 (ElevateOnDemand), or 6 (Collect Policy Automation)

implicit	Boolean. Optional.	Starting from version 4.3 all policies are separated into <i>explicit</i> and <i>implicit</i> policies. Explicit policies are policies with well-defined targets and action (e.g. "Elevate Defrag.exe"). Implicit policies are applied to large groups of targets without exact definitions, so called "gray lists" (e.g. "Allow all files installed before Viewfinity Agent"). In version 4.3 only 2 policies are implicit: Default policy for old applications and Default policy for new applications. Important: implicit policies never override explicit policies even if implicit policy has higher priority than explicit policy. Default value: False.
-----------------	--------------------	--

Attributes applicable if action=1 (NormalRun), or action=2 (Block), or action=3 (Elevate), or action=4 (ElevateOnDemand)

sendPolicyAutomation	Boolean. Optional.	Send Policy Automation event each time the policy is triggered. Default value: False.
reportNewFiles	Boolean. Optional.	Send Policy Audit event each time a new file satisfying policy conditions is created. Default value: False.

Attributes applicable if action=1 (NormalRun), or action=4 (ElevateOnDemand), or action=3 (Elevate)

screenRecording	Boolean. Optional.	Enables screen recording Default value: False.
------------------------	--------------------	--

Attributes applicable if action=4 (ElevateOnDemand)

replaceUAC	Boolean	Replace UAC dialog for policy targets for non-admin users. Depending on <Alert> element the UAC dialog will be replaced by EPM custom prompt or the target will be elevated without any prompt. If replaceAdminUAC (see below) is not present (older versions) then replaceUAC is used for both admin and standard users.
replaceAdminUAC	Boolean	Replace UAC dialog for policy targets for administrators. Depending on <Alert> element the UAC dialog will be replaced by Viewfinity custom prompt or the target will be elevated without any prompt. If replaceAdminUAC is not present like (older versions) then replaceUAC is used for both admin and standard users.
shellExtension	Boolean	Add "Run with Elevated Privileges" Windows Explorer context menu item to the policy targets.
reportProcessLaunches	Boolean. Optional.	Report regular process launches (together with real requests for Admin privileges). Default value: False

Attributes applicable if action=2 (Block)

killRunningApps	Boolean. Optional.	If False, running apps blocked by the policy are left to run. Otherwise they are killed according to VF_TRIGGER_KILL_APPS UI setting: either the dialog is shown or the apps are terminated without warning. Default value: True.
------------------------	--------------------	---

Attributes applicable if action=6 (Collect Policy Automation)

collectUserRequest	Boolean	Allow user to manually request privilege elevation.
collectUserActionsOnly	Boolean	Collect only events triggered by end-user actions. Skip events triggered by system, scheduled tasks etc.
useHeuristics	Boolean	Treat certain behavioral patterns as Policy Automation events.
suppressUAC	Boolean	Suppress UAC dialog for standard users. Depending on <Alert> element the UAC dialog will be replaced by Justification prompt or Policy Automation event will be generated without any prompt.
suppressAdminUAC	Boolean	Suppress UAC dialog for admin users. Depending on <Alert> element the UAC dialog will be replaced by Justification prompt or Policy Automation event will be generated without any prompt.
sourceUser	Number	Possible values: 0 Collect events from standard users only, 1 Collect events from administrative users only, 2 Collect events from all users.
reportProcessLaunches	Boolean. Optional.	report regular process launches (together with real requests for Admin privileges). Default value: False

Attributes applicable if action=8 (ComputerAction)

compAction	Number	One of the EvfComputerAction values defined in VfAgentDeclarations.cs file (shutdown, restart etc).
-------------------	--------	--

Attributes applicable if action=11 (Set Security)

allowAccess	Boolean	When allowAccess is True access to the specified file/directory/regkey/USB is allowed. Otherwise access is denied.
--------------------	---------	---

Attributes applicable if action=12 (Exclude)

--	--	--

excludeType	String. Optional.	Defines what excludes should be applied to. Possible values: "all" default. "newFiles" exclude from notifications for new files
--------------------	-------------------	---

Attributes applicable if action=15 (EaglesPolicy)

threatID	Number	Defines id of internal Eagles Rule.
epAction	Number	unsigned int from <i>EvtEPPolicyAction</i> . Defines action for the appropriate Eagles rule

Attributes applicable if action=16 (EaglesPolicyGlobal)

rulesVesion	String	Defines version of Eagles Rules file.
--------------------	--------	---------------------------------------

Attributes applicable if action=17 (LCD policy)

For the applicable attributes and child elements see [LCD policy](#) section.

Attributes applicable if action=20 (AddToLocalGroup)

killRunni ngApps	Boolean. Optional.	if False, apps started during the activity period will remain running. Otherwise they are killed according to VF_TRIGGER_KILL_APPS UI setting: either the dialog is shown or the apps are terminated without warning. Default value: True.
-----------------------------	-----------------------	--

Attributes applicable if action=22 (LSASS Credential Lure Used)

	String	Defines...
--	--------	------------

Child elements

<UserGroupList> *Optional. Depends on policy action.* Parent element for a collection of **User** elements. Define target groups/users the policy should be applied to. If policy is applicable to whole computer only (Restart/RunScript/etc.) the element is not present. This element is also not applicable to Exclude and SoftwareDistributors policies.

Default value: if the element is missing the policy is applicable to all users.

<ExcludeUserGroupList> *Optional. Depends on policy action.* Parent element for a collection of **User** elements. Define target groups/users the policy should not be applied to. This element is also not applicable to Exclude and SoftwareDistributors policies. Contents identical to <UserGroupList>
Default value: if the element is missing the policy is applicable to all users.

<TargetLocalGroups> *Applicable to the policy action 20 (AddToLocalGroup) only.* Parent element for a collection of **User** elements. Define target groups
For the AddToLocalGroup policy.

Default value: if the element is missing the policy is applicable to all users.

<Scheduler> *Optional.* Defines weekdays and hours when the policy is active.

Default value: if the element is missing the policy is applicable 24 hours 7 days a week.

<Condition> *Optional.* Defines condition that should be met on the agent machine in order to apply the policy rule.

Default value: if the element is missing the policy is applied unconditionally.

<ActionTrigger> *Optional.* Defines an event that triggers the policy action. Note: Applicable to RunScript (action=9) policy only.

<Targets> *Depends on policy action.* <Targets> element contains collection of policy targets. The element is present only if the policy is applicable to applications, scripts, installation files etc. If policy is applicable to computer (Restart/RunScript/etc.) the element is not present.

Special case: If ElevateOnDemand or CollectPolicyAutomation policy doesn't contain Targets element, it means the policy should be applied to all supported targets.

<EmbeddedScript> - Only if policy action is VFPA_RUN_SCRIPT. Contains the script to execute.

<Configuration> - Only if policy action is VFPA_CONFIGURATION. Contains agent configuration parameters.

<Alert> *Depends on policy action.* <Alert> element defines end-user alert (dialog or balloon) which is triggered by the policy. Policy can contain zero or more Alert elements.

So <Policy> element structure looks as follows

```
<Policy id="123"name="Elevate Wordpad" action="3" mav="11.7">
  <UserGroupList>
    <User/>
    <User/>
  </UserGroupList>
  <Scheduler/>
  <Condition/>
```

```
<Targets>
...
</Targets>
</Policy>
```

Or

```
<Policy id="345"name="Run Script Every Monday" action="10">
  <Scheduler weekdays="2" startTime="10:00" />
  <Condition/>
  <EmbeddedScript>
    ...
  </EmbeddedScript>
</Policy>
```

<DeletedPolicy> element

DeletedPolicy element defines a policy deleted since the last update. Not valid in GPO mode. Valid only if the parent <Policies> element has **merge** attribute value **True**.

Path: [/Policies/DeletedPolicy](#)

Attributes

id	Number	Defines the unique policy id.
name	String	Defines policy display name. Its value is used for visualization only. For identification use the id attribute value.

Child elements

No child elements.

Example:

```
<DeletedPolicy id="1939"name="Elevate Process Monitor"/>
```

<ApplicationGroups> element

<ApplicationGroups> element is just a parent element for collection of <ApplicationGroup> elements.

Path: [/Policies/ApplicationGroups](#)

Attributes

No attributes.

Child elements

[<ApplicationGroup>](#) element.

```
<ApplicationGroups>
  <ApplicationGroup/>
  <ApplicationGroup/>
</ApplicationGroups>
```

<ApplicationGroup> element

Path

Path	Meaning
/Policies/ApplicationGroups/ApplicationGroup	<ApplicationGroup> element when placed under /Policies/ApplicationGroups element defines a collection of target applications that can be linked to one or more policies.
/Policies/Policy/Targets/ApplicationGroup	<ApplicationGroup> element when placed under /Policies/Policy/Targets element defines a link to application group defined in the same XML.

Attributes

id	G UID	Defines the unique application group id.
name	String	Defines application group display name. Its value is used for visualization only. For identification use the id attribute value.
merge	Boolean	<i>Valid only when ApplicationGroup element is under /Policies/ApplicationGroups. Not valid in GPO mode.</i> If the merge attribute value is False and ApplicationGroup with the same ID already exists, then the existing ApplicationGroup is deleted and replaced with the new one. If the merge attribute value is True then new ApplicationGroup targets are merged with existing ApplicationGroup targets having the same ID. So when sending only the targets changed/deleted since the last update merge attribute should be True. Default value: False.
token	G UID	<i>Valid only when ApplicationGroup element is under /Policies/Policy/Targets/. Depends on policy action.</i> For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the applications (tasks etc) within the group. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id.

Child elements

Important: *Child elements are valid only when ApplicationGroup is under [/Policies/ApplicationGroups](#).*

Each child element can appear zero or more times.

<Executable> Defines target files which can be executable.

<MacExecutable> - *MacOS specific.* Defines macOS target files which can be executable.

<LinuxCommand> LinuxCommand specific. Defines Linux target command

<Script> Defines target script files (*.bat, *.vbs, *.js, *.hta, etc).

<MSI> Defines target MSI installation files (*.msi and *.msp).

<MSU> Defines target MSU (MS Update) files (*.msu).

<COM> Elevated out-of-process COM object.

<AdminTask> - Defines predefined administrative task.

<MacAdminTask> - *MacOS specific.* Defines predefined administrative task on MacOS.

<ActiveXInstall> defines ActiveX controls allowed to be installed with elevated privileges.

<URL> - Defines URL to be shown in VF Browser with Elevated Privileges.

<InstSrc> - Defines installation source.

<FSEntry> - Defines file system entry (file or directory). Applicable to SetSecurity policy only.

<RegKey> - Defines registry key. Applicable to SetSecurity policy only.

<Service> - Defines Windows Service. Applicable to SetSecurity policy only.

<UsdDev> - Defines USB device. Applicable to SetSecurity policy only.

<OpticalDisc> - Defines CD/DVD disc. Applicable to SetSecurity policy only.

<DeletedTarget> - Defines a target deleted since the last update. Not valid in GPO mode. Valid only if the parent [<ApplicationGroup>](#) element has **merge** attribute value **True**.

Example:

```
<ApplicationGroups>
  <ApplicationGroup id="1234" name="Wonderful Apps">(defines application group)
    <Executable/>
    <MacExecutable/>
    <LinuxCommand/>
    <MSI/>
    <AdminTask/>
    <ActiveXInstall/>
    <URL/>
    <InstSrc/>
    <DeletedTarget/>
  </ApplicationGroup>
```



```

</ApplicationGroups>
...
<Policy>
  <Targets>
    <ApplicationGroup id="1234" <!--defines link to application group above-->
      token="{8ED5B74E-A259-4315-9810-EB795FBD4A98}" />
    ...
  </Targets>
  ...
</Policy>

```

<Targets> element

Targets element defines a collection of policy targets (applications, tasks etc).

Path: [/Policies/Policy/Targets](#)

Attributes

No attributes.

Child elements

Each child element can appear zero or more times.

[<Executable>](#) Defines target files which can be executable.

[<MacExecutable>](#) - *MacOS specific*. Defines macOS target files which can be executable.

[<LinuxCommand>](#) LinuxCommand specific. Defines Linux target command

[<Script>](#) Defines target script files (*.bat, *.vbs, *.js, *.hta, etc).

[<MSI>](#) Defines target MSI installation files (*.msi and *.msp).

[<MSU>](#) Defines target MSU (MS Update) files (*.msu).

[<COM>](#) Elevated out-of-process COM object.

[<AdminTask>](#) - Defines predefined administrative task.

[<MacAdminTask>](#) - *MacOS specific*. Defines predefined administrative task on MacOS.

[<ActiveXInstall>](#) defines ActiveX controls allowed to be installed with elevated privileges.

[<URL>](#) - Defines URL to be shown in VF Browser with Elevated Privileges.

[<InstSrc>](#) - Defines installation source.

[<FSEntry>](#) - Defines file system entry (file or directory). Applicable to SetSecurity policy only.

[<RegKey>](#) - Defines registry key. Applicable to SetSecurity policy only.

[<Service>](#) - Defines Windows Service. Applicable to SetSecurity policy only.

[<UsdDev>](#) - Defines USB device. Applicable to SetSecurity policy only.

[<OpticalDisc>](#) - Defines CD/DVD disc. Applicable to SetSecurity policy only.

[<Exclude>](#) Defines files/folders/users excluded by VF Agent. Applicable in context of Exclude policy only. Not applicable within an ApplicationGroup.

[<ApplicationGroup>](#) - defines id of the application group. The ApplicationGroup element under the Targets element doesn't contain application group definition but only a link to application group defined separately in the same XML. When this element is present, the XML should also include [/Policies /ApplicationGroups/ApplicationGroup](#) with the same id.

Example:

```

<Policy>
  <Targets>
    <Executable/>
    <MacExecutable/>
    <LinuxCommand/>
    <Script/>
    <MSI/>
    <MSU/>
    <URL/>
    <AdminTask/>
    <ActiveXInstall/>
    <URL/>
    <InstSrc/>
    <FSEntry/>
    <RegKey/>
    <ApplicationGroup/>
  </Targets>
  ...
</Policy>

```

<Tokens> element

<Tokens> element is just a parent element for collection of <Token> elements.

Path: [/Policies/Tokens](#)

Attributes

No attributes.

Child elements

[<Token>](#) element

Example:

```
<Tokens>
  <Token/>
  <Token/>
</Tokens>
```

<Token> element

Defines **changes** to be made within security token of target application.

Path: [/Policies/Tokens/Token](#)

Important: Token element doesn't contain a full description of the security token to be assigned to the target application. The new token is produced by taking the existing token as a template and then performing the changes specified in the Token element.

Attributes

| | | |
|-----------------------|--|--|
| id | GUID | Defines the unique token id. |
| name | name | Defines token display name. Its value is used for visualization only. For identification use the id attribute value. |
| integrityLevel | Ox prefixed 16-bit hex integer. E.g. "0x3000"

Optional. | Defines Integrity Level assigned to target application.
Default value: if integrityLevel attribute is missing then target application Integrity Level is left unchanged. |

Child elements

[<Groups>](#) Collection of [<Group>](#) elements.

[<Privileges>](#) - Collection of [<Privilege>](#) elements.

[<TokenOwner>](#) - Defines if and how to change the TokenOwner field (*TokenOwner field contains the default owner SID that will be applied to newly created objects*). The <TokenOwner> element is *optional*. If <TokenOwner> element is missing the TokenOwner field is set automatically according to the following rule - if built-in Administrators group is enabled the TokenOwner field is set to S-1-5-32-544 (built-in Administrators group SID), otherwise the TokenOwner field value stays unchanged.

Example:

```
<Token id="{8ED5B74E-A259-4315-9810-EB795FBD4A98}" name="CustomToken" integrityLevel="0x3000">
  <TokenOwner action="set" SID="S-1-5-21-326923523-3941305716-766540770-1131" name="DOM\Name"/>
  <Group name=".Administrators" deny="true"/>
  <Groups>
    <Group name=".Administrators" deny="true"/>
    <Group SID="S-1-5-21-326923523-3941305716-766540770-1131" name="DOM\Name"/>
  </Groups>
  <Privileges>
    <Privilege name="SeBackupPrivilege"/>
    <Privilege name="SeCreateGlobalPrivilege" deny="true"/>
  </Privileges>
</Token>
```

<Groups> element

<Groups> element is just a parent element for collection of <Group> elements.

Path: [/Policies/Tokens/Token/Groups](#)

Attributes

No attributes.

Child elements

[<Group>](#) element.

<Group> element

Defines a security group to add/remove within security token.

Path: [/Policies/Tokens/Token/Groups/Group](#)

Attributes

| | | |
|-------------|-----------------------|--|
| SID | String.
Optional. | Defines the security group SID.

Default value: if SID attribute is missing or its value is empty the name attribute value is used to resolve the account. |
| name | String | Defines account name in DOMAIN\Name format. If SID attribute is present and non-empty then name is used for visualization only. Otherwise the name is used to resolve the account SID.
Following name formats are supported:
<i>DOMAIN\Name</i> - for domain accounts
<i>.\Name</i> , <i>BUILTIN\Name</i> , <i>ComputerName\Name</i> for local and built-in accounts. |
| deny | Boolean.
Optional. | If True the security group is removed from the token groups list. Otherwise the group is added to token groups list.
Default value: False |

Child elements

No child elements

Example:

```
<Groups>
  <Group name=".Administrators" deny="true"/>
  <Group SID="S-1-5-21-326923523-3941305716-766540770-1131" name="DOM\Name"/>
</Groups>
```

<Privileges> element

<Privileges> element is a parent element for collection of <Group> elements.

Path: [/Policies/Tokens/Token/Privileges](#)

Attributes

| | | |
|------------------|-----------------------|--|
| removeAll | Boolean.
Optional. | If True all existing privileges are removed from the token before adding privileges defined by child <Privilege> elements. Otherwise the privileges defined by child <Privilege> elements are added/removed on top of the existing token privileges
Default value: False |
|------------------|-----------------------|--|

Child elements

[<Privilege>](#) element.

<Privilege> element

Defines a security group to add/remove within security token.

Path: [/Policies/Tokens/Token/Privileges/Privilege](#)

Attributes

| | | |
|-------------|--------------------|--|
| name | String | One of the standard privilege constants : "SeAssignPrimaryTokenPrivilege", "SeAuditPrivilege" etc. |
| deny | Boolean. Optional. | If True the privilege is removed from the token privileges. Otherwise the privilege is added to token privileges.
Default value: False |

Child elements

No child elements.

Example 1:

Add *SeBackupPrivilege* to the existing privileges.

Remove *SeCreateGlobalPrivilege* from the existing privileges.

```
<Privileges>
  <Privilege name="SeBackupPrivilege"/>
  <Privilege name="SeCreateGlobalPrivilege" deny="true"/>
</Privileges>
```

Example 2:

Remove all existing privileges

Then add *SeBackupPrivilege* and *SeCreateGlobalPrivilege* privileges.

```
<Privileges removeAll="true">
  <Privilege name="SeBackupPrivilege"/>
  <Privilege name="SeCreateGlobalPrivilege"/>
</Privileges>
```

<TokenOwner> element

Defines if and how to change the TokenOwner field (*TokenOwner field contains the default owner SID that will be applied to newly created objects*). The <TokenOwner> element is *optional*. If <TokenOwner> element is missing the TokenOwner field is set automatically according to the following rule - if built-in Administrators group is enabled the TokenOwner field is set to S-1-5-32-544 (built-in Administrators group SID), otherwise the TokenOwner field value stays unchanged.

Path: [/Policies/Tokens/Token/TokenOwner](#)

Attributes

| | | |
|---------------|-------------------|---|
| action | String | One of the following values:
" auto " - TokenOwner field is set automatically according to the following rule: <ul style="list-style-type: none">If built-in Administrators group is enabled the TokenOwner field is set to S-1-5-32-544 (built-in Administrators group SID)Otherwise the TokenOwner field value stays unchanged.
" nochange " - TokenOwner field is not modified
" set " TokenOwner field is set to the given SID. IMPORTANT: the specified SID must be present in the TokenGroups list. |
| SID | String. Optional. | This attribute is valid if and only if action attribute value is " set ". Defines SID to assign to the TokenOwner field.
Default value: if SID attribute is missing or its value is empty the name attribute value is used to resolve the account. |
| name | String | This attribute is valid if and only if action attribute value is " set ". Defines account name in DOMAIN\Name format. If SID attribute is present and non-empty then name is used for visualization only. Otherwise the name is used to resolve the account SID.
Following name formats are supported:
<i>DOMAIN\Name</i> - for domain accounts
<i>.\Name</i> , <i>BUILTIN\Name</i> , <i>ComputerName\Name</i> for local and built-in accounts. |

Child elements

No child elements

Examples:

```
<TokenOwner action="auto"/>
```

```
<TokenOwner action="nochange"/>
```

```
<TokenOwner action="set" SID="S-1-5-21-326923523-3941305716-766540770-1131" name="DOM\Name"/>
```

<RestrictionRules> element

<RestrictionRules> element is just a parent element for collection of [<RestrictionRule>](#) elements.

Path: [/Policies/RestrictionRules](#)

Attributes

No attributes.

Child elements

[<RestrictionRule>](#) element

Example:

```
<RestrictionRules>
  <RestrictionRule id="{D154B7F5-2FEA-4272-B0AB-957492F5FE8C}" name="First Restriction">
    <RstrPaths allow="false">
      <RstrPath>D:\bad directory</RstrPath>
    </RstrPaths>
    <RstrNetworks allowInternet="false">
      <RstrIPv4 allow="false" order="5" ip="10.10.10.10"/>
      <RstrIPv4Range allow="true" order="10" ipFrom="10.10.200.100" ipTo="10.10.200.104"/>
      <Hostname allow="false" order="121" host="www.google.com">
    </RstrNetworks>
    <RstrMemory allow="False" trace="True" showDlg="True" restrEvent="True" />
  </RestrictionRule>
</RestrictionRules>
```

<RestrictionRule> element

Defines restriction rules for an application run in isolated mode

Path: [/Policies/RestrictionRules/RestrictionRule](#)

Attributes

| | | |
|-------------|--------|---|
| id | GUID | Defines the unique restriction rule id. |
| name | String | Defines restriction rule display name. Its value is used for visualization only. For identification use the id attribute value. |

Child elements

[<RstrPaths>](#)

[<RstrKeys>](#)

<NetShares>
<RstrNetworks>
<RstrMemory>

See <RestrictionRules> [example](#).

<RstrPaths> element

Parent element for a collection of <RstrPath>elements for restricted access applications.

Path: /Policies/RestrictionRules/RestrictionRule/RstrPaths

Attributes

| | | |
|-------------------|--------------------|---|
| id | GUID | Defines unique id of this rule. |
| allow | Boolean. Optional. | Defines if application can access all paths except specified in a list <RstrPath>. Default is True |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |

Child elements

<RstrPath>

See <RestrictionRules> [example](#).

<RstrPath> element

Defines a specific File System path for restricted access applications.

Path: /Policies/RestrictionRules/RestrictionRule/RstrPaths/RstrPath

Attributes

| | | |
|-------------------|--------------------|---|
| id | GUID. Optional. | Defines unique id of this rule. |
| order | Number | The attribute sets this specific network rule precedence.

IMPORTANT: Due to historical mistake and the need to be backward compatible, restriction rules with lower order value have lower precedence . E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning. |
| allow | Boolean. Optional. | Defines if application can access the specified path. Default is True. |
| isFile | Boolean. Optional. | Defines if path is folder or file. Default is False. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |

| | | |
|----|-----|--|
| nt | al. | |
|----|-----|--|

Child elements

No child elements

Element text

Contains a specific path.

See <RestrictionRules> [example](#).

<RstrKeys> element

Is a parent node for a collection of <RstrKey> elements for restricted access applications.

Path: /Policies/RestrictionRules/RestrictionRule/RstrKeys

Attributes

| | | |
|-------------------|--------------------|---|
| allow | Boolean. Optional. | Defines if application can access internet Registry keys not specified in list <RstrKey>. Default is True. |
| id | GUID. Optional. | Defines unique id of this rule. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |

Child elements

<RstrKey>

See <RestrictionRules> [example](#).

<RstrKey> element

Defines a specific Registry key for isolated mode applications.

Path: /Policies/RestrictionRules/RestrictionRule/RstrKeys/RstrKey

Attributes

| | | |
|----------------|--------------------|---|
| allow | Boolean. Optional. | Defines if application can access the specified key. Default is True |
| id | GUID. Optional. | Defines unique id of this rule. |
| order | Number | The attribute sets this specific network rule precedence.

IMPORTANT: Due to historical mistake and the need to be backward compatible, restriction rules with lower order value have lower precedence . E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |

| | | |
|-------------------|--------------------|---|
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |
|-------------------|--------------------|---|

Child elements

No child elements

Element text

Contains a specific registry key.

See <RestrictionRules> [example](#).

<NetShares> element

Is a parent node for a collection of [<NetShare>](#) elements for isolated mode applications.

Path: [/Policies/RestrictionRules/RestrictionRule/NetShares](#)

Attributes

| | | |
|-------------------|--------------------|---|
| allow | Boolean. Optional. | Defines if application can access Network Shares not specified in list <NetShare> . Default is True. |
| id | GUID. Optional. | Defines unique id of this rule. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |

Child elements

[<NetShare>](#) element

See <RestrictionRules> [example](#).

<NetShare> element

Defines a specific Network Share for isolated mode applications.

Path: [/Policies/RestrictionRules/RestrictionRule/NetShares/NetShare](#)

Attributes

| | | |
|--------------|--------------------|---|
| allow | Boolean. Optional. | Defines if application can access the specified Network Share. Default is True |
| id | GUID. Optional | Defines unique id of this rule. |
| order | Number | The attribute sets this specific network rule precedence.

IMPORTANT: Due to historical mistake and the need to be backward compatible, restriction rules with lower order value have lower precedence . E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| | | |

| | | |
|-------------------|--------------------|---|
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |

Child elements

No child elements

Element text

Contains a specific Network Share path.

See <RestrictionRules> [example](#).

<RstrMemory> element

Is a node defining memory access rules for restricted access application.

Path: [/Policies/RestrictionRules/RestrictionRule/RstrMemory](#)

Attributes

| | | |
|-------------------|--------------------|---|
| allow | Boolean. Optional. | Defines if application can access memory of other processes. Default is True |
| id | GUID. Optional. | Defines unique id of this rule. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |

Child elements

No child elements

Element text

None

See <RestrictionRules> [example](#).

<RstrNetworks> element

Is a parent node for a collection of network entities (hosts, ranges, etc.) for isolated mode application.

Path: [/Policies/RestrictionRules/RestrictionRule/RstrNetworks](#)

Attributes

| | | |
|------------------------|--------------------|--|
| allowInternet | Boolean. Optional. | Defines if application can access internet, whatever it is. Default is True |
| internetId | GUID, Optional. | Defines unique id of this rule. |
| traceInternet | Boolean. Optional. | Defines if access to Internet should be traced in driver. Default is False |
| showDlgInternet | Boolean. | Defines if a dialog should be shown in case of access to Internet (Dialog is shown first time only). Default is False |

| | | |
|----------------------------|-----------------------|---|
| | Optional. | |
| restrEventInternet | Boolean.
Optional. | Defines if an event should be sent to manager in case of access to Internet (Event is generated first time only). Default is False |
| sendEventsInternet | Boolean.
Optional. | Defines if all access events should be sent to Manager. Default is False |
| allowIntranet | Boolean.
Optional. | Defines if application can access intranet, whatever it is. Default is True |
| intranetId | GUID,
Optional. | Defines unique id of this rule. |
| traceIntranet | Boolean.
Optional. | Defines if access to Intranet should be traced in driver. Default is False |
| showDlgIntranet | Boolean.
Optional. | Defines if a dialog should be shown in case of access to Intranet (Dialog is shown first time only). Default is False |
| restrEventIntranet | Boolean.
Optional. | Defines if an event should be sent to manager in case of access to Intranet (Event is generated first time only). Default is False |
| sendEventsIntranet | Boolean.
Optional. | Defines if all access events should be sent to Manager. Default is False |
| blockIfNeedMoreData | Boolean.
Optional. | Defines if connection should be blocked or allowed if Agent is not able to determine a known protocol (i.e., http) from the first data block. Default is False |

Child elements

[<RstrIPv4>](#)
[<RstrIPv4Range>](#)
[<RstrIPv6>](#)
[<RstrIPv6Range>](#)
[<RstrHostname>](#)

See <RestrictionRules> [example](#).

<RstrIPv4> element

Defines a specific IP address for isolated mode applications.

Path: [/Policies/RestrictionRules/RestrictionRule/RstrNetworks/RstrIPv4](#)

Attributes

| | | |
|-------------------|-----------------------|---|
| allow | Boolean.
Optional. | Defines if access to a specific IP is allowed or forbidden. Default is True. |
| id | GUID | Defines unique id of this rule. |
| ip | String | IPv4 Address. E.g. "192.10.18.201" |
| order | Number | The attribute sets this specific network rule precedence.

IMPORTANT: Due to historical mistake and the need to be backward compatible, restriction rules with lower order value have lower precedence . E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning. |
| trace | Boolean.
Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean.
Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean.
Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |

| | | |
|-----------------------|--------------------|---|
| | al. | |
| send NetEvents | Boolean. Optional. | Defines if all access events should be sent to Manager. Default is False |

Child elements

No child elements

See <RestrictionRules> [example](#).

<RstrIPv6> element

Defines a specific IP address for isolated mode applications.

Path: /Policies/RestrictionRules/RestrictionRule/RstrNetworks/RstrIPv6

Attributes

| | | |
|-----------------------|--------------------|---|
| allow | Boolean. Optional. | Defines if access to a specific IP is allowed or forbidden. Default is True. |
| id | GUID | Defines unique id of this rule. |
| ip | String | IPv6 Address. E.g. "2001:0db8:85a3:0000:0000:8a2e:0370:7334" |
| order | Number | The attribute sets this specific network rule precedence.

IMPORTANT: Due to historical mistake and the need to be backward compatible, restriction rules with lower order value have lower precedence . E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |
| send NetEvents | Boolean. Optional. | Defines if all access events should be sent to Manager. Default is False |

Child elements

No child elements

See <RestrictionRules> [example](#).

<RstrIPv4Range> element

Defines a specific IP address for isolated mode applications.

Path: /Policies/RestrictionRules/RestrictionRule/RstrNetworks/RstrIPv4Range

Attributes

| | | |
|----------------------|--------------------|---|
| allow | Boolean. Optional. | Defines if access to a specific IP range is allowed or forbidden. Default is True. |
| id | GUID | Defines unique id of this rule. |
| ipFrom | String | First IPv4 address in the range |
| ipTo | String | Last IPv4 address in the range |
| order | Number | The attribute sets this specific network rule precedence.

IMPORTANT: Due to historical mistake and the need to be backward compatible, restriction rules with lower order value have lower precedence . E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| showDlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restrEvent | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |
| sendNetEvents | Boolean. Optional. | Defines if all access events should be sent to Manager. Default is False |

Child elements

No child elements

See <RestrictionRules> [example](#).

<RstrIPv6Range> element

Defines a specific IP address for isolated mode applications.

Path: /Policies/RestrictionRules/RestrictionRule/RstrNetworks/RstrIPv6Range

Attributes

| | | |
|---------------|--------------------|---|
| allow | Boolean. Optional. | Defines if access to a specific IP range is allowed or forbidden. Default is True. |
| id | GUID | Defines unique id of this rule. |
| ipFrom | String | First IPv6 address in the range |
| ipTo | String | Last IPv6 address in the range |
| order | Number | The attribute sets this specific network rule precedence.

IMPORTANT: Due to historical mistake and the need to be backward compatible, restriction rules with lower order value have lower precedence . E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |

| | | |
|-----------------------|--------------------|---|
| show Dlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restr Event | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |
| send NetEvents | Boolean. Optional. | Defines if all access events should be sent to Manager. Default is False |

Child elements

No child elements

See <RestrictionRules> [example](#).

<RstrHostname> element

Defines a specific IP address for isolated mode applications.

Path: /Policies/RestrictionRules/RestrictionRule/RstrNetworks/RstrHostname

Attributes

| | | |
|-----------------------|--------------------|---|
| allow | Boolean. Optional. | Defines if access to a specific host is allowed or forbidden. Default is True. |
| id | GUID | Defines unique id of this rule. |
| host | String | FQDN. E.g. "somehost.example.com" |
| order | Number | The attribute sets this specific network rule precedence.

IMPORTANT: Due to historical mistake and the need to be backward compatible, restriction rules with <i>lower order</i> value have <i>lower precedence</i> . E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning. |
| trace | Boolean. Optional. | Defines if access should be traced in driver. Default is False |
| show Dlg | Boolean. Optional. | Defines if a dialog should be shown (Dialog is shown first time only). Default is False |
| restr Event | Boolean. Optional. | Defines if an event should be sent to manager (Event is generated first time only). Default is False |
| send NetEvents | Boolean. Optional. | Defines if all access events should be sent to Manager. Default is False |

allow [Optional](#). Boolean. Default is True. Defines if access to a specific IP is allowed or forbidden.

id [Optional](#). GUID string. Defines unique id of this rule.

host FQDN String.

order - Number. The attribute sets this specific network rule precedence. **IMPORTANT:** Due to historical mistake and the need to be backward compatible, restriction rules with *lower order* value have *lower precedence*. E.g. rule with order 7 is more important than rule with order 4. Do not be confused. The value of the 'order' attribute on <Policy> element has opposite meaning.

trace [Optional](#). Boolean. Defines if access should be traced in driver. Default is False

showDlg *Optional*. Boolean. Defines if a dialog should be shown (Dialog is shown first time only). Default is False
restrEvent *Optional*. Boolean. Defines if an event should be sent to manager (Event is generated first time only). Default is False
sendNetEvents *Optional*. Boolean. Defines if all access events should be sent to Manager. Default is False

Child elements

No child elements

See <RestrictionRules> [example](#).

<GUI> element

<GUI> element represents a collection of custom end-user alerts (dialogs, balloons) triggered by policies. It's a parent element for collection of <Dialog> and <Balloon> elements. Policy child element <Alert> (page) links specific policy event to dialog or balloon from <GUI> collection.
Path: [/Policies/GUI](#)

Attributes

No attributes.

Child elements

[<Dialog>](#)
[<Balloon>](#)
[<CommonCode>](#)

Example:

```
<GUI>
  <Dialog/>
  <Dialog/>
  <Balloon/>
  <Balloon/>
</GUI>
```

<Dialog> element

<Dialog> element defines custom end-user dialogs linked to one or more policies.
Path: [/Policies/GUI/Dialog](#)

Attributes

| id | GUID | Defines the unique dialog id. | | | | | | | | | | | | | | | | | | | | |
|------|---|---|---|-------------|---|------------------------------|---|---|---|-------------------------------|---|-------------------|---|----------------------------|---|-----------------------|---|-------------------------------------|---|--------------------------------|----|---|
| type | Number | Type of the dialog. See EvtDialogType enum declaration in VfAgentDeclarations.cs file. Some values: | | | | | | | | | | | | | | | | | | | | |
| | | <table><tr><th>Value</th><th>Dialog type</th></tr><tr><td>1</td><td>Process Blocked notification</td></tr><tr><td>2</td><td>Alert on process start (with "Run Anyway" and "Cancel" buttons)</td></tr><tr><td>3</td><td>Process Elevated notification</td></tr><tr><td>4</td><td>Elevate On Demand</td></tr><tr><td>5</td><td>Zero Touch qualified event</td></tr><tr><td>6</td><td>Manual Policy Request</td></tr><tr><td>7</td><td>Policy Video recording confirmation</td></tr><tr><td>8</td><td>Zero Touch non-qualified event</td></tr><tr><td>10</td><td>Policy Video recording low disk space warning</td></tr></table> | Value | Dialog type | 1 | Process Blocked notification | 2 | Alert on process start (with "Run Anyway" and "Cancel" buttons) | 3 | Process Elevated notification | 4 | Elevate On Demand | 5 | Zero Touch qualified event | 6 | Manual Policy Request | 7 | Policy Video recording confirmation | 8 | Zero Touch non-qualified event | 10 | Policy Video recording low disk space warning |
| | | Value | Dialog type | | | | | | | | | | | | | | | | | | | |
| | | 1 | Process Blocked notification | | | | | | | | | | | | | | | | | | | |
| | | 2 | Alert on process start (with "Run Anyway" and "Cancel" buttons) | | | | | | | | | | | | | | | | | | | |
| | | 3 | Process Elevated notification | | | | | | | | | | | | | | | | | | | |
| | | 4 | Elevate On Demand | | | | | | | | | | | | | | | | | | | |
| | | 5 | Zero Touch qualified event | | | | | | | | | | | | | | | | | | | |
| | | 6 | Manual Policy Request | | | | | | | | | | | | | | | | | | | |
| | | 7 | Policy Video recording confirmation | | | | | | | | | | | | | | | | | | | |
| | | 8 | Zero Touch non-qualified event | | | | | | | | | | | | | | | | | | | |
| 10 | Policy Video recording low disk space warning | | | | | | | | | | | | | | | | | | | | | |

| | | | | |
|-------------|--------|--|-------------------------------------|--|
| | | 11 | LogOff / Restart / Shutdown warning | |
| name | Number | Defines human readable name of the dialog. Its value is not used for identification. For readability only. | | |

Child elements

CDATA element containing the dialog HTML content.

Note, that the dialog code may contain references to CommonCode blocks (see [<CommonCode>](#) element). **The CommonCode id string is Case-Sensitive.**

Element text

```
<Dialog id="{059ACB23-BBF2-400B-A5AB-B69AD39145A0}" type="2" name="On-Demand elevation justification">
  <![CDATA[
    <html>
      Dialog content here
    </html>
  ]]>
</Dialog>
```

<Balloon> element

<Balloon> element defines custom end-user notification shown in a form of Windows notification area balloon.

Path: [/Policies/GUI/Balloon](#)

Attributes

| | | |
|-------------|--------|---|
| id | GUID | Defines the unique balloon message id. |
| name | String | Defines human readable name of the message. Its value is not used for identification. For readability only. |

Child elements

[<Title>](#) Contains balloon title.

[<Text>](#) Contains message to be shown to the end-user.

Note: Each <Balloon> element may contain multiple <Title> and multiple <Text> children corresponding to different languages.

```
<Balloon id="{059ACB23-BBF2-400B-A5AB-B69AD39145A0}" name="On Block">
  <Title lang="en" default="True">End-point Privilege Manager</Title>
  <Text lang="en" default="True">This application is prohibited by your system administrator.</Text>
  <Title lang="ru-RU"> 4.0</Title>
  <Text lang="ru-RU">    </Text>
</Balloon>
```

<Title> and <Text> elements

Define Balloon title and text.

Path: [/Policies/GUI/Balloon/Title](#)

Path: [/Policies/GUI/Balloon/Text](#)

Attributes

| | | |
|----------------|-----------------------|---|
| lang | String | Defines language name. See the link below for possible values:
http://msdn.microsoft.com/en-us/library/ee825488.aspx |
| default | Boolean.
Optional. | There can be only one language marked as default.
When the Agent cannot find appropriate language it tries available alternatives in the following order. |

| | | |
|--|--|--|
| | | <ol style="list-style-type: none">1. Parent language. E.g. if user uses "en-US" and balloon definition doesn't contain contains "en-US" language but contains "en" then agent uses "en".2. Default language. The one that has "default" attribute value "True".3. If no language is marked as default the agent may choose any language randomly <p>Default value: False.</p> |
|--|--|--|

Child elements

No child elements.

Element text

Balloon title and balloon message text

Example:

```
<Balloon id="{059ACB23-BBF2-400B-A5AB-B69AD39145A0}" name="On Block">
  <Title lang="en" default="True">End-point Privilege Manager</Title>
  <Text lang="en" default="True">This application is prohibited by your system administrator.</Text>
  <Title lang="ru-RU"> 4.0</Title>
  <Text lang="ru-RU">    </Text>
</Balloon>
```

<CommonCode> element

Path: [/Policies/GUI/CommonCode](#)
<CommonCode> element defines a common part of end-user dialog HTML code (e.g. script, embedded image etc.) that should be used by one or more dialogs. The idea is avoiding code duplication and thus reducing the traffic.

Attributes

| | | |
|----|--------|---|
| id | String | Defines the unique common code id. The agent will search for this string within each dialog code and replace it with the <CommonCode> element content.

The id string is Case-Sensitive. |
|----|--------|---|

Child elements

```
<CommonCode id="SomeUniqueId">
<![CDATA[
    Common dialog code here
]]>
</CommonCode>
```

<Alert> element

<Alert> element defines notification (dialog or balloon) to be shown to the end-user when particular policy event occurs.
Path: [/Policies/Policy/Alert](#)

Attributes

| | | |
|---------|--------|--|
| type | String | Can be either "Dialog" or "Balloon" |
| id | GUID | Defines the unique dialog or balloon id. Corresponding element must be present in the /Policy/GUI collection |
| trigger | Number | One of the EvfAlertTrigger values. Depends on policy type. See Alert triggers and dialog types table. |

Child elements

None.

```
<Alert trigger="1" type="Dialog" id="123465">
<Alert trigger="2" type="Balloon" id="123456">
```

<UserGroupList> element

<UserGroupList> element is just a parent element for collection of <User> elements. Defines user accounts and security groups, the policy is applicable to. It also can be a child of <Executable> element and <Exclude> element. In that case it used to match processes running under specific user accounts (e.g. Local System). It is required for example to identify Software Distributors.

Path: [/Policies/Policy/UserGroupList](#)

Path: [.../TargetType/FileOrigin/UserGroupList](#)

Path: [.../Targets/Exclude/UserGroupList](#)

Path: [.../Targets/Executable/UserGroupList](#)

Attributes

No attributes.

Child elements

[<User>](#) element.

[<AzUser>](#) element

[<AzGroup>](#) element

[<IdpUser>](#) element

[<IdpGroup>](#) element

```
<UserGroupList>
  <User/>
  <User/>
  <AzUser/>
  <AzGroup/>
</UserGroupList>
```

<TargetLocalGroups> element

<TargetLocalGroups> element is just a parent element for collection of <User> elements. It is applicable to AddToLocalGroup (20) policy action. All users/groups specified in <UsersGroupList> element will be added to local security **groups** defined by <TargetLocalGroups>.

Path: [/Policies/Policy/TargetLocalGroups](#)

Attributes

No attributes.

Child elements

[<User>](#)

```
<TargetLocalGroups>
  <User SID=1234567>.\Administrators</User>
  <User>.\remoteAccess</User>
</TargetLocalGroups>
```

<User> element

Defines user account or security group the policy is applicable to.

Path: [/Policies/Policy/UserGroupList/User](#)

Attributes

| | | |
|--------------------|----------------------|--|
| SID | String.
Optional. | Defines the account SID.
Default value: if SID attribute is missing or its value is empty the account name (see Element Text below) is used to resolve the account. |
| accountType | String. | Indicates the account type. Possible values:
"User" the element text represents a user name
"Group" the element text represents a group name

The value is not case sensitive ("user" and "User" are the same) |

Child elements

No child elements

Element Text

The element text defines account name in DOMAIN\Name format. If SID attribute is present and non-empty then the account name is used for visualization only. Otherwise the name is used to resolve the account SID.
Following name formats are supported:
DOMAIN\Name - for domain accounts
.\Name, *BUILTIN\Name*, *ComputerName\Name* for local and built-in accounts.

```
<UserGroupList>
  <User SID="S-1-5-32-544">.\Administrators</User>
  <User>DOM\UserName</User>
</UserGroupList>
```

<IdpUser> element

Defines IdP user account the policy is targeted to.
Path: [/Policies/Policy/UserGroupList/IdpUser](#)

Attributes

Optional attributes like SID or objectID can be added to assist resolve the account.

Child elements

No child elements

Element Text

The element text defines the account name in UPN format. A UPN consists of a UPN prefix (the user account name) and a UPN suffix (a DNS domain name). The prefix is joined with the suffix using the "@" symbol.

```
<UserGroupList>
  <IdpUser SID="S-1-5-32-544">john.silverthornebloom@cyberark.com</IdpUser>
</UserGroupList>
```

<IdpGroup> element

Defines IdP group (role) the policy is targeted to.
Path: [/Policies/Policy/UserGroupList/IdpGroup](#)

Attributes

Optional attributes like GID can be added to assist in resolving the group.

Child elements

No child elements

Element Text

The element text defines the IdP group name. In order to support multiple domains within the same organization, the format will be as follows:

<Domain part of UPN>\<Group name>

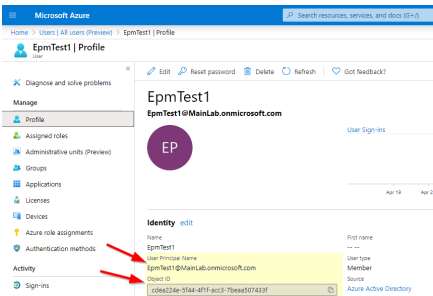
```
<UserGroupList>
  <IdpGroup>cyberark.com\finance_readonly_access</IdpGroup>
</UserGroupList>
```

<AzUser> element

Defines Azure user account the policy is applicable to.

Path: /Policies/Policy/UserGroupList/AzUser

Attributes

| | | |
|--|-----------------|--|
| object id | GUID. Optional. | Defines the Azure User ObjectID (see screenshot below).
Default value: if Objectid attribute is missing or its value is empty the User Principal Name (UPN) is used to resolve the account (see the Element Text below).  Note, that for better performance and reliability, it is preferable to have Objectid defined. |
|  | | |

Child elements

No child elements

Element Text

The element text defines the account **User Principal Name** (email used for Azure AD login). If **Objectid** attribute is present and non-empty then the UPN is used for visualization only. Otherwise, the UPN is used in API calls instead of the Objectid.

For more details on Azure UPN see <https://docs.microsoft.com/en-us/azure/active-directory/hybrid/plan-connect-userprincipalname>

Specifying UPN **without Objectid** may be useful in the following scenario. EPM Admin adds users to a policy but, for some reason, he cannot get list of users in the EPM GUI and he has to enter users manually. In this case, it is easier to add UPN (email) than ObjectID (GUID).

```
<UserGroupList>
  <User SID="S-1-5-32-544">.\Administrators</User>
  <User>DOM\UserName</User>
  <AzUser ObjectId="{cdea224e-5f44-4f1f-acc3-7beaa507433f}">EpmTest1@mainlab.onmicrosoft.com<AzUser>
  <AzUser>john.smith@mainlab.onmicrosoft.com<AzUser>
  <AzGroup ObjectId="{96ad358f-d4de-47a9-8c85-fed47f0a0d80}">EPM-Test-Group-Parent</AzGroup>
</UserGroupList>
```

<AzGroup> element

Defines Azure group the policy is applicable to.
Path: [/Policies/Policy/UserGroupList/AzGroup](#)

Attributes

| | | |
|-----------------|-----------------|---|
| objectId | GUID. Optional. | Defines the Azure Group ObjectID (see attached screenshot). |
|-----------------|-----------------|---|

Child elements

No child elements

Element Text

Optional. Group name. Used for visualization only. Not used for Microsoft Graph API calls.

```
<UserGroupList>
  <User SID="S-1-5-32-544">.\Administrators</User>
  <User>DOM\UserName</User>
  <AzUser ObjectId="{cdea224e-5f44-4f1f-acc3-7beaa507433f}">EpmTest1@mainlab.onmicrosoft.com<AzUser>
  <AzUser>john.smith@mainlab.onmicrosoft.com<AzUser>
  <AzGroup ObjectId="{96ad358f-d4de-47a9-8c85-fed47f0a0d80}">EPM-Test-Group-Parent</AzGroup>
</UserGroupList>
```

<Scheduler> element

For "application-targeted" policies Scheduler element defines when the policy is activated and deactivated automatically based on weekday and local time. For "computer policies" of types Logoff/Restart/RunScript etc. Scheduler element defines weekdays and local time when the requested policy action is executed.
Path: [/Policies/Policy/Scheduler](#)

Attributes

| | | |
|-------------------------|-----------------------|---|
| w e e k d a y s | S
tr
ing | The string is always 7 char long and contains only '0' and '1' chars. Each position is string corresponds to a weekday. The 1 st character from the left corresponds to Sunday, 2 nd character corresponds to Monday etc. '1' character means the policy is active, '0' means the policy is inactive on the corresponding weekday. For example: "1001001" means policy is active on Sunday, Wednesday and Saturday. |
| st a r t t i m e | S
tr
ing | Defines local agent time when the policy should be activated. The string must be exactly 5 characters long in the following format: "HH:MM". The HH value is always in 24h format. |
| e n d T i m e | S
tr
ing | See note below *. Defines local agent time when the policy should be deactivated. The string must be exactly 5 characters long in the following format: "HH:MM". The HH value is always in 24h format.
*Note: For "computer policies" of types Logoff/Restart/RunScript etc. endTime attribute is not present. |

Child elements

No child elements

The below example means: Policy is active every Sunday, Wednesday and Saturday from 09:00 till 23:59.

```
<Scheduler weekdays="1001001" startTime="09:00" endTime="23:59" />
```

<Condition> element

Condition element defines a condition that should be met on the agent machine in order to apply the policy rule.

Path: /Policies/Policy/Condition

Attributes

| type | Number | <p>One of the EvpPolicyCondition values (see VfAgentDeclarations.cs). The attribute defines condition type. The following types are supported:</p> <table><tr><th>type</th><th>Meaning</th><th>Element text</th><th>Child elements</th></tr><tr><td>1</td><td>Domain Controller is accessible</td><td>Ignored. Must be empty.</td><td>none</td></tr><tr><td>2</td><td>Specified URL is accessible</td><td>URL</td><td>none</td></tr><tr><td>3</td><td>Host/IP is accessible via Ping</td><td>Host/IP</td><td>none</td></tr><tr><td>4</td><td>According to Script Execution Result</td><td>Ignored. Must be empty.</td><td><EmbeddedScript></td></tr><tr><td>5</td><td>According to AD security groups</td><td>Ignored. Must be empty.</td><td><IncludeADComputerGroup> <ExcludeADComputerGroup></td></tr><tr><td>6</td><td>According to Computer groups</td><td>Ignored. Must be empty.</td><td><IncludeComputerGroup> <ExcludeComputerGroup></td></tr></table> | type | Meaning | Element text | Child elements | 1 | Domain Controller is accessible | Ignored. Must be empty. | none | 2 | Specified URL is accessible | URL | none | 3 | Host/IP is accessible via Ping | Host/IP | none | 4 | According to Script Execution Result | Ignored. Must be empty. | <EmbeddedScript> | 5 | According to AD security groups | Ignored. Must be empty. | <IncludeADComputerGroup> <ExcludeADComputerGroup> | 6 | According to Computer groups | Ignored. Must be empty. | <IncludeComputerGroup> <ExcludeComputerGroup> |
|----------|--------------------------------------|--|---|---------|--------------|----------------|---|---------------------------------|-------------------------|------|---|-----------------------------|-----|------|---|--------------------------------|---------|------|---|--------------------------------------|-------------------------|------------------|---|---------------------------------|-------------------------|---|---|------------------------------|-------------------------|---|
| type | Meaning | Element text | Child elements | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Domain Controller is accessible | Ignored. Must be empty. | none | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Specified URL is accessible | URL | none | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Host/IP is accessible via Ping | Host/IP | none | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | According to Script Execution Result | Ignored. Must be empty. | <EmbeddedScript> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | According to AD security groups | Ignored. Must be empty. | <IncludeADComputerGroup> <ExcludeADComputerGroup> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | According to Computer groups | Ignored. Must be empty. | <IncludeComputerGroup> <ExcludeComputerGroup> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| expected | Boolean.
Optional. | <p>Applicable to types 1-4 only. If the attribute value is "false" the policy is applicable if the condition expression evaluates to False. For example:</p> <div><pre><Condition type="2" expected="false">http://www.viewfinity.com</Condition></pre></div> <p>means the policy is applicable if the URL is not accessible.
Default value: True (policy is applicable if the given condition expression evaluates to True)</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Child elements

<EmbeddedScript> EmbeddedScript child element is valid only if 'type' attribute value is 4 (see above table).

<IncludeADComputerGroup> and <ExcludeADComputerGroup> - valid only if 'type' attribute value is 5 (see above table).

<IncludeComputerGroup> and <ExcludeComputerGroup> - valid only if 'type' attribute value is 6 (see above table).

Examples of <Condition> element:

```
<Condition type="1"/>
<Condition type="2">http://www.viewfinity.com</Condition>
<Condition type="3" expected="false">192.168.10.10</Condition>
<Condition type="4">
  <EmbeddedScript>...</EmbeddedScript>
</Condition>
<Condition type="5">
  <IncludeADComputerGroup>
    <ADGroup SID="S-1-5-...">DOM\Finance</ADGroup>
    <ADGroup>DOM\Sales</ADGroup >
  </IncludeADComputerGroup >
</Condition>
<Condition type="6">
  <IncludeComputerGroup>
    <AzComputer ObjectId="{7124b837-feb7-412f-b5c3-37f57d33ba69}" accountType="AzComputer">DomainAZ\Computer<
  /AzComputer>
  </IncludeComputerGroup>
  <ExcludeComputerGroup>
    <AzGroup ObjectId="{1234b837-feb7-412f-b5c3-37f57d33ba69}" accountType="AzGroup">DomainAZ\RemoveGroup<
```

```

/AzGroup>
  <AzComputer ObjectId="{051c5044-cef0-4f76-8132-28a2b0ea1624}" accountType="AzComputer"
>DomainAZ\RemoveComputer</AzComputer>
  </ExcludeComputerGroup>
</Condition>

```

<IncludeADComputerGroup> and <ExcludeADComputerGroup> elements

<IncludeADComputerGroup> and <ExcludeADComputerGroup> elements are parent elements for collection of [<ADGroup>](#) elements. Define AD security groups which should contain the AD Computer Account for End-User Computer. I.e. an End-User Computer should belong to a group in <IncludeADComputerGroup> list in order for Policy to be active on a specific computer.

Attributes

None

Child Elements

[<ADGroup>](#)

<ADGroup> element

Defines user account or security group the policy is applicable to.

Attributes

SID	String. Optional.	Defines AD Group SID. Default value: if SID attribute is missing or its value is empty the account name (see Element Text below) is used to resolve the account.
------------	----------------------	--

Element Text

The element text defines AD Group name in DOMAIN\Name format. If SID attribute is present and non-empty then the account name is used for visualization only. Otherwise the name is used to resolve the account SID.

Example:

```

<Condition type="5">
  <IncludeADComputerGroup>
    <ADGroup SID="S-1-5-...">DOM\Finance</ADGroup>
    <ADGroup>DOM\Sales</ADGroup >
  </IncludeADComputerGroup>
</Condition>

```

<IncludeComputerGroup> and <ExcludeComputerGroup> elements

<IncludeComputerGroup> and <ExcludeComputerGroup> elements are parent elements for collection of [<AzGroup>](#) and [<AzComputer>](#) elements. Define Computer groups which should contain the Computer Account for End-User Computer. I.e. an End-User Computer should belong to a group in <IncludeComputerGroup> list in order for Policy to be active on a specific computer.

Attributes

None

Child Elements

<AzGroup>
<AzComputer>

<AzComputer> element

Defines Entra ID (AAD) computer the policy is applicable to.

Attributes

objectId	GUID. Optional.	Defines the Azure Computer ObjectID (see AzUser)
----------	-----------------	---

Element Text

Example:

```
<Condition type="6">
  <IncludeComputerGroup>
    <AzComputer ObjectId="{7124b837-feb7-412f-b5c3-37f57d33ba69}" accountType="AzComputer"
  >DomainAZ\Computer</AzComputer>
  </IncludeComputerGroup>
  <ExcludeComputerGroup>
    <AzGroup ObjectId="{1234b837-feb7-412f-b5c3-37f57d33ba69}" accountType="AzGroup">DomainAZ\RemoveGroup<
  /AzGroup>
    <AzComputer ObjectId="{051c5044-cef0-4f76-8132-28a2b0ea1624}" accountType="AzComputer"
  >DomainAZ\RemoveComputer</AzComputer>
  </ExcludeComputerGroup>
</Condition>
```

<ActionTrigger> element

Path: [/Policies/Policy/ActionTrigger](#)

ActionTrigger element defines an event that triggers the policy action. A policy might contain multiple <ActionTrigger> child elements. E.g. if you want the same script to run on logon and logoff you may define 2 triggers in the same policy.

Note: Applicable to RunScript (action=9) policy only

Attributes

type	Number	One of the EvfPolicyActionTrigger values (see VfAgentDeclarations.cs). The attribute defines trigger event type. The following types are supported:		
		type	Meaning	Element text
		1	On user logon	Ignored. Must be empty.
		2	On user logoff	Ignored. Must be empty.
		3	On computer startup	Ignored. Must be empty.
		4	On set new policy	Ignored. Must be empty.
		Child elements		

Child elements

None.

Example of <ActionTrigger> element:

```
<ActionTrigger type="1"/>
```

<Executable> element

<Executable> element defines policy target. It can represent single EXE/COM file or many files if defines location or publisher or uses wildcards in filename.

Path 1: /Policies/Policy/Targets/Executable

Path 2: /Policies/ApplicationGroups/ApplicationGroup/Executable

Attributes

targetId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
inheritable	Boolean. Optional.	If the value is <i>False</i> the policy rule is applied to the process that corresponds to the <Executable> element, but not applied to child processes. If the value is <i>True</i> the policy rule is also applied to the entire child processes hierarchy. Default value: <i>False</i>.
cacheable	Boolean. Optional.	If the value is <i>False</i> the policy match result is not cached in the driver. By default, if for instance the agent service returns BLOCK answer to the driver, the driver may cache the answer and automatically block the file access next time, without asking the agent again. If the value is <i>False</i> that indicates the agent service answer should not be cached. Default value: <i>True</i>.
protectInstalledFiles	Boolean. Optional.	Valid only if policy action is Elevate and inheritable attribute value is <i>True</i> . If protectInstalledFiles value is <i>True</i> the agent should not allow non-elevated non-admin processes to modify or delete files created by the target process or its children. (Note: only files with supported extensions like exe, bat, dll etc. are protected). Default value: <i>False</i>
restrictFileDlg	Boolean. Optional.	Indicates whether File Open/Save common dialogs within the target process should run with restricted privileges. Applicable to Elevate and Elevate On-Demand policies only. Default value: <i>False</i>
minVersion	String. Optional.	Oldest exe file version allowed. If this attribute is missing the policy is applied without verifying min file version. File version is retrieved as "FileVersion" parameter from the executable file version block.
maxVersion	String. Optional.	Newest exe file version allowed. If this attribute is missing the policy is applied without verifying max file version. File version is retrieved as "FileVersion" parameter from the executable file version block.
minProductVersion	String. Optional.	Oldest product version allowed. If this attribute is missing the policy is applied without verifying min product version. Product version is retrieved as "ProductVersion" parameter from the executable file version block.
maxProductVersion	String. Optional.	Newest product version allowed. If this attribute is missing the policy is applied without verifying max product version. Product version is retrieved as "ProductVersion" parameter from the executable file version block.
token	GUID. Depends on policy action.	For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the target process. See <Token> element for details. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id. <i>Token attribute is valid only when the element is placed under <Targets>. When <Executable> element is placed under <ApplicationGroup> token attribute is not valid.</i>
softwareDistributorName	String. Depends on policy action.	Used only when <Executable> element is used as a target of SoftwareDistributors policy. In case of SoftwareDistributors policy this attribute is a must.
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

<Filename> Defines file name (without path) and optionally file hash. If this element is missing filename and hash are not used to identify policy target.

<Arguments> Defines command line arguments (if applicable). If this element is missing command line arguments are not used to identify policy target.

<Location> Defines file location. If this element is missing location is not used to identify policy target.

<Owner> Defines file owner. If this element is missing file owner is not used to identify policy target. There can be more than one <Owner> child elements. **Important:** The policy is applied to file if at least one Owner condition is met.

<Publisher> Defines file publisher (digital signature 'Subject' field). If this element is missing file publisher is not used to identify policy target. There can be more than one <Publisher> child elements. **Important:** The policy is applied to file if **at least one** Publisher condition is met.

<FileVerInfo> Defines particular file version information (e.g. ProductName, BuildNumber, etc). If this element is missing file version information is not used to identify policy target. There can be more than one <FileVerInfo> child elements. **Important:** The policy is applied to file only if **all** FileVerInfo conditions are met.

<SvcName> Defines Windows Service name. It can be used as a property of Executable target when it defines a Parent Process or Software Distributer.

This property can be verified only when the process is already running, so it cannot be used to elevate/block the process on start.

[<FileOrigin>](#) Defines the file installation source.

[<Parent>](#) Defines parent process. If this element is missing the parent process is not used to identify the policy target.

[<ParentIsNot>](#) Defines parent process negative condition. If parent process belongs to this group then the target does not match.

[<UserGroupList>](#) Parent element for a collection of **User** elements. Used when the [<Executable>](#) element describes Parent Process or Software Distributer.

Example:

```
<Executable inheritable="0" restrictFileDlg="1" token="{8ED5B74E-A259-4315-9810-EB795FBD4A98}" minVersion="1.2.3.4" maxVersion="2.3.4.5" mav="11.7.0.245">
  <FileName>helloworld.exe</FileName>
  <Location>%ProgramFiles%</Location>
  <Publisher/>
  <Publisher/>
  <FileVerInfo/>
  <FileVerInfo/>
  <Parent/>
  <ParentIsNot/>
</Executable>
```

<MacExecutable> element

[<MacExecutable>](#) element defines policy target.

It can represent single executable file or many files if defines location or publisher or uses wildcards in filename.

Path 1: [/Policies/Policy/Targets/MacExecutable](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/MacExecutable](#)

Attributes

targetId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
minBundleVersion	String Optional.	Oldest bundle version allowed. If this attribute is missing the policy is applied without verifying min bundle version.
maxBundleVersion	String Optional.	Newest bundle version allowed. If this attribute is missing the policy is applied without verifying max bundle version.
mav	String Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual. Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

[<Filename>](#) Defines file name (without path) and optionally file hash. If this element is missing filename and hash are not used to identify policy target.

[<Type>](#) Defines subtype of MacExecutable element. String value. Only "sudo" value is supported.

[<Arguments>](#) Defines command line arguments (if applicable). If this element is missing command line arguments are not used to identify policy target.

[<Location>](#) Defines file location. If this element is missing location is not used to identify policy target.

[<BundleID>](#) Bundle ID is a tool Apple uses to identify individual apps. . If this element is missing BundleID is not used to identify policy target.

[<Publisher>](#) Defines file publisher (digital signature). If this element is missing file publisher is not used to identify policy target. There can be more than one [<Publisher>](#) child elements. Important: The policy is applied to file if **at least one** Publisher condition is met.

Example:

```
<MacExecutable token="{8ED5B74E-A259-4315-9810-EB795FBD4A98}" minBundleVersion="1.2" maxBundleVersion="2.3" mav="11.7.1.2">
  <FileName>Notes.app</FileName>
  <Location>/Application</Location>
  <BundleID/>
```

```
<Publisher/>
</MacExecutable>
```

<AppPackage> element

<AppPackage> element defines policy target. It represents Windows Store (Windows RT) app package.

It can represent single app package or many app packages e.g. if defines only publisher or uses wildcards in parameter values.

Path 1: [/Policies/Policy/Targets/AppPackage](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/AppPackage](#)

Attributes

targetId	GUID Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
inheritable	Boolean. Optional.	If the value is <i>False</i> the policy rule is applied to the process that corresponds to the <AppPackage> element, but not applied to child processes. If the value is <i>True</i> the policy rule is also applied to the entire child processes hierarchy. Default value: False.
minVersion	String. Optional.	Oldest package version allowed. If this attribute is missing the policy is applied without verifying min package version. Package version is retrieved from PACKAGE_ID structure (not from the executable file version block).
maxVersion	String. Optional.	Newest package version allowed. If this attribute is missing the policy is applied without verifying max package version. Package version is retrieved from PACKAGE_ID structure (not from the executable file version block).
matchAllCapabilities	Boolean. Optional.	If the value is <i>False</i> the policy rule is applied to the package if at least one of the Capability or DeviceCapability conditions is met. If the value is <i>True</i> the policy rule is applied only if all Capability and DeviceCapability conditions are met. If <AppPackage> element contains neither <Capability> nor <DeviceCapability> children the attribute is ignored. Default value: False.
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

[<Location>](#) Defines package root location. If this element is missing location is not used to identify policy target.

[<Publisher>](#) Defines package publisher (digital signature). If this element is missing file publisher is not used to identify policy target. There can be more than one <Publisher> child elements. Important: The policy is applied to package if at least one Publisher condition is met.

[<AppPackageName>](#) Defines package name. If this element is missing package name is not used to identify policy target.

[<Capability>](#) Defines package capability. If this element is missing package capabilities are not used to identify policy target. There can be more than one <Capability> child elements. Important: See *matchAllCapabilities* attribute description.

[<DeviceCapability>](#) Defines package device capability. If this element is missing package device capabilities are not used to identify policy target. There can be more than one <DeviceCapability> child elements. Important: See *matchAllCapabilities* attribute description.

Example:

```
<AppPackage minVersion="1.2.3.4" maxVersion="2.3.4.5">
  <Location>%ProgramFiles%</Location>
  <Publisher/>
  <Publisher/>
  <AppPackageName/>
  <Capability/>
  <Capability/>
  <DeviceCapability/>
  <DeviceCapability/>
</Executable>
```

<Script> element

<Script> element defines policy target of type script.

It can represent single script or many script files if defines location or uses wildcards in filename.

Path 1: /Policies/Policy/Targets/Script

Path 2: /Policies/ApplicationGroups/ApplicationGroup/Script

Attributes

| | | |
|------------------------|------------------------------------|--|
| targetId | GUID.
Optional. | Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element on page). If the targetId attribute is missing Agent generates temporary target ID for internal use. |
| inheritable | Boolean.
Optional. | If the value is <i>False</i> the policy rule is applied to the script engine process that corresponds to the <Script> element, but not applied to child processes. If the value is <i>True</i> the policy rule is also applied to the entire child processes hierarchy. Applicable to Elevate and Elevate On-Demand policies only.
Default value: False. |
| cacheable | Boolean.
Optional. | If the value is <i>False</i> the policy match result is not cached in the driver. By default, if for instance the agent service returns BLOCK answer to the driver, the driver may cache the answer and automatically block the file access next time, without asking the agent again. If the value is <i>False</i> that indicates the agent service answer should not be cached.
Default value: True. |
| restrictFileDlg | Boolean.
Optional. | Indicates whether File Open/Save common dialogs within the target script engine process should run with restricted privileges. Applicable to Elevate and Elevate On-Demand policies only.
Default value: False |
| token | GUID.
Depends on policy action. | For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the target process. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id. <i>Token attribute is valid only when the element is placed under <Targets>. When <Script> element is placed under <ApplicationGroup> token attribute is not valid.</i> |
| major | String.
Optional. | Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>major</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>major</i> attribute value, the agent processes the policy target as usual.
Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual.
The attribute added in EPM version 11.7. |

Child elements

<Filename> Defines file name (without path) and optionally file hash. If this element is missing filename and hash are not used to identify policy target.

<Arguments> Defines command line arguments (if applicable). If this element is missing command line arguments are not used to identify policy target.

<Location> Defines file location. If this element is missing location is not used to identify policy target.

<Owner> Defines file owner. If this element is missing file owner is not used to identify policy target. There can be more than one <Owner> child elements. Important: The policy is applied to file if at least one Owner condition is met.

<EmbeddedScript> - Contains the content of the script to apply the policy rules to. If this element is present then other elements (FileName, Arguments, Location etc.) are invalid.

<FileOrigin> - Defines the file installation source.

<Parent> Defines parent process. If this element is missing the parent process is not used to identify policy target.

<ParentIsNot> Defines parent process negative condition. If parent process belongs to this group then the target does not match.

Examples:

```
<Script inheritable="0" restrictFileDlg="1" token="{8ED5B74E-A259-4315-9810-EB795FBD4A98}">
  <FileName>helloworld.exe</FileName>
  <Location>%ProgramFiles%</Location>
</Script>

<Script inheritable="1" restrictFileDlg="0">
  <EmbeddedScript>
    <ScriptName>myscript.bat</ScriptName>
    <ShortcutName>Shortcut Name</ShortcutName>
    <ScriptContent>
      <![CDATA[
        Pskill.exe notepad
        sc stop svc1
        exit 1
      ]]>
    </ScriptContent>
```

```
</EmbeddedScript>
</Script>
```

<MSI> element

<MSI> element defines policy target.

It can represent single MSI/MSP file or many files if defines location or publisher or uses wildcards in filename.

Path 1: /Policies/Policy/Targets/MSI

Path 2: /Policies/ApplicationGroups/ApplicationGroup/MSI

Attributes

| | | |
|-------------------|------------------------------------|---|
| targetId | GUID.
Optional. | Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use. |
| cacheable | Boolean.
Optional. | If the value is <i>False</i> the policy match result is not cached in the driver. By default, if for instance the agent service returns BLOCK answer to the driver, the driver may cache the answer and automatically block the file access next time, without asking the agent again. If the value is <i>False</i> that indicates the agent service answer should not be cached.
Default value: <i>True</i> . |
| minVersion | String.
Optional. | Oldest product file version allowed. If this attribute is missing the policy is applied without verifying min version. |
| maxVersion | String.
Optional. | Newest product file version allowed. If this attribute is missing the policy is applied without verifying max version. |
| token | GUID.
Depends on policy action. | For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the target process. See <Token> element for details. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id.
<i>Token attribute is valid only when the element is placed under <Targets>. When <MSI> element is placed under <ApplicationGroup> token attribute is not valid.</i> |
| mav | String.
Optional. | Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0".
If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target.
If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual.
Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual.
The attribute added in EPM version 11.7. |

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

[<Filename>](#) Defines file name (without path) and optionally file hash. If this element is missing filename and hash are not used to identify policy target.

[<Location>](#) Defines file location. If this element is missing location is not used to identify policy target.

[<Owner>](#) Defines file owner. If this element is missing file owner is not used to identify policy target. There can be more than one <Owner> child elements. Important: The policy is applied to file if at least one Owner condition is met.

[<Publisher>](#) Defines file publisher (digital signature 'Subject' field). If this element is missing file publisher is not used to identify policy target. There can be more than one <Publisher> child elements. Important: The policy is applied to file if **at least one** Publisher condition is met.

[<FileMsiInfo>](#) Defines particular MSI property. If this element is missing file version information is not used to identify policy target. There can be more than one <FileMsiInfo> child elements. Important: The policy is applied to file only if **all** FileMsiInfo conditions are met.

[<FileOrigin>](#) Defines the file installation source.

[<Parent>](#) Defines parent process. If this element is missing the parent process is not used to identify policy target.

[<ParentsNot>](#) Defines parent process negative condition. If parent process belongs to this group then the target does not match.

Example:

```
<MSI minVersion="1.2.3.4" maxVersion="2.3.4.5">
  <FileName>MySetup.msi</FileName>
  <Location>%Temp%</Location>
  <Publisher/>
  <FileMsiInfo/>
  <Parent/>
</MSI>
```

<MSU> element

<MSU> element defines policy target of type MSU (Microsoft Upgrade).
It can represent single MSU file or many files if defines location or uses wildcards in filename.

Path 1: /Policies/Policy/Targets/MSU

Path 2: /Policies/ApplicationGroups/ApplicationGroup/MSU

Attributes

targetId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
cacheable	Boolean. Optional.	If the value is <i>False</i> the policy match result is not cached in the driver. By default, if for instance the agent service returns BLOCK answer to the driver, the driver may cache the answer and automatically block the file access next time, without asking the agent again. If the value is <i>True</i> that indicates the agent service answer should not be cached. Default value: <i>True</i>.
token	GUID. Depends on policy action.	For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the target process. See <Token> element for details. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id. <i>Token attribute is valid only when the element is placed under <Targets>. When <MSU> element is placed under <ApplicationGroup> token attribute is not valid.</i>
major	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>major</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>major</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

<Filename> Defines file name (without path) and optionally file hash. If this element is missing filename and hash are not used to identify policy target.

<Location> Defines file location. If this element is missing location is not used to identify policy target.

<Owner> Defines file owner. If this element is missing file owner is not used to identify policy target. There can be more than one <Owner> child elements. Important: The policy is applied to file if at least one Owner condition is met.

<Publisher> Defines file publisher (digital signature 'Subject' field). If this element is missing file publisher is not used to identify policy target. There can be more than one <Publisher> child elements. Important: The policy is applied to file if **at least one** Publisher condition is met.

<FileOrigin> Defines the file installation source.

<Parent> Defines parent process. If this element is missing the parent process is not used to identify policy target.

<ParentIsNot> Defines parent process negative condition. If parent process belongs to this group then the target does not match.

Example:

```
<MSU>
  <FileName>Windows6.1-KB2616676-x86.msu</FileName>
  <Location>%Temp%</Location>
  <Publisher compareAs="prefix">Microsoft</Publisher>
</MSU>
```

<COM> element

<COM> element defines policy target of type elevated COM-object running out-of-process. See <http://msdn.microsoft.com/en-us/library/windows/desktop/ms679687.aspx> for details.

Path 1: /Policies/Policy/Targets/COM

Path 2: /Policies/ApplicationGroups/ApplicationGroup/COM

Attributes

targetId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.

cl sid	GUID. Optional.	COM object's CLSID.
n a me	String. Optional.	Display name (GUI only, not used for verification).
to ken	GUID. Depends on policy action.	For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the target process. See <Token> element for details. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id. <i>Token attribute is valid only when the element is placed under <Targets>. When <COM> element is placed under <ApplicationGroup> token attribute is not valid.</i>
m av	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

[<FileName>](#) Defines COM module file name (without path) and optionally file hash. If this element is missing filename and hash are not used to identify policy target.

[<Location>](#) Defines COM module file location. If this element is missing location is not used to identify policy target.

[<Owner>](#) Defines COM module file owner. If this element is missing file owner is not used to identify policy target.

[<Publisher>](#) Defines COM module file publisher (digital signature 'Subject' field). If this element is missing file publisher is not used to identify policy target. There can be more than one <Publisher> child elements.Important: The policy is applied to file if at least one Publisher condition is met.

Example:

```
<COM clsid="{9DF523B0-A6C0-4EA9-B5F1-F4565C3AC8B8}" name="Date and Time">
  <FileName>shell32.dll</FileName>
  <Location>%SystemRoot%\</Location>
  <Publisher compareAs="prefix">Microsoft</Publisher>
  <Owner>NT SERVICE\TrustedInstaller</Owner>
</COM/>
```

<AdminTask> element

<AdminTask> element defines a predefined administrative task as a target for elevation policy.

Path 1: [/Policies/Policy/Targets/AdminTask](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/AdminTask](#)

Attributes

ta rg et id	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
id	Number.	One of the EvfAdminTaskId values defined in VfAgentDeclarations.cs file.
to ken	GUID. Depends on policy action.	For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the target process. See <Token> element for details. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id. <i>Token attribute is valid only when the element is placed under <Targets>. When <AdminTask> element is placed under <ApplicationGroup> token attribute is not valid.</i>
m av	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual.

		Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.
--	--	---

Child elements

No child elements

Example:

```
<AdminTask id="9"/>
```

<MacAdminTask> element

<MacAdminTask> element defines a predefined MacOS administrative task as a target for elevation policy. It is applicable to on **MacOS only**.

Path 1: [/Policies/Policy/Targets/MacAdminTask](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/MacAdminTask](#)

Attributes

targetId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
id	Number.	One of the EvfMacAdminTaskId values defined in VfAgentDeclarations.cs file.
major	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>major</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>major</i> attribute value, the agent processes the policy target as usual. Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

targetId *Optional*. GUID. Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see [<DeletedTarget>](#) element on page). If the targetId attribute is missing Agent generates temporary target ID for internal use.

id Number.

Child elements

No child elements

Example:

```
<MacAdminTask id="9"/>
```

<URL> element

<URL> element can define Web Application URL that should be executed with elevated privileges (path 1 and 2 below).

<URL> element can define Code URL property of ActiveX installation target (path 3 and 4 below).

<URL> element can define Source URL where the file was downloaded from (path 5 and 6 below).

Path 1: [/Policies/Policy/Targets/URL](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/URL](#)

Path 3: [/Policies/Policy/Targets/ActiveXInstall/URL](#)

Path 4: [/Policies/ApplicationGroups/ApplicationGroup/ActiveXInstall/URL](#)

Path 5: [/Policies/Policy/Targets/TargetType/FileOrigin/URL](#)

Path 6: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/FileOrigin/URL](#)

Attributes

target	GUID.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends
---------------	-------	---

etld	Optional.	changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact, prefix, contains, wildcards, regexp</i> . Default value: <i>exact</i>
token	GUID. Depends on policy action.	For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the target process. See <Token> element for details. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id. <i>Token attribute is valid only when the element is placed under <Targets>. When <URL> element is placed under <ApplicationGroup> token attribute is not valid.</i>
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the mav attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the mav attribute value, the agent processes the policy target as usual. Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Child elements

No child elements.

Element text

The element text defines command line arguments.

Examples:

```
<URL compareAs="prefix">https://www.acme.com/</URL>
<URL compareAs="regexp">http.?://www.acme.com/./gridcontrol/.</URL>
```

<ActiveXInstall> element

<ActiveXInstall> element defines ActiveX controls allowed to be installed with elevated privileges.

Path 1: [/Policies/Policy/Targets/ActiveXInstall](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/ActiveXInstall](#)

Attributes

targetId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
minVersion	String. Optional.	Oldest ActiveX version allowed. If this attribute is missing the ActiveX installation is allowed without verifying min version.
maxVersion	String. Optional.	Newest ActiveX version allowed. If this attribute is missing the ActiveX installation is allowed without verifying max version.
clsid	GUID. Optional.	ActiveX control CLSID. If this attribute is missing the ActiveX installation is allowed without verifying CLSID.
token	GUID. Depends on policy action.	For policy types allowing usage of custom tokens this attribute indicates which token rules should be applied to the target process. See <Token> element for details. When this attribute is present, the XML should also include /Policies/Tokens/Token with the given id. <i>Token attribute is valid only when the element is placed under <Targets>. When <ActiveXInstall> element is placed under <ApplicationGroup> token attribute is not valid.</i>
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the mav attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the mav attribute value, the agent processes the policy target as usual.

Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

<Publisher> - Defines file publisher (digital signature). If this element is missing file publisher is not verified. There can be more than one <Publisher> child elements. **Important:** The policy is applied to ActiveX if at least one Publisher condition is met.

<URL> - ActiveX installation code URL. If this element is missing the ActiveX installation is allowed without verifying the code URL.

<FileName> - Name of the downloaded installation file. If this attribute is missing the ActiveX installation is allowed without verifying installation filename.

<MimeType> - MIME type. E.g. "application/x-shockwave-flash". If this attribute is missing the ActiveX installation is allowed without verifying MIME type.

Examples:

```
<!-- Policy that allows elevating all ActiveX installations -->
<Policy id="2041" name="Elevate All ActiveX installations" action="12">
  <Targets>
    <ActiveXInstall/>
  </Targets>
</Policy>

<!-- Policy that allows elevating very specific ActiveX installations -->
<Policy id="2042" name="Elevate very specific ActiveX installation" action="12">
  <Targets>
    <ActiveXInstall minVersion="1.2.3.4" maxVersion="2.3.4.5" clsid="{01234567-ABCD-1234-ABCD-0123456789AB}">
      <URL compareAs="prefix">https://www.acme.com/</URL>
      <Publisher compareAs="wildcards">Acme*</Publisher>
      <FileName>activex.cab</FileName>
      <MimeType>application/x-shockwave-flash</MimeType>
    </ActiveXInstall>
  </Targets>
</Policy>
```

<FSEntry> element

<FSEntry> element defines target file system entry (file or directory).

Path 1: /Policies/Policy/Targets/FSEntry

Path 2: /Policies/ApplicationGroups/ApplicationGroup/FSEntry

Note: The element can be added as a target only to a policy of type Set Security (action=11)

Attributes

targ etid	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
entryType	String.	Currently the possible values are "dir" and "file" . In the future this might be extended to more file system entry types.
accessMask	0x prefixed 32-bit hex integer.	E.g. "0x001FFFFFF". Specifies the mask of access rights to be allowed/denied depending on the allowAccess flag in the containing Set Security policy. See File Access Rights Constants for access rights for files and directories.
subfolders	Boolean. Optional.	If the value is True to policy is also applied to subfolders of the given folder. Applicable only when entryType is "dir" . Default value: False.
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual. Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Element text

Element text defines the file/dir path. No wildcards, no regular expressions. Only environment variables are supported.

Child elements

No child elements

Example:

```
<FSEntry entryType="dir" accessMask="0x001FFFFF">%ProgramFiles%\Adobe</FSEntry>
```

<RegKey> element

<RegKey> element defines target registry key.

Path 1: [/Policies/Policy/Targets/RegKey](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/RegKey](#)

Note: The element can be added as a target only to a policy of type Set Security (action=11)

Attributes

targetid	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
accessMask	0x prefixed 32-bit hex integer.	E.g. "0x001FFFFF". Specifies the mask of access rights to be allowed/denied depending on the allowAccess flag in the containing Set Security policy. See Registry Key Security and Access Rights for access rights for registry key objects.
subkeys	Boolean. Optional.	If the value is True to policy is also applied to subkeys of the given registry key. Default value: False.
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the mav attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the mav attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Element text

Registry key path. Format is the same as used by reg.exe command. Start the path with the appropriate subtree. The valid subtrees are **HKLM**, **HKCU**, **HKCR**, **HKU**, and **HKCC**. No wildcards, no regular expressions etc.

Child elements

No child elements

Example:

```
<RegKey accessMask="0x001F0ACF">HKLM\SOFTWARE\Microsoft\Fax</RegKey>
```

<Service> element

<Service> element defines target Windows Service.

Path 1: [/Policies/Policy/Targets/Service](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/Service](#)

Note: The element can be added as a target only to a policy of type Set Security (action=11)

Attributes

targ etId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
access Mask	0x prefixed 32-bit hex integer.	E.g. "0x000F01FF" which means SERVICE_ALL_ACCESS. Specifies the mask of access rights to be allowed/denied depending on the allowAccess flag in the containing Set Security policy. See Service Security and Access Rights for access rights for a service.
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Element text

No text.

Child elements

[<SvcName>](#) Optional. Defines service name.

<UsbDev> element

<UsbDev> element defines target USB device. Corresponds to VF_MEDIA_USB_DISK and VF_MEDIA_USB_VOLUME types returned by CvfRemovableMedia class.

Path 1: [/Policies/Policy/Targets/UsbDev](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/UsbDev](#)

Note: The element can be added as a target only to a policy of type Set Security (action=11) and only when **allowAccess** attribute is **False**.

Attributes

targ etId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
access Mask	0x prefixed 32-bit hex integer.	Possible values: 0x00000000 allow all access 0x10000000 Block All (GENERIC_ALL) 0xA0000000 Block Read and Execute (GENERIC_READ GENERIC_EXECUTE) 0x40000000 Block Write (GENERIC_WRITE) 0x20000000 Block Execute (GENERIC_EXECUTE) 0x60000000 Block Write and Execute (GENERIC_WRITE GENERIC_EXECUTE)
mav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Element text

No text.

Child elements

[<MedialInfo>](#) Defines particular USB device property. There can be more than one <MedialInfo> child elements. Important: The policy is applied to USB device only if all MedialInfo conditions are met.

Example:

```
<UsbDev accessMask="0xA0000000">
  <MediaInfo name="vendor" compareAs="prefix">SanDisk</MediaInfo>
  <MediaInfo name="instanceId">123456789</MediaInfo>
</UsbDev>
```

<OpticalDisc> element

<OpticalDisc> element defines target digital storage media such as CDs and DVDs. Corresponds to VF_MEDIA_USB_CD and VF_MEDIA_CD types returned by CvfRemovableMedia class.

Path 1: /Policies/Policy/Targets/OpticalDisc

Path 2: /Policies/ApplicationGroups/ApplicationGroup/OpticalDisc

Note: The element can be added as a target only to a policy of type Set Security (action=11) only when **allowAccess** attribute is **False**.

Attributes

targetId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
accessMask	0x prefixed 32-bit hex integer.	Possible values: 0x00000000 allow all access 0xA0000000 Block Read and Execute (GENERIC_READ GENERIC_EXECUTE) 0x20000000 Block Execute (GENERIC_EXECUTE) 0x10000000 Block All (GENERIC_ALL)
major	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>major</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>major</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Element text

No text.

Child elements

<MediaInfo> - Defines particular CD/DVD disc property. There can be more than one <MediaInfo> child elements. Important: The policy is applied to CD/DVD disc only if all MediaInfo conditions are met.

Note: Currently, the only property supported for OpticalDisc target is **InstanceId**.

Example:

```
<OpticalDisc accessMask="0xA0000000">
  <MediaInfo name="instanceId">123456789</MediaInfo>
</OpticalDisc>
```

<Exclude> element

<Exclude> target element defines target files/folders and/or users excluded by VF Agent when applying policies.

Note1: The element can be added as a target only to a policy of type EXCLUDE (action=12)

Note2: The element cannot be added to ApplicationGroup

Path: /Policies/Policy/Targets/Exclude

Attributes

targetId	GUID. Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
major	String. Optional	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0".

al.	If the current agent version is less than the version specified in the <i>max</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>max</i> attribute value, the agent processes the policy target as usual. Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.
-----	--

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

<FileName> - Defines file name (without path). If this element is missing filename is not used to identify the Exclude target. **Important:** When **<FileName>** element is a child of **<Exclude>** element it should **not** use **Hash** attribute.

<Location> - Defines file location. If this element is missing location is not used to identify policy target.

<UserGroupList> - Parent element for a collection of **User** elements. Used to define users excluded from elevation/block.

Examples:

```
<!--The example below affects all files in c:\Program Files\MyAntivirus folder when accessed by a member of Administrators group.-->
<!--It also excludes all processes started from c:\Program Files\MyAntivirus by a member of Administrators group-->
<Exclude>
  <Location>%ProgramFiles%\MyAntivirus</Location>
  <UserGroupList>
    <User SID="S-1-5-32-544">BUILTIN\Administrators</User>
  </UserGroupList>
</Exclude>
<!--The example below affects all files accessed by and processes when executed by Local System-->
<Exclude>
  <UserGroupList>
    <User SID="S-1-5-18">NT AUTHORITY\SYSTEM</User>
  </UserGroupList>
</Exclude>
<!--The example below affects notepad.exe file accessed or started by any user.-->
<Exclude>
  <FileName>notepad.exe</FileName>
</Exclude>
```

<Dll> element

<Dll> element defines policy target.

It can represent single dll file or many files if defines location or publisher or uses wildcards in filename.

Path 1: [/Policies/Policy/Targets/Dll](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/Dll](#)

Attributes

targetId	GUID Optional.	Defines unique target ID. Can identify target in Policy Audit events. Also target ID is used to delete a target when server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetId attribute is missing Agent generates temporary target ID for internal use.
cacheable	Boolean. Optional.	If the value is <i>False</i> the policy match result is not cached in the driver. By default, if for instance the agent service returns BLOCK answer to the driver, the driver may cache the answer and automatically block the file access next time, without asking the agent again. If the value is <i>False</i> that indicates the agent service answer should not be cached. Default value: True.
minVersion	String. Optional.	Oldest DLL file version allowed. If this attribute is missing the policy is applied without verifying min file version. File version is retrieved as "FileVersion" parameter from the DLL file version block.
maxVersion	String. Optional.	Newest DLL file version allowed. If this attribute is missing the policy is applied without verifying max file version. File version is retrieved as "FileVersion" parameter from the DLL file version block.
minPr	String	Oldest product version allowed. If this attribute is missing the policy is applied without verifying min product version. Product version is

productVersion	g. Optional.	retrieved as "ProductVersion" parameter from the DLL file version block.
maxProductVersion	String. Optional.	Newest product version allowed. If this attribute is missing the policy is applied without verifying max product version. Product version is retrieved as "ProductVersion" parameter from the D:: file version block.
minAgentVersion	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33", "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>minAgentVersion</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>minAgentVersion</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual. The attribute added in EPM version 11.7.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

<FileName> Defines file name (without path) and optionally file hash. If this element is missing filename and hash are not used to identify policy target.

<Location> Defines file location. If this element is missing location is not used to identify policy target.

<Owner> Defines file owner. If this element is missing file owner is not used to identify policy target. There can be more than one <Owner> child elements. **Important:** The policy is applied to file if at least one Owner condition is met.

<Publisher> Defines file publisher (digital signature 'Subject' field). If this element is missing file publisher is not used to identify policy target. There can be more than one <Publisher> child elements. **Important:** The policy is applied to file if at least one Publisher condition is met.

<FileVersionInfo> Defines particular file version information (e.g. ProductName, BuildNumber, etc). If this element is missing file version information is not used to identify policy target. There can be more than one <FileVersionInfo> child elements. **Important:** The policy is applied to file only if all FileVerInfo conditions are met.

<FileOrigin> - Defines the file installation source.

<Parent> - Defines caller process and its ancestors. Supported for DLL targets since version 11.7.

<ParentIsNot> Defines parent process negative condition. If parent process belongs to this group then the target does not match.

Example:

```
<Dll minVersion="1.2.3.4" maxVersion="2.3.4.5">
  <FileName>aha.dll</FileName>
  <Location>%ProgramFiles%</Location>
  <Publisher/>
  <Publisher/>
  <FileVersionInfo/>
  <FileVersionInfo/>
</Dll>
```

<DeletedTarget> element

<DeletedTarget> element defines a target deleted from the ApplicationGroup since the last update. Not valid in GPO mode. Valid only if the parent **<ApplicationGroup>** element has **merge** attribute value **True**.

Path: [/Policies/ApplicationGroups/ApplicationGroup/DeletedTarget](#)

Attributes

targetId	GUID.	Defines target ID of the target to be deleted from the ApplicationGroup. See targetId attribute at target elements.
-----------------	-------	--

Element text

None.

Child elements

No child elements

Example:

```
<DeletedTarget targetId="{21CB1018-8815-443D-BDB0-40754698DD37}" />
```

<FileName> element

<FileName> element defines policy target file name without path and optionally file hash.

Path 1: [/Policies/Policy/Targets/TargetType/FileName](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/FileName](#)

Where *TargetType* can be Executable, Script, MSI, MSU, Dll

Attributes

useExtOnly	Boolean. Optional.	If useExtOnly attribute is True then - the filename is ignored and only file extension is compared. Usually used to match file by Hash only and check only files with relevant extension. compareAs attribute is ignored. Default value: <i>False</i>.
compareAs	String. Optional.	Defines how the agent should compare the actual filename value with the expected filename value. Possible values: <i>exact</i>, <i>prefix</i>, <i>contains</i>, <i>wildcards</i>, <i>regexp</i>. Default value: <i>wildcards</i> Note: Filename comparison on Windows is always case insensitive Note: If useExtOnly attribute is True compareAs attribute is ignored
caseSensitive	Boolean. Optional.	Filename comparison on Windows is always case insensitive. ? MacOS ? Default value: <i>False</i>.
hash	String. Depends on hashAlgorithm attribute presence.	File hash value. This attribute is valid only if hashAlgorithm attribute is present.
hashAlgorithm	String. Depends on hash attribute presence.	Id of the algorithm used to calculate the hash. This attribute is valid only if hash attribute is present. Supported values: "ZLIB:CRC32", "MD5", "SHA1", "SHA256", "PEHASH:SHA256", "AUTHENTHASH" <u>Note:</u> If hash and hashAlgorithm attributes do not exist in the FileName element, then hash is not used to identify policy target files.
fileSize	Number. Optional.	Defines file size value, in bytes.

Child elements

No child elements.

Element text

The element text defines the file name without path. The name can contain '*' and '?' wildcards.

Examples:

```
<FileName hash="867B54F1BC5B71045A9A00BACA485A24176B202C" hashAlgorithm="SHA1">notepad.exe</FileName>
<FileName>Setup.msi</FileName>
```

<Arguments> element

<Arguments> element defines command line arguments passed to the target process.

Path 1: [/Policies/Policy/Targets/TargetType/Arguments](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/Arguments](#)

Where *TargetType* can be Executable, Script

Attributes

compareAs	String.	
------------------	---------	--

	Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regexp</i> . Default value: <i>exact</i>
caseSensitive	Boolean. Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: True.

Child elements

No child elements.

Element text

The element text defines command line arguments.

Examples:

```
<Arguments caseSensitive="False">-s t 0</Arguments>
<Arguments compareAs="wildcards">/i {*}</Arguments>
```

<Location> element

<Location> element defines policy target location without file name (Path 1 and 2) or source location (Path 3 and 4).

- Path 1:** [/Policies/Policy/Targets/TargetType/Location](#)
Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/Location](#)
Path 3: [/Policies/Policy/Targets/TargetType/FileOrigin/Location](#)
Path 4: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/FileOrigin/Location](#)
Where *TargetType* can be Executable, Script, MSI, MSU, Dll

Attributes

subfolders	Boolean. Optional.	If True location includes subfolders. Otherwise it includes the specified folder only. Default value: True.												
locationType	String. Optional.	Represents a comma-separated list of drive types covered by the element. Substrings are case insensitive. E.g. "FIXED, CDROM" means hard-drives and CD/DVD drives. Default value: "ANY". Possible substrings: <table><tr><td>ANY</td><td>Any location type (default)</td></tr><tr><td>REMOVABLE</td><td>The drive has removable media; for example, a floppy drive, thumb drive, or flash card reader.</td></tr><tr><td>FIXED</td><td>The drive has fixed media; for example, a hard disk drive or flash drive.</td></tr><tr><td>REMOTE</td><td>The drive is a remote (network) drive.</td></tr><tr><td>CDROM</td><td>The drive is a CD-ROM drive.</td></tr><tr><td>RAMDISK</td><td>The drive is a RAM disk.</td></tr></table> See also GetDriveType API description.	ANY	Any location type (default)	REMOVABLE	The drive has removable media; for example, a floppy drive, thumb drive, or flash card reader.	FIXED	The drive has fixed media; for example, a hard disk drive or flash drive.	REMOTE	The drive is a remote (network) drive.	CDROM	The drive is a CD-ROM drive.	RAMDISK	The drive is a RAM disk.
ANY	Any location type (default)													
REMOVABLE	The drive has removable media; for example, a floppy drive, thumb drive, or flash card reader.													
FIXED	The drive has fixed media; for example, a hard disk drive or flash drive.													
REMOTE	The drive is a remote (network) drive.													
CDROM	The drive is a CD-ROM drive.													
RAMDISK	The drive is a RAM disk.													

Child elements

No child elements.

Element text

The element text defines file location (path without name). The location can contain '*' and '?' wildcards and "system scope" environment variables.

Examples:


```

<!--Any location under Program Files folder-->
<Location>%ProgramFiles%</Location>
<!--Wildcards-->
<Location>C:\Dir1*\Dir?</Location>
<!--C:\Dir folder only without subfolders-->
<Location subfolders="False">C:\Dir1</Location>
<!--Any location at fixed local hard-drive-->
<Location locationType="FIXED">*</Location>

```

<Owner> element

Defines file owner.

Path 1: [/Policies/Policy/Targets/TargetType/Owner](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/Owner](#)

Where *TargetType* can be Executable, Script, MSI, MSU, Dll

Attributes

SID	String. Optional.	Defines the account SID. Default value: if SID attribute is missing or its value is empty the account name (see Element Text below) is used to resolve the account.
------------	----------------------	---

Child elements

No child elements

Element Text

The element text defines account name in DOMAIN\Name format. If SID attribute is present and non-empty then the account name is used for visualization only. Otherwise the name is used to resolve the account SID.

Following name formats are supported:

DOMAIN\Name - for domain accounts

.\Name, *BUILTIN\Name*, *ComputerName\Name* for local and built-in accounts.

Examples:

```

<Owner SID="S-1-5-18">.\Administrators</Owner>
<Owner>DOM\UserName</Owner>

```

<BundleID> element

Bundle ID is a tool Apple uses to identify individual apps.

Path 1: [/Policies/Policy/Targets/MacExecutable/BundleID](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/MacExecutable/BundleID](#)

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regex</i> . Default value: <i>prefix</i>
caseSensitive	Boolean. Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: False .

Child elements

No child elements.

Element text

```
<BundleID compareAs="regex">com.[Apple|apple]</BundleID>
<BundleID compareAs="wildcards" caseSensitive="True">com.apple.*</BundleID>
<BundleID/>
<!--Last example means: any BundleID-->
```

<Publisher> element

Defines file publisher (digital signature 'Subject' field)

Path 1: */Policies/Policy/Targets/TargetType/Publisher*

Path 2: */Policies/ApplicationGroups/ApplicationGroup/TargetType/Publisher*

Path 3: */.../FileOrigin/Package/Publisher*

Where *TargetType* can be Executable, DLL, Script, MSI, MSU, ActiveXInstall. Parent element can contain multiple Publisher children. In this case Publisher conditions are combined using OR operator.

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regex</i> . Default value: <i>prefix</i>
caseSensitive	Boolean. Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: False .
void	Boolean. Optional.	This attribute means that there is no publisher (file is not signed). Note: If void attribute is present: (1) its value must be <i>True</i> , (2) no other attributes are allowed, (3) the element text should be empty

Child elements

No child elements.

Element text

```
<Publisher compareAs="regex">Micr.soft [Corp|Corpration]</FileName>
<Publisher compareAs="wildcards" caseSensitive="True">ACM?</Publisher>
<!--Next example means: No publisher (file not signed)-->
<Publisher void="True"/>
<!--Next example means: signed by any publisher-->
<Publisher/>
```

<RequestedAccess> element

Used in OnFileOpen callback and defines the requestedAccess (or desiredAccess) parameter passed to the CreateFile API. See [File Access Rights Constants](#).

Path 1: */Policies/Policy/Targets/Dll/RequestedAccess*

Path 2: */Policies/ApplicationGroups/ApplicationGroup/Dll/RequestedAccess*

Attributes

compareAs	String.	Defines how the agent should compare the actual <i>desiredAccess</i> value with the provided <i>bitmask</i> value. Possible values: <i>Exact</i> – the actual <i>desiredAccess</i> value must be equal to the bitmask value <i>ContainsAll</i> - the actual <i>desiredAccess</i> value must contain all the bits from the bitmask value <i>ContainsAny</i> - the actual <i>desiredAccess</i> value must contain at least one bit from the bitmask value <i>ContainsNone</i> - the actual <i>desiredAccess</i> value must contain none of the bits from the bitmask value
bitmask	<i>0x</i> -prefixed 32-bit hex number.	The bitmask to be applied to the actual <i>desiredAccess</i> value. See File Access Rights Constants .

Child elements

No child elements.

Element text

No element text

Example:

```
<!--The example below defines a DLL file being accessed with any rights except FILE_EXECUTE.-->
<!--Bitmask 0x20 means FILE_EXECUTE and compareAs="ContainsNone" means any bits except specified by the mask.-->
<Dll>
  <FileName>*.dll</FileName>
  <!--0x20 = FILE_EXECUTE-->
  <RequestedAccess bitmask="0x20" compareAs="ContainsNone"/>
</Dll>
```

<MimeType> element

<MimeType> element defines Mime Type to the target ActiveX Installation.

Path 1: [/Policies/Policy/Targets/ActiveXInstall/MimeType](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/ActiveXInstall/MimeType](#)

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regexp</i> . Default value: <i>exact</i>
------------------	----------------------	--

Child elements

No child elements.

Element text

The element text defines Mime Type value.

Example:

```
<MimeType compareAs="wildcards">application/x-shock?ave-flash</MimeType>
```

<AppPackageName> element

<AppPackageName> element defines Windows Store (Windows RT) app package name(e.g. *Microsoft.Maps*)

Path 1: [/Policies/Policy/Targets/AppPackage/AppPackageName](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/AppPackage/AppPackageName](#)

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regexp</i> . Default value: <i>exact</i>
caseSensitive	Boolean. Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: <i>False</i> .

Child elements

No child elements.

Element text

The element text defines Package Name value.

Examples:

```
<AppPackageName compareAs="prefix">Microsoft.</AppPackage>
```

<Capability> element

Defines app package capability.

Path 1: [/Policies/Policy/Targets/AppPackage/Capability](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/AppPackage/Capability](#)

Attributes

name	String. Not case sensitive.	Capability name. Following are predefined names: <i>internetClient</i> , <i>internetClientServer</i> , <i>privateNetworkClientServer</i> , <i>documentsLibrary</i> , <i>picturesLibrary</i> , <i>videosLibrary</i> , <i>musicLibrary</i> , <i>enterpriseAuthentication</i> , <i>sharedUserCertificates</i> , <i>removableStorage</i> . See https://docs.microsoft.com/en-us/uwp/schemas/appxpackage/appxmanifestschema/element-capability
enabled	Boolean.	<i>True</i> means the app package requires the capability. <i>False</i> means the app package doesn't require the capability.

Child elements

No child elements.

Element text

No element text.

Example:

```
<Capability name="removableStorage" enabled="True"/>
```

<DeviceCapability> element

Defines app package device capability.

Path 1: [/Policies/Policy/Targets/AppPackage/DeviceCapability](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/AppPackage/DeviceCapability](#)

Attributes

name	String. Not case sensitive.	Device Capability name or GUID. Following names are supported by the agent: <i>location</i> , <i>microphone</i> , <i>proximity</i> , <i>webcam</i> . Alternatively any GUID in the {xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx} form can be used. See https://docs.microsoft.com/en-us/uwp/schemas/appxpackage/appxmanifestschema/element-devicecapability
enabled	Boolean.	<i>True</i> means the app package requires the device capability. <i>False</i> means the app package doesn't require the device capability.

name String (not case sensitive). Device Capability name or GUID. Following names are supported by the agent: *location*, *microphone*, *proximity*, *webcam*. Alternatively any GUID in the {xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx} form can be used. See <http://msdn.microsoft.com/en-us/library/windows/apps/br211430.aspx> for further details.

enabled Boolean. Value meaning: True app package requires the device capability. False app package doesn't require the device capability.

Child elements

No child elements.

Element text

No element text.

Example:

```
<DeviceCapability name="microphone" enabled="True"/>
<DeviceCapability name="{21157C1F-2651-4CC1-90CA-1F28B02263F6}" enabled="True"/>
```

<FileVerInfo> element

Defines an entry in the file version information.

Path 1: [/Policies/Policy/Targets/TargetType/FileVerInfo](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/FileVerInfo](#)

Where *TargetType* can be Executable, Dll

Attributes

name	String.	Defines the name of the version information to be verified. Agent passes this name to VerQueryValue API in order to retrieve corresponding value from the file version information. The following are predefined names: Comments , InternalName , ProductName , CompanyName , LegalCopyright , ProductVersion , FileDescription , LegalTrademarks , PrivateBuild , OriginalFilename , SpecialBuild
compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: exact , prefix , contains , wildcards , regex . Default value: exact
caseSensitive	Boolean. Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: False .

Child elements

No child elements.

Element text

The element text is the expected value for the file version info.

Example:

```
<FileVerInfo name="CompanyName" compareAs="regex">View.* [3-4]\.\\d</FileVerInfo>
```

<FileMsiInfo> element

Defines an MSI database property.

Path 1: [/Policies/Policy/Targets/MSI/FileMsiInfo](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/MSI/FileMsiInfo](#)

Attributes

name	String.	Defines MSI property name. Agent passes this name to MsiGetProperty API in order to retrieve corresponding value from the file version information. See the following link for predefined property names: https://docs.microsoft.com/en-us/windows/win32/msi/property-reference
comp	String.	

areAs	Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regexp</i> . Default value: exact
caseSensitive	Boolean. Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: False.

Child elements

No child elements.

Element text

The element text is the expected MSI property value.

Example:

```
<FileMsiInfo name="ProductName" compareAs="prefix">WinZip</FileMsiInfo>
```

<SvcName> element

SvcName defines Windows Service name. It can be used as a property of Executable target when it defines a Parent Process or Software Distributer. This property can be verified only when the process is already running, so it cannot be used to elevate/block the process on start.

Path 1: [/Policies/Policy/Targets/Executable/SvcName](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/Executable/SvcName](#)

Attributes

No attributes.

Child elements

No child elements.

Element text

The element text is the service name.

Example:

```
<!--The example below can be used to identify SCCM client service process-->
<SvcName>CcmExec</SvcName>
```

<MediaInfo> element

Defines an USB device property or CD/DVD disc property. Used with **UsbDev** and **OpticalDisc** targets.

Path 1: [/Policies/Policy/Targets/TargetName/MediaInfo](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetName/MediaInfo](#)

Attributes

name	String.	Defines the name of the property to be verified. The following are predefined names: <i>vendorId</i> , <i>productId</i> , <i>vendor</i> , <i>product</i> , <i>instanceId</i>
compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regexp</i> . Default value: exact
caseSensi	Boolean.	

tive	Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: False.
------	-----------	--

Child elements

No child elements.

Element text

The element text contains the expected value for the USB device or OpticalDisc property.

Example:

```
<MediaInfo name="Vendor">SunDisk</MediaInfo>
```

<FileOrigin> element

<FileOrigin> element defines where the file came from. It includes source location, distribution service (GpSvc, SCCM, etc.). It is applicable to Executable, MSI, MSU and other targets representing a single file. Not applicable to "no-file" targets like AdminTask. For more information about File Origin see [File Origin \(Source and Pre-history\) Algorithm \(Windows\)](#) page.

Path 1: /Policies/Policy/Targets/TargetType/FileOrigin

Path 2: /Policies/ApplicationGroups/ApplicationGroup/TargetType/FileOrigin

Attributes

preexisted	Boolean. Optional.	Defines if the file existed on disk before VF Agent installation. If this attribute is present and its value is True all other parameters (Location, UserGroupList, DistributionService) should not exist. Default value: False
mainSrcType	String. Optional.	Defines main parent type (e.g. <i>Internet</i> , <i>SoftwareDistributor</i> etc.). For possible values, see srcTypes attribute values in the File Origin XML Format document.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

[<Location>](#) Defines installation package source location. If this element is missing location is not used to identify file source.

[<UserGroupList>](#) Parent element for a collection of **User** elements. Used to validate user who installed the file.

[<DistributionService>](#) Defines Software Distribution service used to install the file.

[<Package>](#) Defines installation package.

[<Process>](#) - Defines the "spawner" process.

[<URL>](#) Defines Source URL.

Examples:

```
<FileOrigin preexisted="true"/>
<!-- OR -->
<FileOrigin>
  <DistributionService type="GroupPolicy" />
  <Location>\\server\share</Location>
  <UserGroupList>
    <User SID="S-1-5-18">.\Administrators</User>
    <User>DOM\UserName</User>
  </UserGroupList>
  <URL>https://live.sysinternals.com/Clockres.exe</URL>
</FileOrigin>
```

<DistributionService> element

<DistributionService> element defines Software Distribution service used to install the file (GroupPolicy, SCCM, etc). It is applicable to Executable, MSI, MSU and other targets representing a single file. Not applicable to "no-file" targets like AdminTask.

Path 1: /Policies/Policy/Targets/TargetType/FileOrigin/DistributionService
Path 2: /Policies/ApplicationGroups/ApplicationGroup/TargetType/FileOrigin/DistributionService

Attributes

type	String.	Defines which Software Distributor service used to install the file. E.g.: " <i>GroupPolicy</i> ", " <i>SCCM</i> "
------	---------	--

Child elements

No child elements

Example:

```
<FileOrigin>
  <DistributionService type="GroupPolicy" />
</FileOrigin>
```

<Package> element

<Package> element is used as FileOrigin sub-element and defines an installation package.

Path 1: /Policies/Policy/Targets/TargetType/FileOrigin/Package
Path 2: /Policies/ApplicationGroups/ApplicationGroup/TargetType/FileOrigin/Package

Attributes

type	String. Optional.	Defines package type. Possible values: " <i>EXE</i> ", " <i>MSI</i> "
equalsCallersPackage	Boolean. Optional.	From EPM version 11.5. The attribute allows matching of the installation package of a file (usually a DLL) with the installation package of the process that is accessing the file. E.g. you can use <i>equalsCallersPackage="true"</i> to allow a process to load a DLL if both the process and the DLL were installed from the same package. Alternatively, you can use <i>equalsCallersPackage="false"</i> to block DLL access to processes installed from different packages. Possible values: <i>True</i> – the installation package of the process accessing the file must be equal to the installation package of the accessed file. <i>False</i> - the installation package of the process accessing the file must be different to the installation package of the accessed file. Default value: If the <i>equalsCallersPackage</i> attribute is missing the installation package is not matched with the caller's process installation package.

Child elements

All child elements are optional. If particular child element is missing corresponding policy parameter is not verified.

<FileName> Defines file name (without path) and optionally file hash. If this element is missing filename and hash are not used to identify the installation package.
<Publisher> Defines file publisher (digital signature). If this element is missing file publisher is not used to identify the installation package. There can be more than one <Publisher> child elements. Important: The policy is applied if at least one Publisher condition is met.

Example:

```
<FileOrigin>
  <Package type="EXE">
    <FileName hash="2BF60F61" hashAlgorithm="ZLIB: CRC32">dotNetFx40.exe</FileName>
  </Package>
</FileOrigin>

<!-- Or -->

<FileOrigin>
  <Package type="EXE">
    <Publisher compareAs="prefix">Sophos</Publisher>
  </Package>
</FileOrigin>
```



```
<!-- Or -->

<FileOrigin>
  <Package equalsCallersPackage ="true" />
</FileOrigin>
```

<Process> element

From EPM version 11.5. <Process> element is used as FileOrigin sub-element and defines an *spawner* process.

Note: By "spawner" process we mean the process that created (or modified) the file. The information about the spawner process is saved in the FileOrigin. The information includes the executable file hash.

Path 1: /Policies/Policy/Targets/TargetType/FileOrigin/Process

Path 2: /Policies/ApplicationGroups/ApplicationGroup/TargetType/FileOrigin/Process

Attributes

isCaller	Boolean	<i>isCaller</i> attribute allows matching of the spawner process that created a file (usually a DLL) with the process that is accessing the file. If SHA1 of the spawner process image is equal to SHA1 of the calling process we assume <i>isCaller</i> is true. E.g. you can use <i>isCaller="true"</i> to allow a process to load a DLL if the DLL was created by the same executable. Alternatively, you can use <i>isCaller="false"</i> to block DLL access to all processes except the one that installed the DLL. Possible values: <i>True</i> - the process accessing the file must be the same process that created (modified) the accessed file. <i>False</i> - the process accessing the file must be NOT the same process that created (modified) the accessed file.
allAncestors	Boolean. Optional.	If allAncestors attribute value is True all the calling process can be matched not only with the spawner process itself but also with any parent of the spanner process saved in the FileOrigin. Default value: False.

Example:

```
<FileOrigin>
  <Process isCaller ="true" />
</FileOrigin>
```

<EmbeddedScript> element

<EmbeddedScript> element contains script representing policy action (for computer policies), policy target (for application policies) or policy condition. The element contains the actual script content to be executed on the target machine.

Path 1: /Policies/Policy/EmbeddedScript (*for VF_POLICY_RUN_SCRIPT only*)

Path 2: /Policies/Policy/Targets/Script/EmbeddedScript

Path 3: /Policies/Policy/Condition

Attributes

No attributes.

Child elements

<ScriptName> Defines original script name on server. It is used only to identify the script type by file extension. See example below.

<ShortcutName> *Optional.* When policy requires creating a shortcut to the embedded script on the target machine this element defines the script shortcut name on the target machine. See example below.

<ScriptContent> Contains CDATA section script content to be executed on the target machine. See example below. Attention: if attribute "base64"="True" is present, CDATA should be base64-encoded!

Example:

```

<EmbeddedScript>
  <ScriptName>myscript.bat</ScriptName>
  <ShortcutName>Shortcut Name</ShortcutName>
  <ScriptContent>
    <![CDATA[
      Pskill.exe notepad
      sc stop svc1
      exit 1
    ]]>
  </ScriptContent>
</Executable>

```

<Parent> element

Note: <Parent> element added after GPO 4.0 release (after build 4.0.1.523)

<Parent> element defines parent process condition.

Path 1: [/Policies/Policy/Targets/TargetType/Parent](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/Parent](#)

Applicable target types are: [Executable](#), [MSI](#), [MSU](#), [Script](#), [DLL](#)

For [Executable](#), [MSI](#), [MSU](#), and [Script](#) targets the Parent element defines the **parent** process (and optionally its ancestors depending on the allAncestors attribute value)

For [DLL](#) target the Parent element defines the **caller** process (and optionally its ancestors depending on the allAncestors attribute value). For [DLL](#) target the <Parent> element is supported since version 11.7

Attributes

appGroup	GUID	Defines application groups id, the parent process must belong to. The attribute value must be a valid application group id.
allAncestors	Boolean. Optional.	If True all ancestor processes are checked. Otherwise only direct parent is checked. Default value: False.

Child elements

No child elements.

Example:

```
<Parent appGroup="{4410D523-E950-4403-BA73-A826254C4C4F}" allAncestors="True"/>
```

<ParentIsNot> element

Note: <ParentIsNot> element added in the EPM Agent version 21.02 release (after build 21.02.0.431)

<ParentIsNot> element defines parent process negative condition - if the parent process belongs to the group specified in the <ParentIsNot> element, then the target is not matched.

Path 1: [/Policies/Policy/Targets/TargetType/ParentIsNot](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/ParentIsNot](#)

Applicable target types are: [Executable](#), [MSI](#), [MSU](#), [Script](#), [DLL](#)

For [Executable](#), [MSI](#), [MSU](#), and [Script](#) targets the ParentIsNot element defines a negative condition for the **parent** process (and optionally its ancestors depending on the allAncestors attribute value)

For [DLL](#) target the ParentIsNot element defines a negative condition the **caller** process (and optionally its ancestors depending on the allAncestors attribute value).

Attributes

appGroup	GUID	Defines application groups id, If the parent process belongs to this group then the target does not match. The attribute value must be a valid application group id.
allAncestors	Boolean. Optional.	If True all ancestor processes are checked. Otherwise only direct parent is checked. Default value: False.

Child elements

No child elements.

Example:

```
<ParentIsNot appGroup="{4410D524-E950-4403-BA73-A826254C4C4F}" allAncestors="True"/>
```

<Configuration> element

<Configuration> element contains agent configuration parameters (previously saved in conf.xml file. This element is applicable to policy action 10 (VFPA_CONFIGURATION) only.

Path 1: [/Policies/Policy/Configuration](#) (for VFPA_CONFIGURATION only)

Attributes

No attributes.

Child elements

Configuration parameters.

Example:

```
<Policy action="10">
  <Configuration>
    <Connection>
      <DisconnectTimeout>300</DisconnectTimeout>
    </Connection>
  </Configuration>
  <Messages>
    <Message id="VF_SHELL_ELEVATE_MENU_TEXT">Run with Elevated Privileges</Message>
  </Messages>
  <Alert>...</Alert>
</Policy>
```

<Messages> element

<Message> element contains agent custom messages (previously saved in customMsg.xml file. This element is applicable to policy action 10 (VFPA_CONFIGURATION) only.

Path 1: [/Policies/Policy/Messages](#) (for VFPA_CONFIGURATION only)

Attributes

No attributes.

Child elements

Customized messages.

Message Id	Default
VF_SF_FOLDER_NAME	Viewfinity Control Panel
VF_SHELL_ELEVATE_MENU_TEXT	Run with Elevated Privileges

Example:

```

<Policy action="10">
  <Configuration>
    <Connection>
      <DisconnectTimeout>300</DisconnectTimeout>
    </Connection>
  </Configuration>
  <Messages>
    <Message id="VF_SHELL_ELEVATE_MENU_TEXT">Run with Elevated Privileges</Message>
  </Messages>
  <Alert>...</Alert>
</Policy>

```

EvfPolicyAction values

See the most updated version in ...\\Manager\\VfAgentWService\\VfAgentDeclarations.cs

Value	Name	Description	Applicable Child elements
0	Invalid	Reserved. Should not be used in policies XML	
1	Normal Run	Allows/Forces normal execution of the target applications (e.g. if there is a block/elevate policy with lower precedence).	Scheduler, Condition, Targets, UserGroupList, Alert
2	Block	Blocks target application, task etc.	Scheduler, Condition, Targets, Alert
3	Elevate	Changes privileges of the target application based on the specified token rules.	Scheduler, Condition, Targets, UserGroupList, Alert
4	Elevate On Demand	Same as previous but user may be asked for justification, password, etc. before privileges are elevated.	Scheduler, Condition, Targets, UserGroupList, Alert
5	Collect UAC usage	Instructs agent to send UAC usage statistics	Scheduler, Condition, UserGroupList
6	Collect Policy Automation	Collect Policy Automation events	Scheduler, Condition, Targets, UserGroupList, Alert
7	Log Off	Log-Off user	Scheduler, Condition, UserGroupList, Alert
8	Computer Action	Shutdown/Restart/Hibernate computer	Scheduler, Condition, Alert
9	Run Script	Run the embedded script	EmbeddedScript, Scheduler, Condition
10	Configuration	Container for configuration parameters and common local GUI	Scheduler, Condition, UserGroupList, Configuration, Alert
11	Set Security	Modify access on file system or registry objects	Scheduler, Condition, Targets, UserGroupList
12	Exclude	Do not apply any policies to the targets of this policy.	Targets
13	Software Distributors	Contains definitions of Software Distributors	Targets
14	Restricted Run	Obsolete. Not in use.	
15	Eagles Policy		
16	Eagles Policy Global		
17	LCD	Password rotation for Loosely Connected Devices	
18	Multifile Creator	Contains definitions of Multifile Creators	Targets
19	Exclude for MacOS	Do not apply any policies to the targets of this policy.	Targets
20	AddToLocalGroup	Add users specified by <UserGroupList> to local groups specified by <TargetLocalGroups>.	UserGroupList, TargetLocalGroups, Alert

GUI variables

The follow variables can be used in HTML dialogs and balloon messages. Some variables may be unavailable depending on scenario and target type (see below).

Name	Description	OS

VF_COMPUTERNAME	NetBIOS name of the local computer	
VF_USER	Username in <i>domain\user</i> form	
VF_USER_DISPLAYNAME	A "friendly" display name (for example, <i>Jeff Smith</i>)	
VF_AGENT_VERSION	Viewfinity Agent product version (e.g. <i>4.0.234.1</i>). From vf_util.dll version info.	
VF_AGENT_PRODUCTNAME	<i>Viewfinity 3.8</i> string from version info	
VF_ERROR_TEXT	<i>TBD</i>	
VF_AGENT_LAST_POLICY_UPDATE	<i>Last policy update time in form DD-MMM-YYYY HH:MM</i>	
VF_AGENT_COMPANYNAME	<i>Viewfinity</i> string. From version info.	
VF_AGENT_COPYRIGHT	<i>(c) Viewfinity Ltd. 2007-2011</i> string From vf_util.dll version info.	
Here start target-specific vars	Here start target-specific vars	
VF_TARGET_DISPLAY_NAME	A "friendly" target description. Depends on target type. Can be FileDescription property, ActiveX display name etc.	Win
VF_FILE_PATH	File path. Valid if target is file.	Win /macOS
VF_FILE_NAME	File name. Valid if target is file.	Win /macOS
VF_FILE_DESCRIPTION	File Description property from Version info. Valid if target is file.	Win
VF_VERSION	File Version property from Version/MSI info. Valid if target is file.	Win
VF_PRODUCT_VERSION	Product Version property from Version/MSI info. Valid if target is file.	Win
VF_PRODUCT_NAME	Product Name property from Version/MSI info. Valid if target is file.	Win
VF_COMPANYNAME_NAME	Company Name property from Version/MSI info. Valid if target is file.	Win /macOS
	For macOS - The second part of the Bundle Identifier is Company name.	
VF_LEGAL_COPYRIGHT	Legal Copyright property from Version info. Valid if target is file.	Win
VF_PUBLISHER	Publisher name from Digital Signature. Valid for digitally signed files	Win /macOS
VF_COMMAND_LINE	Command line. Valid if target is process.	Win /macOS
VF_CLSID	CLSID property. Valid for ActiveX installations.	Win
VF_CODE_URL	CodeURL property. Valid for ActiveX installations.	Win
VF_MIME_TYPE	MIME Type property. Valid for ActiveX installations.	Win
VF_IMAGE_NAME	ActiveX installation image (usually CAB file) name without path	Win
VF_ACCESS_TARGET	Target for restricted access: network url/ip:port, FS path, registry key	Win
VF_ACCESS_TYPE	Type of access: Internet/Intranet/Path/Registry/Process Memory	Win
VF_BUNDLE_NAME	(For macOS) The bundle display name is the name displayed underneath the application icon.	macOS
VF_BUNDLE_ID	(For macOS) The bundle identifier string identifies your application to the system. It being used in validating the application signature	macOS
VF_BUNDLE_VERSION	(For macOS) The bundle version string specifies the build version number of the bundle	macOS
VF_BUNDLE_PATH	(For macOS) The Bundle location is the technical location of the application	macOS

Different set of variables is available for different dialog types. As a rule, all agent-specific variables are always available. VF_ERROR_TEXT is never used except for specific dialog types. Target-specific variables are available on policy dialogs as described below.

Dialog type	Variables description
About, Restart Service, Apply Policies, Kill Apps	No target-specific variables

Screen Recording low disk	VF_ERROR_TEXT is legal; target-specific variables are available
LogOff / Restart / Shutdown	No target-specific variables. To be discussed further...
Manual Policy Request	No target-specific variables
Others	Target-specific variables are available

Policy internalType attribute values

internalType	Default Policy	Name	Comment
0		UNKNOWN	Should not be used
101	YES	DEFAULT_GREY_APPS_ON_ENDUSER_COMPS	
103	YES	DEFAULT_REMOVABLE_STORAGES	
104	YES	DEFAULT_DOWNLOADED_FROM_INET	
105	YES	DEFAULT_REMOVABLE_MONITOR	
200	YES	DEFAULT_WINDOWS_SYSTEM	
201	YES	DEFAULT_OLD_APPLICATIONS	
202	YES	DEFAULT_TEMP_FILES	
203	YES	DEFAULT_WINDOWS_MONITOR	
210		TRUSTED_SAMPLE_COMPUTER	
220		TRUSTED_NETWORK_LOCATION_MAIN	
221		TRUSTED_NETWORK_LOCATION_INSTALLED	
230		TRUSTED_PACKAGE_MAIN	
231		TRUSTED_PACKAGE_INSTALLED	
242		TRUSTED_DISTRIBUTOR_PREDEFINED	
243		TRUSTED_DISTRIBUTOR_CUSTOM	
244		TRUSTED_DISTRIBUTOR_INSTALLED	
263		TRUSTED_UPDATER_PREDEFINED	
264		TRUSTED_UPDATER_CUSTOM	
265		TRUSTED_UPDATER_INSTALLED	
280		TRUSTED_VENDOR_MAIN	
281		TRUSTED_VENDOR_INSTALLED	
285		TRUSTED_PRODUCT	
290		TRUSTED_USER_OR_GROUP_MAIN	
291		TRUSTED_USER_OR_GROUP_INSTALLED	
300		PREDEFINED_APP_GROUP	
400		CUSTOM_APP_GROUP	
500		EXPER	Advanced Policy
600		CONFIGURATION	
700		EXCLUDE	
800		TRUSTED_DISTRIBUTOR_PREDEFINED_DEFINITION	
810		TRUSTED_DISTRIBUTOR_CUSTOM_DEFINITION	
820		TRUSTED_UPDATER_PREDEFINED_DEFINITION	
830		TRUSTED_UPDATER_CUSTOM_DEFINITION	
900		INBOX	No longer used in 5.1
900001		INTERNAL_DEFAULT_PM	Never stored in XML
900002		INTERNAL_DEFAULT_AC	Never stored in XML

Alert triggers and dialog types

Note: Balloon type notification is applicable to all triggers

Policy Action	Valid Trigger	Corresponding dialog type
1 Normal Run	VF_TRIGGER_PROCESS_START	2 Alert on process start
	VF_TRIGGER_PROCESS_START_BY_ADMIN	2 Alert on process start
	VF_TRIGGER_AUDIT_VIDEO	7 Policy Video recording confirmation
	VF_TRIGGER_VIDEO_STARTING_SPLASH	17 Policy Video splash dialog
	VF_TRIGGER_AUDIT_VIDEO_LOW_DISK	10 Policy Video low disk space
	VF_TRIGGER_UAC_STD_USER	2 Alert on process start
	VF_TRIGGER_UAC_ADMIN_USER	2 Alert on process start
2 Block	VF_TRIGGER_PROCESS_BLOCKED	1 Process Blocked notification
	VF_TRIGGER_KILL_APPS	16 kill apps dialog
3 Elevate	VF_TRIGGER_PROCESS_START	3 Process Elevated notification
	VF_TRIGGER_PROCESS_START_BY_ADMIN	3 Process Elevated notification
	VF_TRIGGER_AUDIT_VIDEO	7 Policy Video recording confirmation
	VF_TRIGGER_VIDEO_STARTING_SPLASH	17 Policy Video splash dialog
	VF_TRIGGER_AUDIT_VIDEO_LOW_DISK	10 Policy Video low disk space
4 Elevate On Demand	VF_TRIGGER_EOD_UAC (for backward compatibility only)	4 Elevate On Demand
	VF_TRIGGER_UAC_STD_USER	4 Elevate On Demand
	VF_TRIGGER_UAC_ADMIN_USER	4 Elevate On Demand
	VF_TRIGGER_EOD_SHELL	4 Elevate On Demand
	VF_TRIGGER_AUDIT_VIDEO	7 Policy Video recording confirmation
	VF_TRIGGER_VIDEO_STARTING_SPLASH	17 Policy Video splash dialog
	VF_TRIGGER_AUDIT_VIDEO_LOW_DISK	10 Policy Video low disk space
	-	-
5 UAC usage	-	-
	-	-
	-	-
	-	-
6 Zero Touch	VF_TRIGGER_PA_QUALIFIED_EVENT	5 Zero Touch
	VF_TRIGGER_PA_QUALIFIED_EVENT_ADMIN	5 Zero Touch
	VF_TRIGGER_PA_NON_QUALIFIED_EVENT	8 Zero Touch Non-Qualified
	VF_TRIGGER_PA_MANUAL_REQUEST	6 Manual Policy Request
7 Log Off	VF_TRIGGER_USER_CONFIRMATION	11 LogOff / Restart / Shutdown warning
8 Computer Action	VF_TRIGGER_USER_CONFIRMATION	11 LogOff / Restart / Shutdown warning
9 Run Script	-	-
10 Config	VF_TRIGGER_ABOUT	9 About dialog
	VF_TRIGGER_REBOOT_REQUIRED	15 reboot after upgrade required
	VF_TRIGGER_APPLY_EXTERNAL_POLICIES	18 Apply policies dialog, GPO only
	VF_TRIGGER_POLICY_PROPAGATE	20 Propagate dialog, GPO only
	VF_TRIGGER_WEBPAGE_BEFORE_ELEVATE, VF_TRIGGER_WEBPAGE_ELEVATED, VF_TRIGGER_WEBPAGE_ELEVATE_DENIED	12 - VF_WEBPAGE_ON_ELEVATE, 13 - VF_WEBPAGE_ON_ELEVATE_DONE, 14 - VF_WEBPAGE_ON_ELEVATE_DENIED
	VF_TRIGGER_CHALLENGE_RESPONSE	21 - VF_DLG_CHALLENGE_RESPONSE, GPO only for the time being

14 Isolated Run	VF_TRIGGER_RUN_RESTRICTED	VF_DLG_RUN_RESTRICTED
	VF_TRIGGER_RESTRICTED_ACCESS	VF_DLG_RESTRICTED_ACCESS

EvfAdminTaskId

Admin task ids and names

Value name	Value	Display name	MMC Snap-in
VFAT_ACCESSIBILITY_ETC	1	Accessibility, Keyboard, Mouse etc	
VFAT_DISPLAY_ETC	2	Display, Colors, Fonts, Visual Effects	
VFAT_REGIONAL_LANGUAGE	3	Region and Language	
VFAT_DATE_TIME	4	Date and Time	
VFAT_WIN_BACKUP	5	Windows Backup and Restore	
VFAT_SYS_RESTORE	6	System Restore	
VFAT_SYS_REPAIR_DISK	7	Create a System Repair Disk	
VFAT_PROGRAMS_FEATURES	8	Programs and Features	
VFAT_AUTO_UPDATE	9	Automatic Updates configuration	
VFAT_DISK_DEFRAGMENT	10	Disk Defragmenter	
VFAT_INDEXING_OPTIONS	11	Search Indexing	
VFAT_DISK_MANAGEMENT	12	Disk Management	
VFAT_POWER_OPTIONS	13	Power Options	
VFAT_SYSTEM_PROPERTIES	14	System Properties	
VFAT_INTERNET_OPTIONS	15	Internet Options	
VFAT_WIN_FIREWALL	16	Windows Firewall	
VFAT_HARDWARE	17	Hardware	
VFAT_MSC_MSCORCFG	18	.NET Configuration	mscorcfg.msc
VFAT_MSC_APPSRV	19	Application Server	appsrv.msc
VFAT_MSC_AZMAN	20	Authorization Manager	azman.msc
VFAT_MSC_CERTSRV	21	Certificate Services	certsrv.msc
VFAT_MSC_CERTTMPL	22	Certificate Templates	certtmpl.msc
VFAT_MSC_CERTMGR	23	Certificates snap-in	certmgr.msc
VFAT_MSC_DEVMGMT	24	Device Manager	devmgmt.msc
VFAT_MSC_DHCPMGMT	25	DHCP Manager	dhcpmgmt.msc
VFAT_MSC_DFRG	26	Disk Defragmenter	dfrg.msc
VFAT_MSC_DISKMGMT	27	Disk Management	diskmgmt.msc
VFAT_MSC_DFSGUI	28	Distributed File System	dfsgui.msc
VFAT_MSC_DNSMGMT	29	DNS Manager	dnsmgmt.msc
VFAT_MSC_EVENTVWR	30	Event Viewer	eventvwr.msc
VFAT_MSC_FXSADMIN	31	Fax Service Manager	fxsadmin.msc
VFAT_MSC_FILESVR	32	File Server Management	filesvr.msc
VFAT_MSC_CIADV	33	Indexing Service	ciadv.msc
VFAT_MSC_IAS	34	Internet Authentication Service	ias.msc
VFAT_MSC_IIS	35	Internet Information Services	iis.msc
VFAT_MSC_PERFMON	36	Performance Monitor	perfmon.msc
VFAT_MSC_TSMSC	37	Remote Desktop	tsmmc.msc
VFAT_MSC_NTMSMGR	38	Removable Storage Manager	ntmsmgr.msc
VFAT_MSC_NTMSOPRQ	39	Removable Storage Operator Requests	ntmsoprq.msc
VFAT_MSC_RSOP	40	Resultant Set of Policy	rsop.msc

VFAT_MSC_RRASMGMT	41	Routing and Remote Access	rrasgmt.msc
VFAT_MSC_SERVICES	42	Services Configuration	services.msc
VFAT_MSC_FSMGMT	43	Shared Folders	fsmgmt.msc
VFAT_MSC_SQLSERVERMANAGER	44	SQL Server Configuration Manager	SQLServerManager.msc
VFAT_MSC_TAPIMGMT	45	Telephony	tapingmt.msc
VFAT_MSC_TSCC	46	Terminal Services	tsc.msc
VFAT_MSC_WSUS	47	Update Services	wsus.msc
VFAT_MSC_WF	48	Windows Firewall	wf.msc
VFAT_MSC_WINSMGMT	49	Windows Internet Naming Service (WINS)	winsmgmt.msc
VFAT_MSC_WMIMGMT	50	Windows Management Instrumentation	wmimgmt.msc
VFAT_MSC_VIRTMGMT	51	Hyper-V Manager	virtmgmt.msc
VFAT_PRINTERS	52	Add/Remove Printers	
VFAT_NETWORK_PROPS	53	Network Configuration	
VFAT_MSC_GPEDIT	54	Group Policy Editor	gpedit.msc
VFAT_MSC_LUSRMGR	55	Local Users and Groups	lusrmgr.msc
VFAT_JAVA_UPDATE	56	Java Update	
VFAT_IIS_MANAGEMENT	57	Internet Information Services (IIS) Management	
VFAT_OPTIONAL_FEATURES	58	OptionalFeatures tab in ICP	
VFAT_MICROPHONE	59	Microphone tab in ICP	

LCD Policy

This chapter describes the structure of the <Policy> element when the action is 17 (LCD Policy).

Attributes

SecretKey string. Defines the secret key between eagles and the PVWA.

LCDIntervalSeconds unsigned int. seconds interval of changing the password.

LCDRetryIntervalSeconds unsigned int *Optional*. seconds interval of retries in case the agent is not connected to the internet.

Child elements:

Certificate element *Optional*. Client certificate contains 2 attributes: type and store location. The inner value of the elemnt will be added only in case of type 3.

Certificate Attributes:

Type: unsigned int. can be 1-3. 1 is EPM default. 2 is by fqdn and 3 is by inside value and issued by.

Store Name: unsigned int. The store name (personal, trusted authorities etc.).

We use the inner value only if the type is 3.

For example:

```
<Certificate Type="1" StoreName="5"> </Certificate>
```

```
<Certificate Type="3" StoreName ="5"> certname </Certificate>
```

(The server parses the enums into numbers and so does the PAS Agent back to object)

StoreName=5 is the default personal folder.

PVWAAddresses List of PVWA Address (string) .

LocalGroups List of Group and SIDs *Optional*. Indicates from which groups pas agent should retrieve the accounts. If its not define pas agent will retrieve the accounts from Administrators group only.

The SID is optional.

For example:

```
<LocalGroup SID="S-1-5-32-544">Administrators</LocalGroup>
```

Sample of the policy:

```
<Policy id="15452" order="1" action="17" name="[LCD POLICY EAGLES]" SecretKey="1234" LCDIntervalSeconds="50000"
LCDRetryIntervalSeconds="1000">
  <PVWAAddresses>
    <PVWAAddress>addr1</PVWAAddress>
    <PVWAAddress>addr2</PVWAAddress>
    <PVWAAddress>addr3</PVWAAddress>
  </PVWAAddresses>
```

```

<Certificate Type="1" StoreName="5"> certname </Certificate>
<LocalGroups>
  <LocalGroup SID="S-1-5-21-326923523-3941305716-766540770-1131">Administrators</LocalGroup>
</LocalGroups>
</Policy>

```

<LinuxCommand> element defines policy target. It can represent a script or binary file or many files if defines location, uses wildcards in the filename, etc.

Path 1: /Policies/Policy/Targets/LinuxCommand

Path 2: /Policies/ApplicationGroups/ApplicationGroup/LinuxCommand

Attributes

targetId	GUID.	Defines unique target ID. Can identify targets in Policy Audit events. Also, target ID is used to delete a target when a server sends changes within ApplicationGroup (see <DeletedTarget> element). If the <i>targetId</i> attribute is missing Agent generates a temporary target ID for internal use.						
childProcesses	String.	Applicable only when policy action is 3 (Elevate).						
		Possible values: "deny", "elevate", "default"						
		<table><tr><td>deny</td><td>all child processes are blocked</td></tr><tr><td>elevate</td><td>all child processes are allowed (elevated)</td></tr><tr><td>default</td><td>child processes are evaluated against policies. If a child process matches some Elevate policy it is allowed to run elevated, otherwise, it is denied.</td></tr></table>	deny	all child processes are blocked	elevate	all child processes are allowed (elevated)	default	child processes are evaluated against policies. If a child process matches some Elevate policy it is allowed to run elevated, otherwise, it is denied.
		deny	all child processes are blocked					
elevate	all child processes are allowed (elevated)							
default	child processes are evaluated against policies. If a child process matches some Elevate policy it is allowed to run elevated, otherwise, it is denied.							
mav	String . Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33", "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the <i>mav</i> attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the <i>mav</i> attribute value, the agent processes the policy target as usual. Default value: "0" . Meaning if the attribute is missing, then the agent processes the policy target as usual.						
trigger	String.	The attribute is added for "forward compatibility". Currently, its value should be always "sudo" string. If the attribute is missing or has any other value the current Linux Agent version must ignore such <LinuxCommand> element						
commandType	String . Optional.	Defines is Command binary or script. If not set explicitly to "script" or "binary" - default logic for properties works - any type will match						
sudoNoPassword	Boolean.	Defines if the current command can run without asking for the password.						
	Optional	Overrides the agent configuration definition for all other commands.						

Child elements

All child elements are optional. If a particular child element is missing corresponding policy parameter is not verified.

<Filename> Defines file name (without path) and optionally file hash.

<EnvVariables> Defines all Environment Variables that are Allowed and not Allowed use by that command.

Environment variables contains the next 2 lists <KeepList></KeepList> - Keep environment variables that will be allowed to use <DeleteList></DeleteList> Delete environment variables that will be not allowed to use

<LinkName> Defines the name of the SymLink used to launch the command. Technically we are using argv[0] param from the command line

<Arguments> Defines command-line arguments (if applicable). See the [EPM Policies XML format](#).

<Location> Defines file location.

<Interpreter> Defines allowed script interpreter. Is relevant only if command is "script". See [EPM for Linux - Policy Management and Policy Audit](#). Can be more than 1 <Interpreter> elements

<RunAsUser> Defines user used in sudo command

IDP Policy

This chapter describes the structure of the <Policy> element when the action is 24 (IDP Policy for linux or user control for windows).

Attributes

platform string. because there are 2 kind of policies with action 24 for linux and windows this attribute will defer them

Child elements:

- AllowIdentityBridging** bool. If made true we will authenticate users by identity bridging.
- AllowSSHKeys** bool. If made true we will authenticate users by ssh keys.
- AllowCertificates** bool . If made true we will authenticate users by a cerificate that has been installed in the agent prior(also from this policy).
- AllowedDomainPatterns** List of Domains (string) that we should accept.
- Certificate** string. the content of the certificate that we need to install on the agent.

```
<Policy id="78941" order="500" platform="Linux" action="24" name="idp test">
  <IDP AllowIdentityBridging="True" AllowSSHKeys="False" AllowCertificates="False">
    <AllowedDomainPatterns>
      <Domain>Domain 1</Domain>
      <Domain>Domain 2</Domain>
      <Domain>Domain 3</Domain>
    </AllowedDomainPatterns>
    <Certificate>
      this is
      the certificate
    </Certificate>
  </IDP>

  <UserGroupList>
    <IdpUser/>
    <IdpGroup/>
  </UserGroupList>

  <ExcludeUserGroupList>
    <User accountType="User">ival</User>
    <User accountType="Group">root</User>
    <IdpUser>irosenberg</IdpUser>
    <IdpGroup>idp_group_name</IdpGroup>
  </ExcludeUserGroupList>
</Policy>
```

<LinuxExclude> element

<LinuxExclude> target element defines target files/folders excluded by the EPM Linux Agent when applying policies.

- Note1:** The element can be added as a target only to a policy of type EXCLUDE (action=12)
- Note2:** The element cannot be added to ApplicationGroup
- Path:** /Policies/Policy/Targets/Exclude

Attributes

targetid	GUID.	Defines unique target ID. Can identify targets in Policy Audit events. Also, target ID is used to delete a target when the server sends changes within ApplicationGroup (see <DeletedTarget> element). If the targetid attribute is missing Agent generates a temporary target ID for internal use.
minav	String. Optional.	Defines minimal agent version. The string is a dot-delimited version string. All the following formats are valid: "11", "11.22", "11.22.33" "11.22.33.44". The Agent considers "missing" entries as zeros. I.e. "11.22" is equal to "11.22.0.0". If the current agent version is less than the version specified in the minav attribute value, the agent must ignore the policy target. If the current agent version is equal or greater than the version specified in the minav attribute value, the agent processes the policy target as usual. Default value: "0". Meaning if the attribute is missing, then the agent processes the policy target as usual.

Child elements

All child elements are optional. If a particular child element is missing corresponding policy parameter is not verified.

<FileName> - Defines file name (without path). If this element is missing filename is not used to identify the target. **Important:** When <FileName> element is a child of <Exclude>element it should **not** use **Hash** attribute.

<Location> - Defines file location. If this element is missing location is not used to identify the policy target.

<FileName> element

<FileName> element defines policy target file name without path and optionally file hash.

Path 1: /Policies/Policy/Targets/TargetType/FileName

Path 2: /Policies/ApplicationGroups/ApplicationGroup/TargetType/FileName

Where *TargetType* can be LinuxCommand, LinuxExclude

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual filename value with the expected filename value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regex</i> . (Values are case-insensitive) Default value: <i>wildcards</i>
caseSensitive	Boolean.	
hash	String. Depends on hashAlgorithm attribute presence.	File hash value. This attribute is valid only if hashAlgorithm attribute is present.
hashAlgorithm	String. Depends on hash attribute presence.	Id of the algorithm used to calculate the hash. This attribute is valid only if hash attribute is present. Supported values: "ZLIB:CRC32", "MD5", "SHA1", "SHA256", "PEHASH:SHA256", "AUTHENTHASH" <u>Note:</u> If hash and hashAlgorithm attributes do not exist in the FileName element, then hash is not used to identify policy target files.
fileSize	Number. Optional.	Defines file size value, in bytes.

Child elements

No child elements.

Element text

The element text defines the file name without a path.

<LinkName> element

<LinkName> element defines symlink name used to launch the binary. See the "Command name" parameter in the [EPM for Linux - Policy Management and Policy Audit](#).

Path 1: /Policies/Policy/Targets/TargetType/LinkName

Path 2: /Policies/ApplicationGroups/ApplicationGroup/TargetType/LinkName

Where *TargetType* can be LinuxCommand

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual filename value with the expected filename value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regex</i> . Default value: <i>wildcards</i>
caseSensitive	Boolean.	If True the value comparison is case-sensitive, otherwise the case is ignored.

Child elements

No child elements.

Element text

The element text defines the link name without a path.

<Arguments> element

<Arguments> element defines command line arguments passed to the target process.

Path 1: [/Policies/Policy/Targets/TargetType/Arguments](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/Arguments](#)

Where *TargetType* can be LinuxCommand

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regexp</i> . Default value: <i>exact</i>
caseSensitive	Boolean. Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: True.
void	Boolean. Optional.	If True indicates that user requests that command arguments are set and must be empty Default value: False.

Child elements

No child elements.

Element text

The element text defines command line arguments.

<Location> element

<Location> element defines policy target location without file name

Path 1: [/Policies/Policy/Targets/TargetType/Location](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/TargetType/Location](#)

Where *TargetType* can be LinuxCommand

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regexp</i> . Default value: <i>wildcards</i>						
caseSensitive	Boolean.	If True the value comparison is case-sensitive, otherwise the case is ignored.						
subfolders	Boolean. Optional.	If True location includes subfolders. Otherwise, it includes the specified folder only. Default value: True .						
locationType	String. Optional.	Represents a comma-separated list of drive types covered by the element. Substrings are case insensitive. E.g. "FIXED, CDROM" means hard-drives and CD/DVD drives. Default value: "ANY". Possible substrings: <table><tr><td>ANY</td><td>Any location type (default)</td></tr><tr><td>REMOVABLE</td><td>The drive has removable media; for example, a floppy drive, thumb drive, or flash card reader.</td></tr><tr><td>FIXED</td><td>The drive has fixed media; for example, a hard disk drive or flash drive.</td></tr></table>	ANY	Any location type (default)	REMOVABLE	The drive has removable media; for example, a floppy drive, thumb drive, or flash card reader.	FIXED	The drive has fixed media; for example, a hard disk drive or flash drive.
ANY	Any location type (default)							
REMOVABLE	The drive has removable media; for example, a floppy drive, thumb drive, or flash card reader.							
FIXED	The drive has fixed media; for example, a hard disk drive or flash drive.							

		REMOTE	The drive is a remote (network) drive.
		CDROM	The drive is a CD-ROM drive.
		RAMDISK	The drive is a RAM disk.
		See also GetDriveType API description.	

Child elements

No child elements.

Element text

The element text defines file location (path without a name).

<Interpreter> element

<Interpreter> element defines allowed script interpreter. Applicable to LinuxScript target only.

Can be any number of elements <Interpreter>

Path 1: [/Policies/Policy/Targets/LinuxCommand/Interpreter](#)

Path 2: [/Policies/ApplicationGroups/ApplicationGroup/LinuxCommand/Interpreter](#)

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual property value with the expected value. Possible values: <i>exact</i> , <i>prefix</i> , <i>contains</i> , <i>wildcards</i> , <i>regexp</i> . Default value: <i>regexp</i>
caseSensitive	Boolean. Optional.	If True the value comparison is case-sensitive, otherwise the case is ignored. Default value: True.

Child elements

No child elements.

Element text

The element text defines command line arguments.

<RunAsUser> element

<RunAsUser> element is a parent element for collection of <User> elements. Defines user accounts allowed for sudo command. See "Run as user" parameter at the PRD doc [EPM for Linux - Policy Management and Policy Audit](#).

See also the XML example below.

Path: [/Policies/Policy/LinuxCommand/RunAsUser](#)

Attributes

compareAs	String. Optional.	Defines how the agent should compare the actual property values in the list with the expected value. Possible values: <i>exactIn</i> , <i>exactNotIn</i> , <i>wildcards</i> . Default value: <i>exactIn</i>
------------------	----------------------	---

Child elements

<User> element.

<AllowedInterpreters> element

<AllowedInterpreters> element contains list of allowed Interpreters that can be at shebang line of OS scripts. Can be only in Configuration policy.

See also the XML example below.

Path: [/Policies/Policy/Configuration/Policies/AllowedInterpreters](#)

Attributes

No attributes.

Child elements

No child elements.

Element text

The element text defines list of allowed interpreters in OS scripts - same as defined by shebang lines.

Each element is absolute filename enclosed in double quotes.

Elements separated by comma.

XML Example

```
<Policies changeId="1" merge="True" version="5">

  <Policy name="Elevate Sudo commands" id="15045" order="210" action="3" reportUsage="1" mav="21.8" useUtcTime="true"
startTime="2021.08.23 14:15" endTime="2021.08.24 12:30">
  <Scheduler weekdays="0110110" startTime="00:00" endTime="24:00"/>

  <UserGroupList>
    <User accountType="user">.\jane</User>
    <User accountType="group">IL\Sales</User>
  </UserGroupList>

  <Targets>

    <LinuxCommand targetId="{2eb4b2d5-4bdf-428d-b162-834b6334b05a}" trigger="sudo" childProcs="default" commandT
ype="binary" sudoNoPassword="false" >
      <FileName compareAs="exact" caseSensitive="true" hash="B56885721A77A60A50EA3BC619FBA6618CFA611C" hashAlgor
ithm="SHA1" fileSize="25194">systemctl</FileName>
      <LinkName compareAs="exact" caseSensitive="true">reboot</LinkName>
      <Location compareAs="wildcards" caseSensitive="true" subfolders="true" locationType="FIXED">/usr/b?n</Loca
tion>
      <Arguments compareAs="wildcards" caseSensitive="true">- l?</Arguments>
      <EnvVariables>
        <KeepList>COLORS, DISPLAY, *, *D, USERNAME</KeepList>
        <DeleteList>LC_ADDRESS, LC_CTYPE</DeleteList>
      </EnvVariables>
      <RunAsUser compareAs="wildcards">
        <User>mary</User>
        <User>john</User>

        <User>users*</User>
      </RunAsUser>

    </LinuxCommand>

    <LinuxCommand targetId="{EEC3F433-6EB6-470A-A89A-D4D2E468FFCE}" trigger="sudo" childProcs="elevate">
      <FileName compareAs="exact" caseSensitive="true" hash="A25885721A77A60A50BBB6C619FBA6618CFA9438" hashAlgor
ithm="SHA1" fileSize="1528">my_script.sh</FileName>
      <LinkName compareAs="exact" caseSensitive="true">your_script.sh</LinkName>
      <Location compareAs="wildcards" caseSensitive="true" subfolders="true" locationType="FIXED">/usr/b?n</Loca
```

```
tion>
<Arguments compareAs="exact" caseSensitive="true">-do-something</Arguments>
<EnvVariables>
    <KeepList>COLORS, DISPLAY, *, *D, USERNAME</KeepList>
    <DeleteList>LC_ADDRESS, LC_CTYPE</DeleteList>
</EnvVariables>
<RunAsUser compareAs="exactIn">
    <User>anne</User>
    <User>jacob</User>
</RunAsUser>
<Interpreter>/bin/bash</Interpreter>
<Interpreter>/bin/zsh</Interpreter>
<Interpreter>/bin/ksh</Interpreter>
<Interpreter>/bin/csh</Interpreter>
</LinuxCommand>

</Targets>

</Policy>

<Policy id="28921" order="147" action="TBD" name="...">
    <IDP AllowIdentityBridging="True" AllowSSHKeys="False" AllowCertificates="False">
        <AllowedDomainPatterns>
            <Domain>Domain 1</Domain>
            <Domain>Domain 2</Domain>
            <Domain>Domain 3</Domain>
        </AllowedDomainPatterns>
        <Certificate>
            sdddddssss;sdfklsdk;sdaklj;sdalkj;sadlkj;sdlak
            asdasdsadasssssssssdddddddddd
        </Certificate>
    </IDP>
</Policy>

<Policy name="Exclude on Linux" id="15046" order="1" action="12" excludeType="all">
    <Targets>
        <LinuxExclude targetId="{1234b2d5-4bdf-428d-b162-834b6334b05a}">
            <FileName compareAs="exact" caseSensitive="true">mcafee</FileName>
            <Location compareAs="wildcards" caseSensitive="true" subfolders="true">/usr/b?n</Location>
        </LinuxExclude>
    </Targets>
</Policy>

<Policy id="79" order="4000" action="10" name="Default agent configuration" internalUpgradeDiscoverSourceURL="true" internalUpgradeMonitorSipFiles="true">
    <Alert type="Dialog" id="{18b1a37d-176b-4510-9d8c-8922c0fe4e4a}" trigger="10"/>
    <Configuration>
        <Connection>
            <IgnoreIncorrectCertificates>False</IgnoreIncorrectCertificates>
            <DisconnectTimeout>301</DisconnectTimeout>
            <SOAPTimeout>34</SOAPTimeout>
            <UseNativeWinHttp4TLS12>True</UseNativeWinHttp4TLS12>
            <AccessTokenRefreshTime>7202</AccessTokenRefreshTime>
        </Connection>
        <PASProtection>
            <PASVersion>3.20.0.2</PASVersion>
            <FlushIntervalSec>5</FlushIntervalSec>
            <MaxBytesPerHour>10485760</MaxBytesPerHour>
            <AggregationInterval>600</AggregationInterval>
            <RestartPASAgentMaxTimes>5</RestartPASAgentMaxTimes>
            <CollectProtectedAccounts>False</CollectProtectedAccounts>
            <ProtectedAccountsInterval>12</ProtectedAccountsInterval>
        </PASProtection>
        <Common>
            <ProtPass/>
            <DomainId>000000000-0000-0000-0000-000000000000</DomainId>
            <BootStartDriver>False</BootStartDriver>
            <CollectAgentTrace>True</CollectAgentTrace>
            <WellKnownPublishers>
                "Acronis", "Adobe Systems", "Aladdin Knowledge", "Altiris", "Apple Inc.", "AT&T Mobility",
                "Autodesk", "AVAST Software", "AVG Technologies", "Broadcom Corporation", "Brother
Industries",
                "CANON INC.", "Check Point", "Cisco Systems", "Citrix Online", "CyberArk Software Ltd.",
"Dell", "EMC Corporation", "Epson",
                "ESET", "Flexera Software", "Google", "Hewlett-Packard", "Hitachi", "IBM", "Intel
Corporation",
                "Kaspersky Lab", "Lexmark International", "LogMeIn", "McAfee", "Microsoft", "Mozilla
Corporation".
```



```

        "Nokia", "Opera Software", "Research In Motion", "Salesforce.com", "Samsung Electronics",
        "SEIKO EPSON Corporation", "Skype Technologies SA", "Sophos", "Sun Microsystems",
        "Symantec",
        "TechSmith", "Viewfinity Inc.", "VMware", "WebEx Communications", "WinZip Computing"
    </WellKnownPublishers>
    <PolicyUsageInTrace>1</PolicyUsageInTrace>
    <ProtectUserGroups>1</ProtectUserGroups>
    <NetworkShareSupport>Full</NetworkShareSupport>
    <CmdClientValidation>Strong</CmdClientValidation>
    <NewFilesInTrace>False</NewFilesInTrace>
</Common>
<DataCollection>
    <SendPolicyUsage>True</SendPolicyUsage>
    <RushMode>False</RushMode>
    <NewFileEvents>
        <Send>False</Send>
    </NewFileEvents>
    <CollectFullMeshData>False</CollectFullMeshData>
    <ReportWindowsFiles>False</ReportWindowsFiles>
    <PidInRestrictionEvents>True</PidInRestrictionEvents>
    <KeepPolicyUsageForDays>30</KeepPolicyUsageForDays>
    <PolicyUsageFlushIntervalSec>120</PolicyUsageFlushIntervalSec>
    <KeepPrivLackForDays>30</KeepPrivLackForDays>
    <PrivLackFlushIntervalSec>60</PrivLackFlushIntervalSec>
    <MaxEventsSizeInMemory>20971520</MaxEventsSizeInMemory>
    <MaxEventsSizeOnDisk>209715200</MaxEventsSizeOnDisk>
    <MaxHourlyEvents>
        <PrivLack>250</PrivLack>
        <File>100</File>
        <PolicyUsage>200</PolicyUsage>
        <Restrict>100</Restrict>
        <NetAccess>500</NetAccess>
    </MaxHourlyEvents>
    <WriteWMI>false</WriteWMI>
    <WriteEventLog>False</WriteEventLog>
    <ToReportTempFiles>False</ToReportTempFiles>
    <ExtendedPrivacy>False</ExtendedPrivacy>
    <ExtendedPrivacyScript>
        <Run>False</Run>
        <EmbeddedScript>
            <ScriptName/>
            <ScriptContent><![CDATA[]]></ScriptContent>
        </EmbeddedScript>
    </ExtendedPrivacyScript>
    <SystemUserEvents>True</SystemUserEvents>
    <SendUserGroups>True</SendUserGroups>
    <RunEventsOnceOnly>False</RunEventsOnceOnly>
    <FullLogMaxSize>10000000000</FullLogMaxSize>
    <VfnetNotifyOnConnect>False</VfnetNotifyOnConnect>
    <FileExts>EXE;MSI;MSP;MSU;DLL</FileExts>
    <IncludeDlls>True</IncludeDlls>
    <!-- VfSip/ -->
    <VfSip>GnR8LLNcTGA=</VfSip>
    <OperationalStatusIndicationIntervalSec>60</OperationalStatusIndicationIntervalSec>
</DataCollection>
<Policies>
    <DiscoverSourceURL>True</DiscoverSourceURL>
    <MonitorSipFiles>False</MonitorSipFiles>
    <UseExtAttrs>True</UseExtAttrs>
    <DiscoverSourceEmail>False</DiscoverSourceEmail>
    <MonitorSystemProcess>True</MonitorSystemProcess>
    <RestBatchCmdLineSym>True</RestBatchCmdLineSym>
    <ProtectFilesByElevInst>False</ProtectFilesByElevInst>
    <ExcludeAllSystemProcs>False</ExcludeAllSystemProcs>
    <ScriptsDigitalSignature>True</ScriptsDigitalSignature>
    <BlockDetoursLoading>False</BlockDetoursLoading>
    <ShellToolsFolder>
        <ShowDesktopIcon>True</ShowDesktopIcon>
        <DesktopIcon>DEFAULT</DesktopIcon>
    </ShellToolsFolder>
    <HookCcmExec>True</HookCcmExec>
    <HeartBeatTimeout>60</HeartBeatTimeout>
    <FailTimeout>300</FailTimeout>
    <ScriptTimeout>10</ScriptTimeout>
    <DNSResolveTTL>3600</DNSResolveTTL>
    <PolicyUpdate>
        <Rate>0</Rate>
    </PolicyUpdate>
</Policies>

```

```

        <Time>3600</Time>
        <RandomDelay>600</RandomDelay>
    </PolicyUpdate>
    <PolicyRecording>
        <KeepMoviesTimeoutInDays>14</KeepMoviesTimeoutInDays>
        <MinFreeDiskSpaceInMb>1024</MinFreeDiskSpaceInMb>
        <MaxUsedDiskSpaceInMb>2048</MaxUsedDiskSpaceInMb>
        <MaximumMovieLengthInMinutes>10</MaximumMovieLengthInMinutes>
        <AllowProgramRunIfNoRecording>true</AllowProgramRunIfNoRecording>
        <MovieStorageDrive>*</MovieStorageDrive>
        <LocationType>0</LocationType>
        <BitRate>83886080</BitRate>
        <Retries>10</Retries>
        <RetryTimeout>600</RetryTimeout>
    </PolicyRecording>
    <MacOSAllowRootDelegationForRootPrograms>True</MacOSAllowRootDelegationForRootPrograms>
    <MacOSProhibitSudoersFileModification>1</MacOSProhibitSudoersFileModification>
    <ValidateOTP>True</ValidateOTP>
    <ImageFileValidation>True</ImageFileValidation>
    <SudoOptionsIgnored>"-E", "--preserve-env"</SudoOptionsIgnored>
    <MacOSMuteFilesToBeIgnoredAlways>False</MacOSMuteFilesToBeIgnoredAlways>
    <AllowedInterpreters>"/usr/bin/bash", "/bin/bash", "/usr/bin/sh", "/bin/sh", "/usr/bin/zsh"</Allowed
Interpreters>
    <LinuxDefaultEnvVariables>
        <DefaultKeepList>
            COLORS, DISPLAY, HOSTNAME, HISTSIZE, KDEDIR, LS_COLORS, MAIL, PS1, PS2, QTDIR,
            USERNAME, LANG, LC_ADDRESS, LC_CTYPE, LC_COLLATE, LC_IDENTIFICATION,
            LC_MEASUREMENT, LC_MESSAGES, LC_MONETARY, LC_NAME, LC_NUMERIC, LC_PAPER ,
            LC_TELEPHONE, LC_TIME, LC_ALL, LANGUAGE, LINGUAS, _XKB_CHARSET, XAUTHORITY, TEMP
        </DefaultKeepList>
        <DefaultDeleteList>
            IFS, CDPATH, LOCALDOMAIN, RES_OPTIONS,
            HOSTALIASES, NLSPATH, PATH_LOCALE, LD_LIBRARY_PATH,
            TERINFO, TERINFO_DIRS, TERMPATH, TERMCAP,
            ENV, BASH_ENV, PS4, GLOBIGNORE, SHELOPTS,
            JAVA_TOOL_OPTIONS, PERLIO_DEBUG, PERLLIB, PERL5LIB,
            PERL5OPT, PERL5DBFPATH, NULLCMD, READNULLCMD,
            ZDOTDIR, TMPPREFIX, PYTHONHOME, PYTHONPATH,
            PYTHONINSPECT, RUBYLIB, RUBYOPT
        </DefaultDeleteList>
    </LinuxDefaultEnvVariables>
</Policies>
<EndUserNotifications>
    <ShowBalloonTips>True</ShowBalloonTips>
    <ShowTrayIcon>True</ShowTrayIcon>
    <TrayIcon>DEFAULT</TrayIcon>
    <HideRunAsVerb>False</HideRunAsVerb>
    <HideARPEnter>False</HideARPEnter>
    <ShowFilePropPage>True</ShowFilePropPage>
    <HideGetSupportInfo>False</HideGetSupportInfo>
    <ShowBalloonOnPolicyUpdate>True</ShowBalloonOnPolicyUpdate>
    <RefreshDesktopOnPolicyUpdate>True</RefreshDesktopOnPolicyUpdate>
    <ShowIntroWebPage>True</ShowIntroWebPage>
    <UseTabbedBrowsing>False</UseTabbedBrowsing>
    <SudoGraceValidationPeriod>30</SudoGraceValidationPeriod>

    <SudoNoPassword>>false</SudoNoPassword>
<AllowedPreloader>
    <Preloader>
        <Path></Path>
        <Checksum></Checksum>
    </Preloader>
</AllowedPreloader>
</EndUserNotifications>
<RemoteInstallation>
    <DiscoveryCancelTimeout>120000</DiscoveryCancelTimeout>
    <InstallationCancelTimeout>300000</InstallationCancelTimeout>
</RemoteInstallation>
<Network>
    <DownloadTimeout>300000</DownloadTimeout>
    <PingTimeout>1000</PingTimeout>
</Network>
<ChallengeResponse>
    <EnableChallengeResponse>False</EnableChallengeResponse>
    <EnableRunWithAuthorizationToken>False</EnableRunWithAuthorizationToken>
    <RunWithAuthorizationToken>Run with Authorization Token</RunWithAuthorizationToken>
    <NumberOfAttempts>3</NumberOfAttempts>

```

```
<DecryptionPublicCertificate/>
<ShortCodeEncryptionPhrase/>
<UserGroup/>
  <UserGroupName>Valid Domain User/Group should be provided.</UserGroupName>
</ChallengeResponse>
<SuspendPolicies>
  <EnableSuspendPolicies>True</EnableSuspendPolicies>
  <UserGroup/>
    <UserGroupName>BUILTIN\Administrators</UserGroupName>
  </SuspendPolicies>
<ElevationAuthorizationGroup>
  <EnableElevationAuthorizationGroup>False</EnableElevationAuthorizationGroup>
  <UserGroup>S-1-5-32-544</UserGroup>
  <UserGroupName>Administrators</UserGroupName>
</ElevationAuthorizationGroup>
<AzureActiveDirectory>
  <TenantID>Tenant ID</TenantID>
  <ClientID>Client ID</ClientID>
  <EnableAzureAD>False</EnableAzureAD>
  <ClientSecret/>
</AzureActiveDirectory>
<IdaptiveIntegration>
  <IdaptiveTenantId/>
  <IdaptiveTimeout>10</IdaptiveTimeout>
</IdaptiveIntegration>
</Configuration>
<Messages>
  <Message id="VF_SF_FOLDER_NAME">CyberArk EPM Control Panel</Message>
  <Message id="VF_SHELL_ELEVATE_MENU_TEXT">Run with Elevated Privileges</Message>
  <Message id="VF_SHELL_CHALLENGERESPONSE_MENU_TEXT">Request Authorization</Message>
</Messages>
</Policy>
</Policies>
```