

Google Ads API Tool — Design Document

AutoNext Treinamento IA — internal campaign-management tool

Manager account (MCC): 959-190-4950 · Contact: ericoengcomp@gmail.com · Website: <https://ericorenato.com.br> · Case ID: 29991341264

1. Overview

AutoNext Treinamento IA is a marketing/SEM agency and training company. We operate Google Ads campaigns exclusively for accounts linked under our own manager account (MCC **959-190-4950**). This document describes an **internal, self-hosted tool** that uses the Google Ads API to create, update, pause and report on campaigns, ad groups, responsive search ads, budgets and keywords.

The tool is operated by our own employees through an AI-assisted operator workflow with a human in the loop: the operator reviews and approves every write operation before it is sent to the API. The tool is not resold, not exposed to the public, and only manages accounts we own or manage under our MCC.


2. Access model & expected usage

Attribute	Value
Access level requested	Basic access
Users	Internal only — agency employees
Accounts operated	Only accounts linked under our MCC 959-190-4950
Third-party tool?	No — the tool is developed and hosted in-house
App Conversion Tracking / Remarketing API	Not used
Expected volume	A few hundred operations per day (well within Basic access limits)
Hosting	Self-hosted infrastructure (our own VPS), private network access only

3. Architecture

The tool is a Python service exposing the Google Ads API as a set of typed operations to an internal AI-assisted operator interface. It talks directly to the API through the **official Google Ads client library for Python (google-ads, PyPI)** — reads use GAQL via `GoogleAdsService.search`, and writes use the per-entity `mutate_*` services. No unofficial or reverse-engineered endpoints are used.



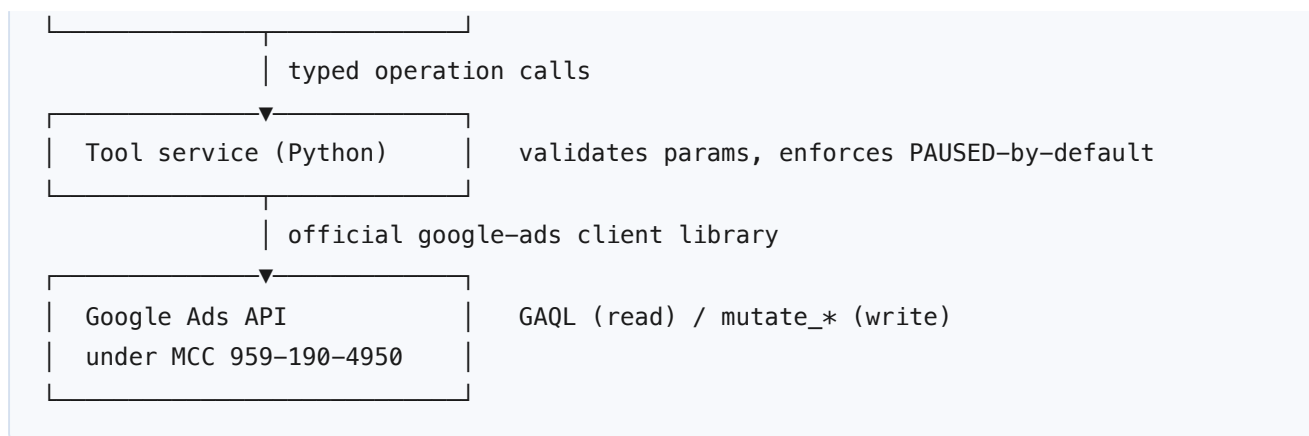

Safety controls

- **Human-in-the-loop:** no write reaches the API without an operator explicitly approving it.
- **Created entities start PAUSED** by default, so nothing spends money accidentally.
- **Scoped to our MCC:** the operated customer ID is validated per request; the tool never touches accounts outside our manager account.
- Errors from the API are surfaced verbatim to the operator (error code + message) — no silent failures.

4. Authentication & credentials

Authentication uses **OAuth 2.0** with a Desktop-app client created in our Google Cloud project. A long-lived refresh token is generated once via a headless OAuth flow and stored as an environment variable on our own server. The OAuth consent screen is published ("In production") so the refresh token does not expire.

- The authorizing Google account is the owner of the MCC and the managed campaigns.
- Credentials (`developer token` , `client_id` , `client_secret` , `refresh_token` , `login_customer_id`) live only in a private, git-ignored environment file on the server — never committed to source control and never sent to any third party.
- The developer token is associated with our MCC 959-190-4950.

5. Google Ads API operations used

The tool exposes typed operations grouped by entity. Reads are GAQL queries; writes are the corresponding mutate services. Representative operations:

Entity	Read (GAQL / service)	Write (mutate service)
Account	list accessible customers, current customer	—
Campaign	list / get campaigns	create · update · pause · resume · remove
Campaign budget	list budgets	create · update
Ad group	list ad groups	create · update · pause · remove
Ad (Responsive Search Ad)	list ads	create · pause · remove

Keyword	list keywords	add · add negative · pause · remove
Reporting	performance insights, search-terms report, ad-hoc GAQL	—

Monetary values are handled in micros (1 account-currency unit = 1,000,000 micros), consistent with the API.

6. Data storage & privacy

- The tool does **not** store end-user personal data. It reads and writes only campaign configuration and aggregate performance metrics returned by the API.
- No data is shared with third parties. All processing happens on our own self-hosted infrastructure.
- Access to the tool is restricted to authenticated agency employees on a private network.
- We keep our API contact email up to date and will respond to any notices from the Google Ads API team.

Compliance: the tool operates only on accounts under our own MCC, uses the official Google Ads client library, keeps entities paused until an operator approves them, and stays well within Basic access volume limits. It accepts and complies with the Google Ads API Terms and Conditions.