

performed the network of Ciresan et al. [1]. Furthermore, we show results for cell segmentation in light microscopy images from the ISBI cell tracking challenge 2015. Here we won with a large margin on the two most challenging 2D transmitted light datasets.

2 Network Architecture

The network architecture is illustrated in Figure 1. It consists of a contracting path (left side) and an expansive path (right side). The contracting path follows the typical architecture of a convolutional network. It consists of the repeated application of two 3x3 convolutions (unpadded convolutions), each followed by a rectified linear unit (ReLU) and a 2x2 max pooling operation with stride 2 for downsampling. At each downsampling step we double the number of feature channels. Every step in the expansive path consists of an upsampling of the feature map followed by a 2x2 convolution (“up-convolution”) that halves the number of feature channels, a concatenation with the correspondingly cropped feature map from the contracting path, and two 3x3 convolutions, each followed by a ReLU. The cropping is necessary due to the loss of border pixels in every convolution. At the final layer a 1x1 convolution is used to map each 64-component feature vector to the desired number of classes. In total the network has 23 convolutional layers.

To allow a seamless tiling of the output segmentation map (see Figure 2), it is important to select the input tile size such that all 2x2 max-pooling operations are applied to a layer with an even x- and y-size.

3 Training

The input images and their corresponding segmentation maps are used to train the network with the stochastic gradient descent implementation of Caffe [6]. Due to the unpadded convolutions, the output image is smaller than the input by a constant border width. To minimize the overhead and make maximum use of the GPU memory, we favor large input tiles over a large batch size and hence reduce the batch to a single image. Accordingly we use a high momentum (0.99) such that a large number of the previously seen training samples determine the update in the current optimization step.

The energy function is computed by a pixel-wise soft-max over the final feature map combined with the cross entropy loss function. The soft-max is defined as $p_k(\mathbf{x}) = \exp(a_k(\mathbf{x})) / \left(\sum_{k'=1}^K \exp(a_{k'}(\mathbf{x})) \right)$ where $a_k(\mathbf{x})$ denotes the activation in feature channel k at the pixel position $\mathbf{x} \in \Omega$ with $\Omega \subset \mathbb{Z}^2$. K is the number of classes and $p_k(\mathbf{x})$ is the approximated maximum-function. I.e. $p_k(\mathbf{x}) \approx 1$ for the k that has the maximum activation $a_k(\mathbf{x})$ and $p_k(\mathbf{x}) \approx 0$ for all other k . The cross entropy then penalizes at each position the deviation of $p_{\ell(\mathbf{x})}(\mathbf{x})$ from 1 using

$$E = \sum_{\mathbf{x} \in \Omega} w(\mathbf{x}) \log(p_{\ell(\mathbf{x})}(\mathbf{x})) \quad (1)$$

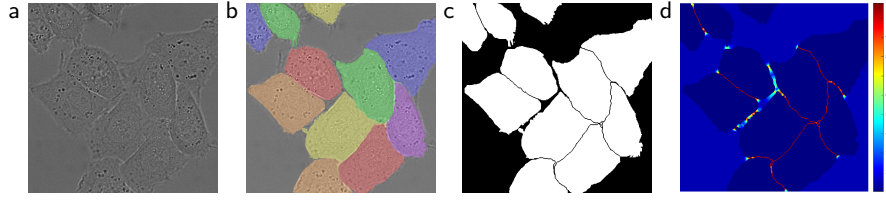


Fig. 3. HeLa cells on glass recorded with DIC (differential interference contrast) microscopy. **(a)** raw image. **(b)** overlay with ground truth segmentation. Different colors indicate different instances of the HeLa cells. **(c)** generated segmentation mask (white: foreground, black: background). **(d)** map with a pixel-wise loss weight to force the network to learn the border pixels.

where $\ell : \Omega \rightarrow \{1, \dots, K\}$ is the true label of each pixel and $w : \Omega \rightarrow \mathbb{R}$ is a weight map that we introduced to give some pixels more importance in the training.

We pre-compute the weight map for each ground truth segmentation to compensate the different frequency of pixels from a certain class in the training data set, and to force the network to learn the small separation borders that we introduce between touching cells (See Figure 3c and d).

The separation border is computed using morphological operations. The weight map is then computed as

$$w(\mathbf{x}) = w_c(\mathbf{x}) + w_0 \cdot \exp\left(-\frac{(d_1(\mathbf{x}) + d_2(\mathbf{x}))^2}{2\sigma^2}\right) \quad (2)$$

where $w_c : \Omega \rightarrow \mathbb{R}$ is the weight map to balance the class frequencies, $d_1 : \Omega \rightarrow \mathbb{R}$ denotes the distance to the border of the nearest cell and $d_2 : \Omega \rightarrow \mathbb{R}$ the distance to the border of the second nearest cell. In our experiments we set $w_0 = 10$ and $\sigma \approx 5$ pixels.

In deep networks with many convolutional layers and different paths through the network, a good initialization of the weights is extremely important. Otherwise, parts of the network might give excessive activations, while other parts never contribute. Ideally the initial weights should be adapted such that each feature map in the network has approximately unit variance. For a network with our architecture (alternating convolution and ReLU layers) this can be achieved by drawing the initial weights from a Gaussian distribution with a standard deviation of $\sqrt{2/N}$, where N denotes the number of incoming nodes of one neuron [5]. E.g. for a 3x3 convolution and 64 feature channels in the previous layer $N = 9 \cdot 64 = 576$.

3.1 Data Augmentation

Data augmentation is essential to teach the network the desired invariance and robustness properties, when only few training samples are available. In case of